

APRIL 20, 1980

MAY 27

A CAHNERS PUBLICATION

76, 242, 278 320


# EDN

EXCLUSIVELY FOR DESIGNERS AND DESIGN MANAGERS IN ELECTRONICS

Universal active filters  
require easily learned  
design techniques

Floating-point package  
enhances Z8000's power

Offsetting, linearization  
up transducer performance

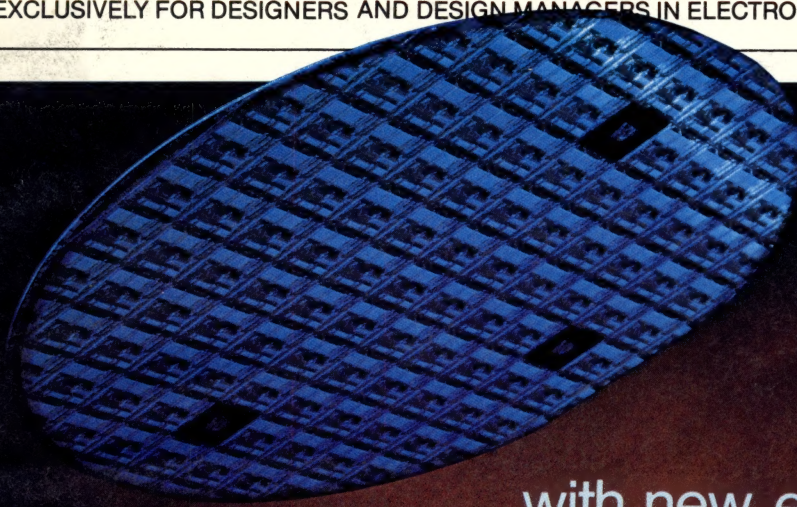

Electro/80—  
Close encounters  
with new electronics technology



Fluke Portable Test Instruments

# Modular temperature logger: PTI stacks up.

With today's tight budgets and spiraling costs, your instrument investments have to work hard for you. That's why we designed Portable Test Instruments (PTI) to work double time.

As single instruments, they adapt to a variety of individual measurement and recording assignments. But stack a 2180A or

2190A Thermometer with the 2030A Computing Printer and the new 2300A Scanner and you've created a compact temperature logging system.

It's simple to use, simple to operate, and occupies just inches of space. And with a choice of ac or 12V dc operation—the unit is completely portable.

## High-accuracy RTD or T/C measurements.

This little system boasts accuracy specs that stand up to even laboratory standards. As a matter of fact, we designed the 2300A Scanner as a measurement match to our most accurate thermometers: the 2180A and 2190A series. Together they handle as many as 100 channels of temperature (20 channels maximum in mainframe) from five types of either RTD or thermocouple sensors.

## Computer I/O via RS-232-C or IEEE-488


You can program and control the system remotely as a low-cost computer front-end via RS-232-C or IEEE-488.

The thermometer makes all linearizations, then transmits temperature readings to the computer,

minimizing software requirements.

**Call 800-426-0361**

Or mail the coupon below. We'll show you how to transform PTI modules into a high-accuracy logging system that stacks up to today's electronics.

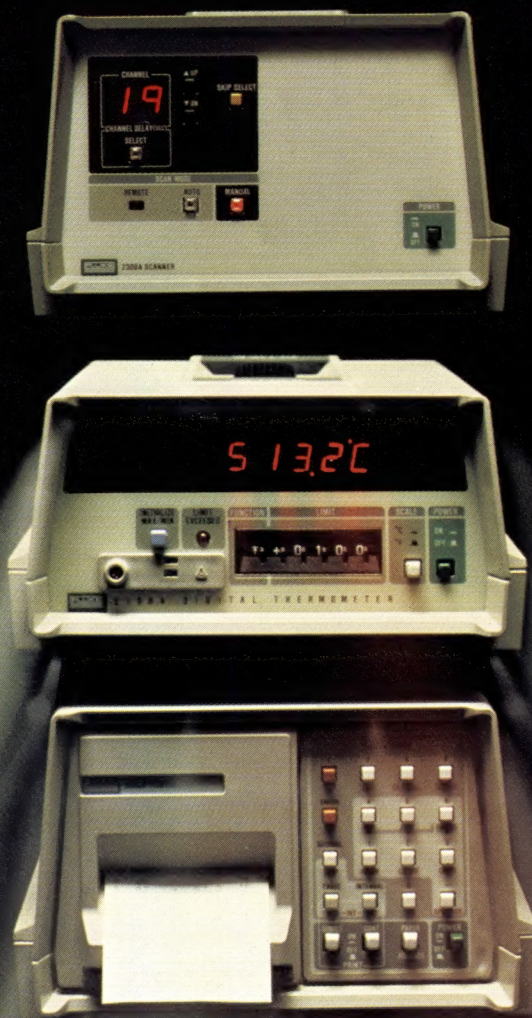

IN THE U.S. AND NON-EUROPEAN COUNTRIES:  
John Fluke Mfg. Co., Inc.  
P.O. Box 43210 MS #2B  
Mountlake Terrace, WA 98043  
(206) 774-2481, Telex: 152662

IN EUROPE:  
Fluke (Holland) B.V.  
P.O. Box 5053, 5004 EB  
Tilburg, The Netherlands  
(013) 673 973, Telex: 52237

I'm convinced. Now convince my boss.

- ☐ Send literature on the 2300A logging system.  
☐ Show us. Arrange a demo.

Name \_\_\_\_\_  
Title \_\_\_\_\_ Mail Stop \_\_\_\_\_  
Company \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_  
Telephone ( ) \_\_\_\_\_ Ext. \_\_\_\_\_

For technical data circle no. 1



It gets tougher all the time. Trying to match budget dollars with instrument performance can be a real problem. Unless the instrument is our Model 1062 Sweeper.

At only \$890\*, the Model 1062 is a full-performance laboratory sweeper with a 1-400 MHz frequency range. You can sweep any portion of that range at variable rates, and have triggering capability to boot. You'll also find

10 mW RF output, 2% sweep linearity, and  $\pm 0.25$  dB flatness—performance characteristics usually seen only on much more expensive instruments.

The Model 1062 also includes provision for an optional crystal-controlled birdy bypass marker system. Up to six plug-in marker modules may be added. The markers can be at single discrete frequencies or they can be harmonically related. Front-panel

controls vary marker amplitude and bandwidth.

Get the sweeper that solves budget and performance problems all at once. Get the Model 1062—still only \$890\*.

Wavetek Indiana, P.O. Box 190, 66 North First Ave., Beech Grove, IN 46107. Toll free 800-428-4424; in Indiana (317) 783-3221.

TWX (810) 341-3226

# WAVETEK®

\*U.S. price only For demonstration, Circle no 70  
For literature, Circle no 71

## Get rid of sweeper budget problems.



## Get our budget sweeper.




Just a flutter of  
pressure...



...and **snap**

Less than 2 grams of force actuates this Cherry snap-action miniature switch. Outside, a 2 $\frac{3}{8}$ " long aluminum lever provides unusually low operating force. Inside, an extra internal actuator reduces operating force even more while maintaining solid contact pressure for reliable performance.

Our unique light force miniature design is available with other external levers offering operating forces ranging from 3.5 to 15 grams...rated 3 amps, 125VAC. Gold crosspoint contact versions bring this same, dependable switching to your low energy (0.1 amp) solid state circuits. Or, choose higher electrical ratings of 5, 10 or 15 amps with increased...but still low...operating forces.

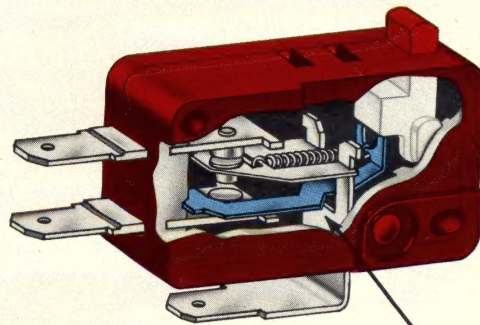

**EXTRA INTERNAL ACTUATOR**  
reduces force required at button plunger while  
maintaining solid contact pressure.

See us at  
Electro Boston  
May 13-15  
Cherry Booth  
2222-2228




## MINIATURE LIGHT FORCE SWITCHES

**CHERRY ELECTRICAL PRODUCTS CORP.** 3622 Sunset Avenue, Waukegan, IL 60085—312/689-7700—TWX 910/235-1572  
Our worldwide affiliates and phone numbers: Cherry Semiconductor Corp., Cranston, RI, U.S.A., 401 463 6000 • Cherry Mikroschalter GmbH, Auerbach, Germany, 09 643 181 • Cherry Electrical Products Ltd., Sandridge (Herts) England, 44 727 32231 • Chervo Brasil Industria E Comercio Ltda., Sao Paulo, Brazil, 011 246 4343 • Hirose Cherry Precision Co., Ltd., Kawasaki, Japan, 044 933 3511


For more information, Circle No 2

EDN APRIL 20, 1980



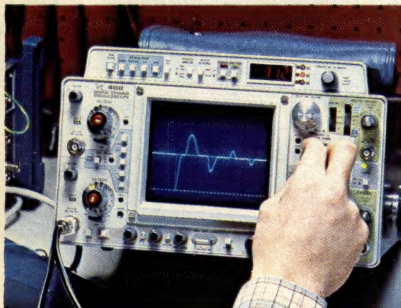

Newest lab scopes provide expanded price, performance alternatives (pg 71).

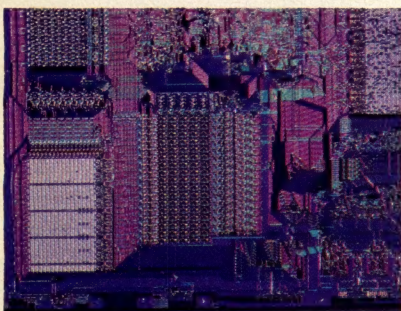

Electro/80 focuses on gate arrays,  $\mu$ C peripherals and instrumentation (pg 116).



On the cover: Yesterday's blue-sky devices, such as the Am9512 1-chip floating-point processor, are today's down-to-earth designs. Turn to pg 116 for more information. (Photo courtesy Advanced Micro Devices)

## DESIGN FEATURES

### Electro/80 — Leading the way to tomorrow's electronics . . . . . 116

As Boston braces for the first Electro of the '80s, the focus is on gate arrays,  $\mu$ Cs and their LSI peripherals, and  $\mu$ P-based instruments.

### Electro/80 products . . . . . 128

Review of noteworthy products slated for exhibition highlights some of the excitement in store for attendees in Boston.

### Universal active filters make designing a snap . . . . . 161

UAFs offer designers uninitiated in network theory the ability to construct complex filter configurations. Here's an example.

### Offset, linearization methods up transducer performance . . . . . 169

Simple circuits adjust and compensate for transducer operation under varied conditions — and handle low-level signals with care.

### Increase Z8000 power with floating-point routines . . . . . 179

A set of floating-point subroutines in 32-bit binary format provides the Z8000 with fast arithmetic operations.

### Lick power-supply heat with good thermal management . . . . . 191

It's better to prevent problems than be forced to solve them. This method quantifies heat rise to help forestall thermal woes.

### Asynchronous sampling simplifies dual-port memories . . . . . 201

By increasing memory access speed, a multiport memory overcomes arbitration and synchronization constraints.

### Circuit-design approach improves transistor reliability . . . . . 209

Designs based on the Ebers-Moll model yield reduced power dissipation and lower circuit voltage through proper use of device transconductance.

### Article Index, July-December 1979 . . . . . 217

Electronics is changing more and more rapidly, so we recommend that you scan this list for articles that you might have missed.

### DESIGN IDEAS . . . . . 229

## TECHNOLOGY NEWS

### Dot/bar-display-driver ICs aid analog-meter replacement . . . . . 45

Readers confirm dense-pc-board failures, report additional leakage, shorts problems (pg 63) . . . Laboratory-oscilloscope choices grow as makers expand cost, performance options (pg 71).

## NEW PRODUCTS

### Editor's Choice . . . . . 87

6809- $\mu$ P evaluation kit serves designers, technicians . . . Programmable function generator features high intelligence . . . Self-calibrating RF power meter easily measures insertion loss/gain.

### Feature Products . . . . . 241

Monolithic music makers croon lullabies, sound alarms . . . Ultraminature liquid electrolytics sport high electrostatic capacitance . . . Low-cost dot-matrix printer delivers high-quality output.

### Computer-System Subassemblies . . . 254

### Computers & Peripherals . . . 262 Instrumentation & Power Sources . . . 272

### Components & Packaging . . . 290 ICs & Semiconductors . . . 312

## DEPARTMENTS

### News Breaks . . . 15

### Signals and Noise . . . 29

### Books . . . 36

### The Editor's Column . . . 39

### Editorial Staff . . . 40

### Leadtime Index . . . 84

### $\mu$ Computerist Corner . . . 97

### Business Staff . . . 254

### Literature . . . 319

### Career Opportunities . . . 328

### Advertisers Index . . . 337

### Looking Ahead . . . 338





# HP announces a way to accelerate microcomputer development...



HP—When you depend on logic




# and put the brakes on development costs.

The new HP 64000 Logic Development System helps you speed microcomputer development and cut costs several ways. First, it uses a universal, rather than a dedicated, approach to microcomputer development. So you can use the HP 64000 to develop an 8080-based system today, and then a 6800-based system tomorrow. Or you can use it for different types of microprocessors in the same product, without paying the price of separate development systems for each. What's more, HP's powerful 64000 architecture is independent of processor type, bus-width or speed. So you'll be able to use this same basic system with future developments such as 16- and 32-bit processors.

## **Teamwork means faster system development.**


Second, the HP 64000 can help shorten development schedules through efficient teamwork. HP's shared peripherals approach means that a number of operators share a common disc. This common data base serves up to six development stations. A powerful file manager encourages teamwork. Each user can work with his own copies of files, while a master set is maintained separately. Now, several programmers can work at the same time. Or designers can perform emulation, while programmers debug software.

The disc's high speed means each user is independent of, and essentially transparent to, every other. And all users have immediate access to the latest software for more efficient operation.

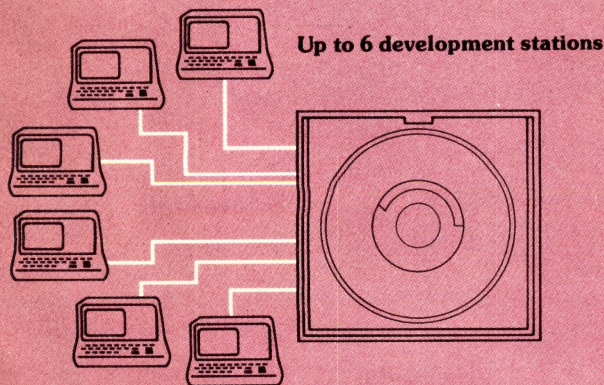

This HP approach is superior to a single-station, dedicated system for two other important reasons: With today's growing emphasis on microprocessor-based

products, it's unlikely that any single system will provide the flexibility and growth path you'll need in future years. What's more, the 64000 offers significant savings when multiple development stations are contemplated (see chart below), and provides a practical way for you to obtain high-performance peripherals.

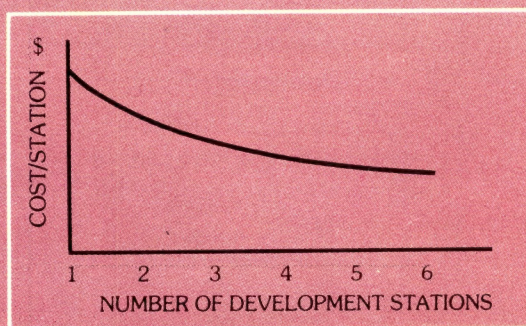

## **An accelerated path to market.**

Third, because the HP 64000 has a powerful user-oriented display editor, rather than a teletype editor, it becomes a user-oriented system that speeds editing and debugging. Its advanced real-time emulation shows you precisely how your system will perform at speed, to help eliminate potential production problems and product entry delays.

In short, the HP 64000 (\$18,500\* for a minimum operating system) provides a way for you to optimize the efficiency of your development team, plan for the future, and expand development capabilities. Because the system is backed by Hewlett-Packard, you also enjoy the benefit of on-site service during the initial 90-day warranty period. Then, if you wish, you can get a complete HP service contract tailored to your needs that can also include on-site service.

To get complete details, write to Hewlett-Packard, 1507 Page Mill Road, Palo Alto, CA 94304. Or call the HP regional office nearest you: East (201) 265-5000, West (213) 970-7500, Midwest (312) 255-9800, South (404) 955-1500, Canada (416) 678-9430.

\*Domestic U.S.A. price only




# HEWLETT PACKARD

For more information, Circle No 3



**Tektronix**  
**OEM**  
**Products**

# No matte Tektronix

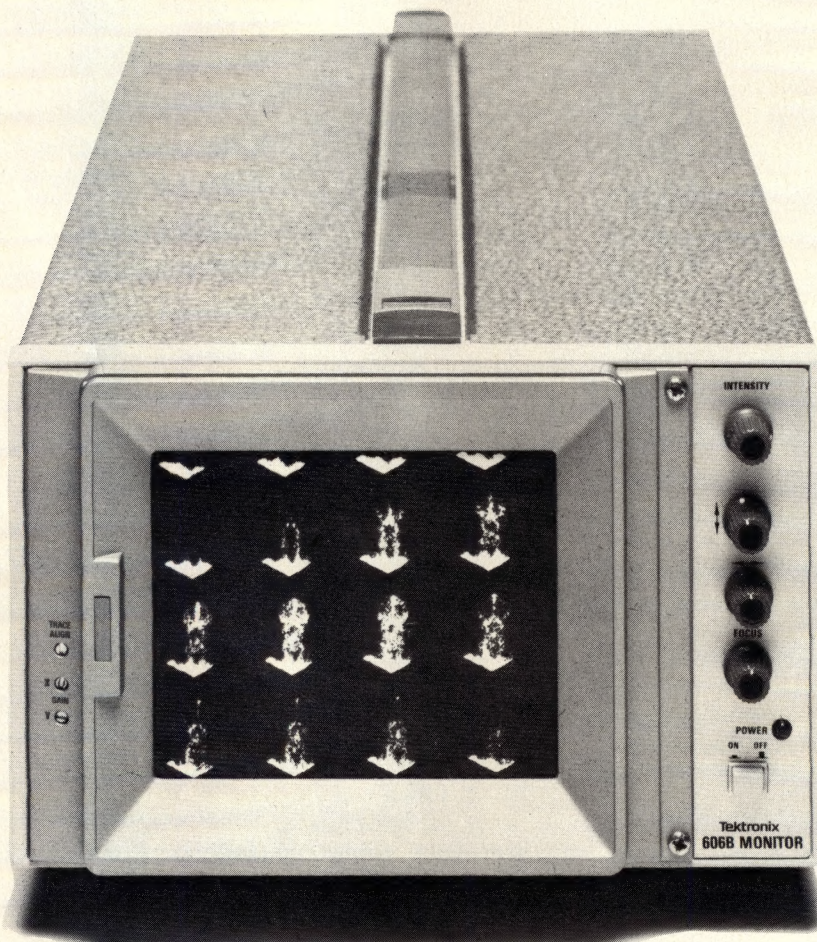


**606B** Very high resolution display for photographic recording applications in medical multi-imaging, for electron microscopy, radiation and thermal scanning systems, and for alphanumeric and graphic displays<sup>1</sup>.


## Look to the leader:

As the leader in quality OEM displays, we know your needs and we can meet them with the greatest variety of display products in the business. We know that you expect our displays and cameras to do the job they're specified for — day after day.


You expect us to offer you the most competitive price/performance packages. To work closely with you to help solve your interface requirements. To support you totally, before and after purchase. To grow as you grow, so we can both meet the

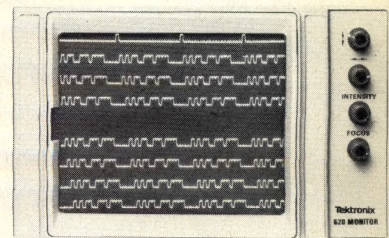

**620** For logic analyzer, A-scan ultrasound, optical electronics, and mechanical measurement applications.

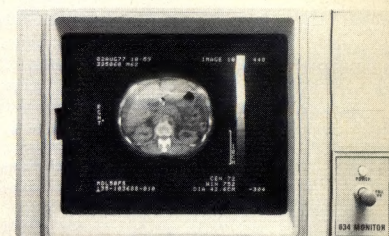

**634** For ultrasound, computerized tomography, video multi-imaging, ECM and other high-performance raster-scan applications.

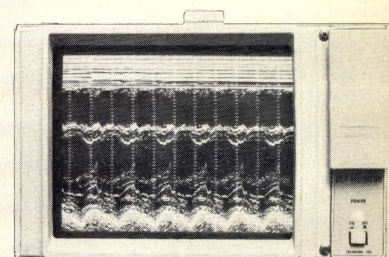

**624** For electronic test and measurement applications and for A, B, M-mode and real time ultrasound use.


new technologies, government regulations, and competitive pressures that impact our business. Meeting these expectations is what it's all about. And it's a commitment we honor. All the way.

<sup>1</sup>606A and 606B dot scans shown as accumulated on film.


<sup>2</sup>Image courtesy of Optical Electronics, Inc.




# where you look, looks best.

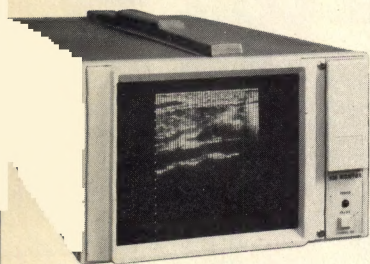


**608** A-Mode, B, M, and real time ultrasound, non-destructive test systems, and electronic test and measurement systems.

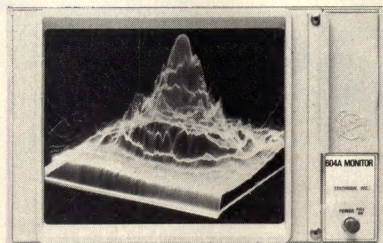


**604A** For electronic test and measurement applications and for use in mechanical measurement systems.<sup>2</sup>

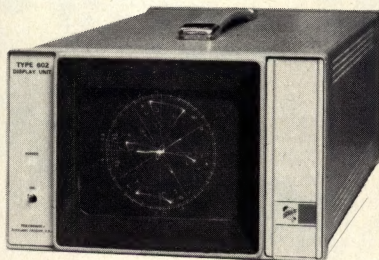


**602** Vector display for precise assessment of TV color encoding.

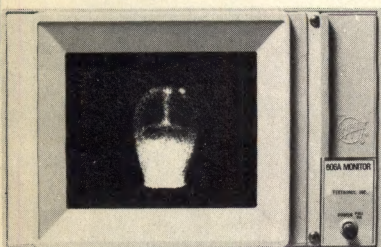


**606A** For nuclear multi-imaging, gamma camera imaging, and scanning Auger and electron microscopy.<sup>1</sup>

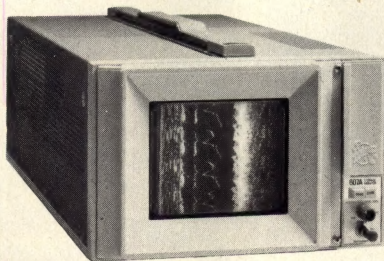


**607A** Variable persistence storage for medical diagnostics and electronic equipment like gamma camera, radar/sonar, and spectrum analyzers.

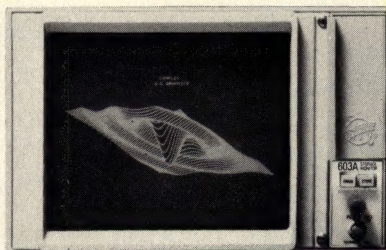

**603A** Bistable storage for uses like ECM, seismic analysis, mechanical shock, and strain gauge measurement.



**C-28** For high quality crt recording applications, including ultrasound and gamma camera imaging.



**C-5C** For low-cost, general purpose photographic applications.

## See for yourself.

Our broad product offering is just the beginning: ten small-screen displays, two cameras, a wide range of options including U.L. 544 Listing and Component Recognition and modular packaging, plus a broad selection of large-screen displays.

For technical data circle no 257 on reader service card.

Add applications assistance, full service, and support programs for a truly profitable working relationship. Contact us now to find out more about how Tektronix OEM Display Products can meet your needs.

For demonstration circle no 258 on reader service card.

For the address of your nearest Tektronix Field Office, contact:

P.O. Box 1700  
Beaverton, Oregon 97075  
(503) 644-0161  
Telex: 910-467-8708  
Cable: TEKTRONIX

Europe, Africa,  
Middle East:  
Postbox 827  
1180 AV Amstelveen  
The Netherlands

Asia, Pacific, Americas:  
Export Marketing  
P.O. Box 500  
Beaverton, Oregon 97077  
U.S.A.

Designed to meet  
your demands.  
Built to fit  
your design.

**Tektronix**  
COMMITTED TO EXCELLENCE

For immediate action, dial our  
toll free automatic answering  
service 1-800-547-1512.



# **Methode's** **offers more tooling** **options & lowest total cost!**



**JAGUAR I.D.C. CONNECTORS**



**TERMINATOR JT-10 FULLY AUTOMATIC  
DUAL END ... RANDOM LENGTH**




**TERMINATOR  
HAND TOOLS**



**TERMINATOR JT-1  
HARNESS MAKER**



**TERMINATOR JT-5  
FULLY AUTOMATIC**

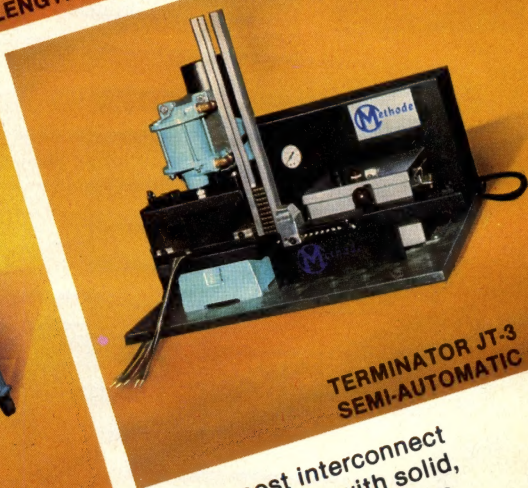

**TERMINATOR JT-3  
SEMI-AUTOMATIC**

Our Jaguar **\*MULTIPLE TERMINATION SYSTEM** is a complete wire-to-post interconnect system on .100" and .156" centers that accomodates discrete wire or ribbon cable with solid, stranded or fused-stranded conductors. This reliable insulation displacement system eliminates wire stripping, crimping and stuffing ... and, features buy or lease application tooling for very small or very large runs up to 24,000 connections per hour. We'll even customize tooling to meet your exact needs. Just circle the reader service number to receive our fully illustrated Jaguar system catalog.



**Methode Electronics, Inc.**  
 INTERCONNECT PRODUCTS DIVISION  
 1700 Hicks Road  
 Rolling Meadows, IL 60008  
 (312) 392-3500 TWX: 910-687-0760




**NEW**



# 1-SHOT IDC HARNESS TERMINATOR

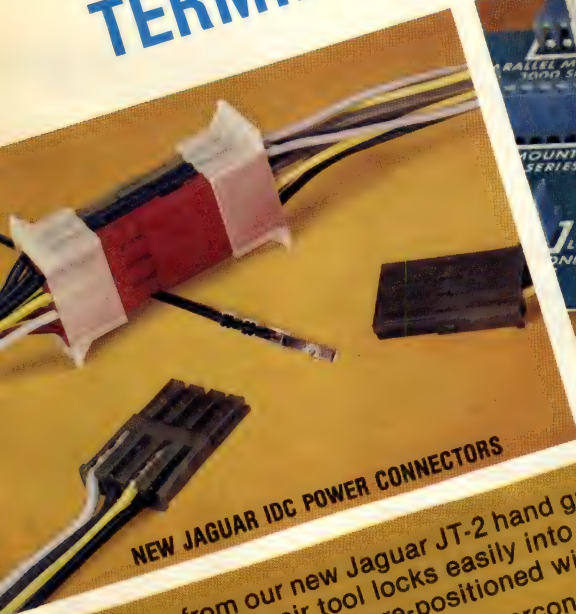

**NEW JAGUAR IDC POWER CONNECTORS**

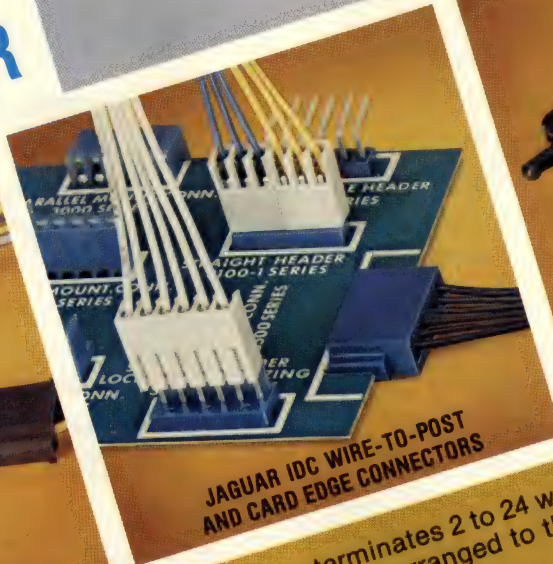

**JAGUAR IDC WIRE-TO-POST  
AND CARD EDGE CONNECTORS**



**JT-2 HAND GUN**

One shot from our new Jaguar JT-2 hand gun automatically terminates 2 to 24 wires for super-fast harness construction. The air tool locks easily into IDC connector fixtures arranged to the harness shape . . . then trims and terminates the pre-positioned wires.

This latest addition to our Jaguar interconnect system eliminates wire stripping, crimping and stuffing on small or large runs.

The Jaguar system now has power connector and card edge configurations to provide mass termination IDC for all applications.

Just circle the reader service number for details.



**Methode Electronics, Inc.**  
INTERCONNECT PRODUCTS DIVISION  
1790 Hicks Road  
Rolling Meadows, IL 60008  
(312) 392-3500 TWX: 910-687-0760



For more information, Circle No 4





**Choose the Minifloppy that's best for your system.** The original SA400 Minifloppy or the double-sided SA450 Minifloppy. Both are a compact 3.25" x 5.75" x 8.00", and weigh only three pounds. Both use proprietary glass bonded ferrite/ceramic heads developed and manufactured by Shugart. Both deliver proven reliability without preventive maintenance and offer excellent data integrity. And both give you excellent price/performance. Shugart backs these drives with more service, support, and production capability than anyone in the business. Which Minifloppy is the best choice for your application?

# There are only to get


**Doubling the Minifloppy.** The SA450 double-sided Minifloppy is the perfect upgrade for system builders who need more cost effective data storage capacity. Identical in size, and I/O compatible with our single-sided SA400 Minifloppy, the SA450 doubles unformatted capacity to 437.5 kilobytes (double density). In addition, the SA450 uses Shugart's new Bi-Compliant™ head assembly, which provides excellent compliance, resulting in superior data reliability. This new head design also delivers longer head and media life.

Shugart's industry standard format lets you read and write data on any single or double-sided mini-diskette, too. This means your customers can continue to use their existing disk library. So look to the SA450 as your competitive answer for any system where you want to double the capacity of a single-sided Minifloppy without doubling your data storage space requirements and cost.






**The original Minifloppy.** The SA400 single-sided Minifloppy is the most popular 5¼-inch disk drive available. Since we invented the Minifloppy in 1976, over half a million have been delivered to builders of microprocessor-based systems, personal computers, and word processing systems. The Minifloppy offers the lowest unit cost of any Shugart drive, yet it stores up to 218.8 kilobytes (unformatted, double density) in a reliable, compact package. It uses the same proprietary head and recording technology as our single-sided 8-inch floppy drive. A servo-controlled DC drive motor eliminates AC power requirements and the simplified actuator with direct drive spiral cam provides more reliable track-to-track access. Low heat dissipation, positive media insertion, write protect, and an activity light are standard. And only Shugart has the production capability to meet your needs.

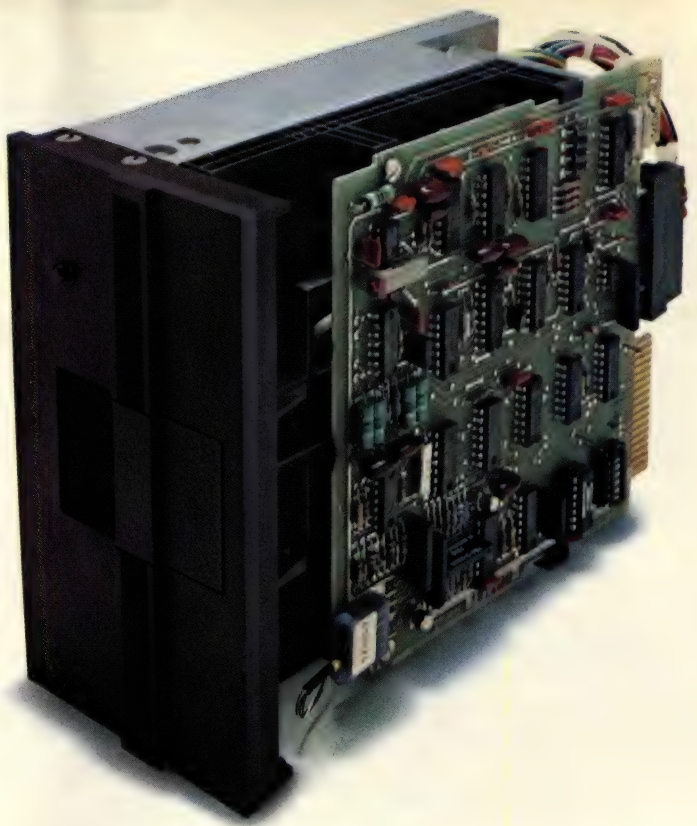

# two ways a Minifloppy.™

**Choose the Headstrong Minifloppy disk drives.** No matter which of our Minifloppy disk drives you select, you get the competitive edge when you go with Shugart. We are Headstrong about helping to keep you competitive too, with high volume deliveries of drives that offer superior reliability, quality, and value. This Shugart commitment is also backed by all the support you need including helpful technical services, in-depth documentation, and design assistance. And when your product line grows, we'll be there with a complete family of floppy, Minifloppy, and fixed disk drives in a full range of capacities. Reliable products, volume delivery, superior quality, and value. That's what we're Headstrong about at Shugart. □ **Shugart Associates:**

**435 Oakmead Parkway, Sunnyvale, CA**  
**(408) 733-0100** Sales & Service: Sunnyvale, CA; Costa Mesa, CA; Minneapolis, MN; Richardson, TX; Waltham, MA; Landing, NJ; Atlanta, GA; Toronto, Ontario; Paris, France; Munich, Germany. □ Shugart products are also available off the shelf from local Hamilton/Avnet outlets.

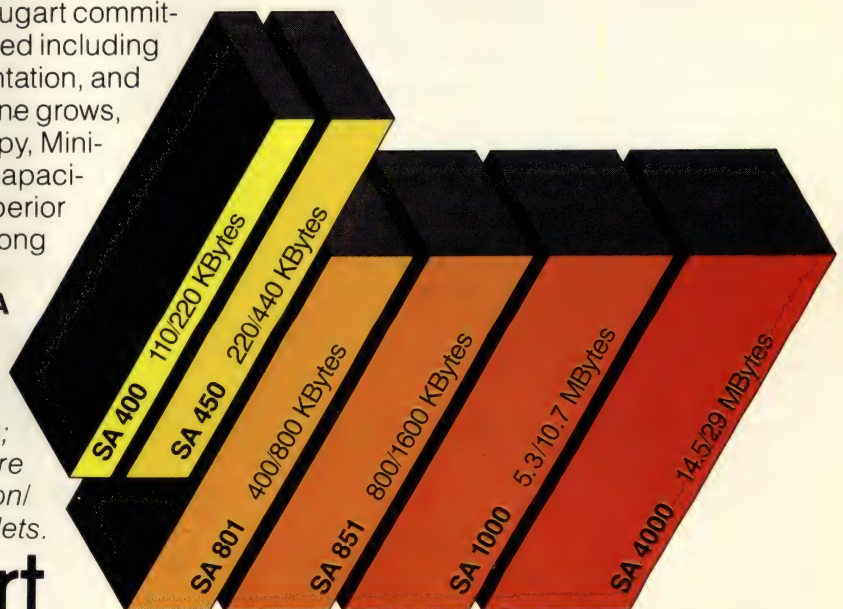

**Shugart**  
**The Headstrong Family**

For more information, Circle No 5



# Your low cost way out of the impedance jungle.



Before they get on board,  
fend off wild RCL components for \$795 (usa).



Those untamed components. They swarm over your circuit boards, eat into your re-sources, trap you in the impedance jungle.

But there is a low cost, reliable way out. Armed with the Model 252, you breeze through a wide range of values for resistance (R), capacitance (C), inductance (L) and conductance (G) at  $\pm 0.25\%$  accuracy. The push of a button gives you dissipation factor (D).

At \$795, the 252 rivals instruments costing twice as much.

- 0.25% basic accuracy
- Wide ranges (0.1 pF resolution to 200  $\mu$ F)
- 3 1/2-digit display (no manual balance)
- Dual analog outputs (C or L with D)
- External bias (to 50 VDC)
- Four measurements/second
- 4-terminal Kelvin Klips® (guarded)
- Input protection
- Easy calibration, servicing
- 1 kHz test frequency (120 Hz option)
- Low power design
- Lightweight, tiltstand handle

For systematic GO/NO-GO sorting, there's an optional limits comparator and sorting fixture.

Want autoranging? Gear up with the Model 253. And if you test at low frequency, check out the 120 Hz Model 254.

For over 25 years we've tamed the ways of the impedance jungle. A detailed 252 brochure shows you how.

The sure way  
to innovation.

**esi**  
ELECTRO  
SCIENTIFIC



# News Breaks

## **SPEAKING OF VOICE I/O . . .**

Talking in either a male or female voice, the MN6401 synthesizes as many as 63 words. Matsushita Electric's (Osaka, Japan) chip permits selection of either 10 sec of high-quality voice output or up to 30 sec of the device's lowest quality speech.

The synthesizer employs the partial autocorrelation technique (originally developed by Nippon Telephone and Telegraph Corp), which processes stored digital signals in a manner approximating the human voice. Matsushita's 28-pin device performs the same job as the 3-chip set previously introduced by other Japanese firms, but it requires +5V rather than -10V.

. . . A vocal warning conveys an urgency that a flashing light or LCD lacks. At least that's the rationale that will lead major car manufacturers to replace conventional warning indicators with synthesized voices sometime within the next 4 yrs. Top-of-the-line models will be the first to complain when the oil pressure gets too low or the brakes need adjustment, but lower cost models will quickly follow suit.

According to a Chrysler Corp spokesman, though, the language barrier must be bridged before such voice units become commonplace. Thus, first-generation cars will probably combine a vocal message with a flashing light bearing an international symbol picturing the difficulty or failure.

A similar problem — operator confusion — hampers military efforts to employ voice display in aircraft. The units might be too efficient: Airborne-equipment manufacturers are so quick to capitalize on voice-synthesis technology that crew members run the real risk of having an entire cockpit of instruments telling their stories at once. Therefore, current research is examining efficient ways to arbitrate the potential chaos.

. . . Far more has been written and said about synthesizing voice with a computer than recognizing human speech with a computer. Recognition is, however, the more difficult task. If you want to learn about the practical ramifications of talking to computers, study the theories underlying current recognizers and get hands-on experience with the latest equipment, attend a short course, "Computer Recognition of Speech," in Silver Spring, MD on May 1 and 2. You can get more information on the course by calling Speech Science Publications at (805) 683-1323.—ET

## **TOP-TO-BOTTOM $\mu$ P INTROS INCLUDE DEVICE WITH ON-CHIP BASIC**

Look for a low-end single-chip  $\mu$ C with ROM-resident BASIC (NIBL) interpreter from National Semiconductor (Santa Clara, CA) in about 2 months. Designated the INS8073, the device will be part of the firm's 8070 family and will incorporate 64 bytes of RAM and 2.5k bytes of ROM.

The introduction is part of the firm's top-to-bottom assault on the  $\mu$ P market, which will also include introduction of an advanced 8048-type single-chip  $\mu$ C and a dedicated low-end  $\mu$ P with a standard CPU "engine" configurable to specific application areas. Also expect to see an evaluation board for National's NSC800 CMOS 8-bit  $\mu$ P by early summer.—JB

## **LAMINATE UPS PRODUCTIVITY, REDUCES PC-BOARD PROCESSING COSTS**

General Electric (Coshocton, OH) expects its Engineered FR 4 epoxy/glass laminate to cut pc-board costs by decreasing the number of reject parts. The product incorporates an epoxy adhesion promoter or "bridging agent" that improves epoxy-to-epoxy bonds. It also allows GE to reduce board glass content to 46% of its current value; the resulting 20%-extended drill-bit life, coupled with less heat generated during drilling with the new laminate, improves



# News Breaks

productivity by reducing rejected boards caused by delamination (from excessive heat), through-hole irregularities (from dull drills) and resin smear. For more on the subject of pc-board failures, turn to pg 63.—JT

## **μP DEVELOPMENT SOFTWARE RUNS ON DESKTOP COMPUTERS**

Software-development packages for 8080/8085, 6800 and Z80 μPs have been added to Hewlett-Packard's (Palo Alto, CA) application-software library for its Series 9800 System 35 and 45 desktop computers. Each package costs \$2500, with the combination of all three specially priced at \$3000. Development software for each μP type, contained on one data cartridge, includes initialization, editors, assemblers and console programs, along with special-function-key overlays and instructions.—AS

## **DMOS FET FAMILY PICKS UP A SECOND SOURCE**

Semi Processes Inc (Santa Clara, CA) has signed a second-source agreement with Signetics Corp (Sunnyvale, CA) to manufacture and sell high-speed DMOS FETs. The agreement covers the SD5000 quad and SD210 Series single-analog-switch families and the SD305 and 306 dual-gate RF amplifiers and mixers. Additionally, SPI will develop new DMOS products for the two companies under the direction of Dr Jean Hoerni, inventor of the planar process and member of SPI's board of directors.—WT

## **COMMON-SENSE SOFTWARE TOOLS OUTFIT THE 6809 FOR THE REAL WORLD**

Completely position-independent code is just one of the functionality benefits offered by Motorola's (Phoenix, AZ) BASIC-M. The compiler combines the best features of all available software packages, such as user-definable multiline procedures from PASCAL, and provides powerful application-programming capabilities. And to make programming even easier, the firm has also introduced SUPERBUG, a heavily evolved version of MIKBUG that suits 6809 boards. This software package includes utility routines that link to BASIC-M programs.—ET

## **CONFERENCE WILL UPDATE OPTICAL-COMMUNICATIONS APPS, MARKETS**

Hurry if you plan to attend the Outlook for Optical Communications conference in Andover, MA, scheduled for April 27 through 29. The convention will present and discuss the approaches required to design and market fiber-optic communications products and systems employing currently available components and will explore the status of rapidly evolving industrial-technology standards and applications. For registration information, contact Richard Murray at (617) 267-9425.—TO

## **FIBER-OPTIC-LINK KIT'S PRICE SLASHED BY MORE THAN 50%**

To make it more attractive for design engineers to investigate the advantages of using fiber optics, Hewlett-Packard Co (Palo Alto, CA) will reduce the price of its HFBR-0010 simplex fiber-optic-link kit from \$570 to \$275. Ready to hook up, the kit consists of transmitter and receiver modules, a 10m cable/connector assembly and complete technical literature. The modules accommodate data in any format at rates from dc to 10M baud and offer TTL compatibility.—TO

## **AT-HOME LEARNING COURSES PROVIDE HANDS-ON INSTRUCTION**


Electronic Technology Series self-instructional courses from Heath/Zenith Educational Systems Div (Benton Harbor, MI) include text material (typically less than 300 pgs), programmed instruction sequences, audiovisual materials, self-checking quizzes, practical experiments (components supplied) and a money-back guarantee. Four study subjects are now available: operational amplifiers (\$39.95), active filters (\$29.95), IC timers (\$39.95) and phase-locked loops (\$49.95). For more information, phone (616) 982-3210.




# MORE PULL in a smaller package?




## Check these curves.



T-4 (3/8" long) Intermittent duty

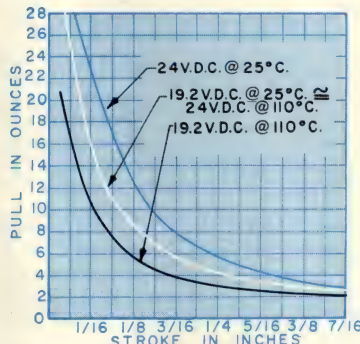

T-8 (1" long) Continuous Duty

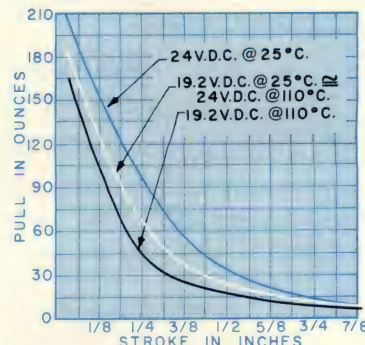

T-12 (1 1/2" long) Intermittent Duty

**Ounce-for ounce, inch-for-inch Guardian Tubular Solenoids pack more power...** because our tubular designs assure total magnetic field enclosure and result in efficient, powerful operation. More efficient than other DC solenoids. They give you more power in less space, plus U/L and CSA recognition.

### Easy to design-in. Easy to install. By design.

Guardian Tubulars work in any position. Close tolerance between plunger and bobbin means no possibility of double seating. So they work in your product just the way you want them to work.

Mount them directly into panel by inserting threaded bushing thru installation hole and tightening nut on lock washer. Or, mount with standard bracket.

Either way, Guardian Tubulars install without damage to the solenoid. Look how the



notched tube-steel shell mates with notched end plate. Result? A stronger assembly that takes more torque when installing... with no chance of damage. The leads emerge thru a notch in the steel shell, so they *will* not, *can* not be sheared by rotation during installation.

**Once you put a Guardian Tubular in your product... forget it.** Typical mechanical life is 20 million. That's probably longer than your product's life expectancy... due primarily to the unique Valox® 420 molded bobbin.

**Variations and specials? Guardian's got 'em.** Any DC voltage from 6 to 240. Push type or pull type operation. Return springs, silencers, termination variations, special mountings... you name it and we'll deliver it with the high quality craftsmanship and low prices that have made Guardian Number 1 in Solenoids—and that keeps us here on top.

**Let the Guardian Angel reveal all the pull charts and curves in full size.** Send for your free copy of our 72 page catalog.



This mark indicates recognition under the component program of Underwriters Laboratories, Inc.



# GUARDIAN®

For instant information  
call 800/621-3348

GUARDIAN ELECTRIC MANUFACTURING CO. 1550 West Carroll Avenue—Chicago, Illinois 60607 • 312/243-1100

For more information, Circle No 7



# News Breaks

Zilog (Cupertino, CA) also departs from traditional methods of customer education by offering a 5-part Z8000 study-at-home correspondence course. It's intended for designers with a good  $\mu$ P-technology background, with five lessons covering Z8000 architecture, memory-management techniques, interfacing memory and peripherals, handling of interrupts and traps, and use of the Z8000 instruction set. Each lesson contains a 10-question quiz that is graded and returned with a critique of your answers. The course and all required study material cost \$39. To enroll, phone Kathy Trappen at (408) 446-4666.—WP, JM

## **PC-BOARD STANDARDS UPDATE INCLUDES DATA ON "MEASLES"**

Recent discussion of pc-board failure modes (see pg 63) might make the IPC Guidelines For Acceptability of Printed Boards (IPC-A-600C) even more valuable — especially because this latest version contains new information on measles, an internal condition in boards' laminated base material in which the glass fibers separate from the resin at the weave intersection.

The document (\$5 to members, \$8 to nonmembers) contains photographs that visually standardize individual interpretations to specs on pc boards, plus acceptability criteria for single- and double-sided and multilayer printed boards, flexible circuits and flat cable. You also get descriptions of the various test methods the IPC recommends. For more information, contact the IPC at 3451 Church St, Evanston, IL 60203, or phone (312) 677-2850.—JB

## **50-MHz DELAYED-SWEEP SCOPE SELLS FOR \$1745**

The latest entrant into the lab-scope sales sweepstakes is Hitachi Denshi Ltd's (Woodbury, NY — phone (516) 921-7200) 50-MHz delayed-sweep unit, which includes probes. The rest of the Japanese-import line consists of 15- and 30-MHz single- and dual-trace units priced from \$545 to \$945. The 50-MHz instrument features 5-mV/div sensitivity, trigger view and automatic trigger.—AS

## **FIBER-OPTIC TRANSMITTER STRETCHES LINES TO 1000m**

The HFBR-1002 fiber-optic transmitter can send signals 1000m — 10 times farther than Hewlett-Packard's previous MFBR-1001 unit equipped with the same -2001 receiver and -3000 Series cable/connector assemblies. The \$235 (100) unit is pin compatible with the earlier device and can handle data rates from dc to 10M baud. The cables are available in any user-specified length, not in just five discrete lengths to 100m, as noted in the Palo Alto, CA company's current catalog.—AS

## **COMING ATTRACTIONS . . .**

Attendance at the Microprocessor Design or Microprocessor Design Lab Operations workshops is a prerequisite for enrollment in Tektronix's Microprocessor Project Development course, to be held on April 21 through 25 in Santa Clara, CA and May 19 through 23 in Chicago, IL. The \$600 hardware-oriented course focuses on the operation of devices commonly employed in  $\mu$ P hardware design and on the equipment and techniques available for fast and convenient software/hardware integration. Call (503) 644-0161 collect for more information . . . An intensive 4-day course on VLSI technology will be held at American University, Washington, DC, on June 3 through 6. Coverage will encompass both fabrication fundamentals and applications of VLSI circuits, with emphasis on digital signal processing for the '80s. Certificates of Completion and Continuing Education Units will be awarded to those participants who complete the \$525 course. Phone Jennifer Murphy at (202) 686-2697 for all the details . . . A \$750 seminar, entitled "PASCAL Programming for Mini and Microcomputers," covers a general approach to the use of high-level languages in small computers, including an intensive course in PASCAL programming, a preview of ADA (the evolving Department of Defense standard real-time language) and an introduction to




# NATIONAL ANTHEM

SEMICONDUCTOR NEWS FROM THE PRACTICAL WIZARDS OF SILICON VALLEY.

## Developing Microprocessors

STARPLEX™ WITH ISE™ THE FULLY DEVELOPED DEVELOPMENT SYSTEM.

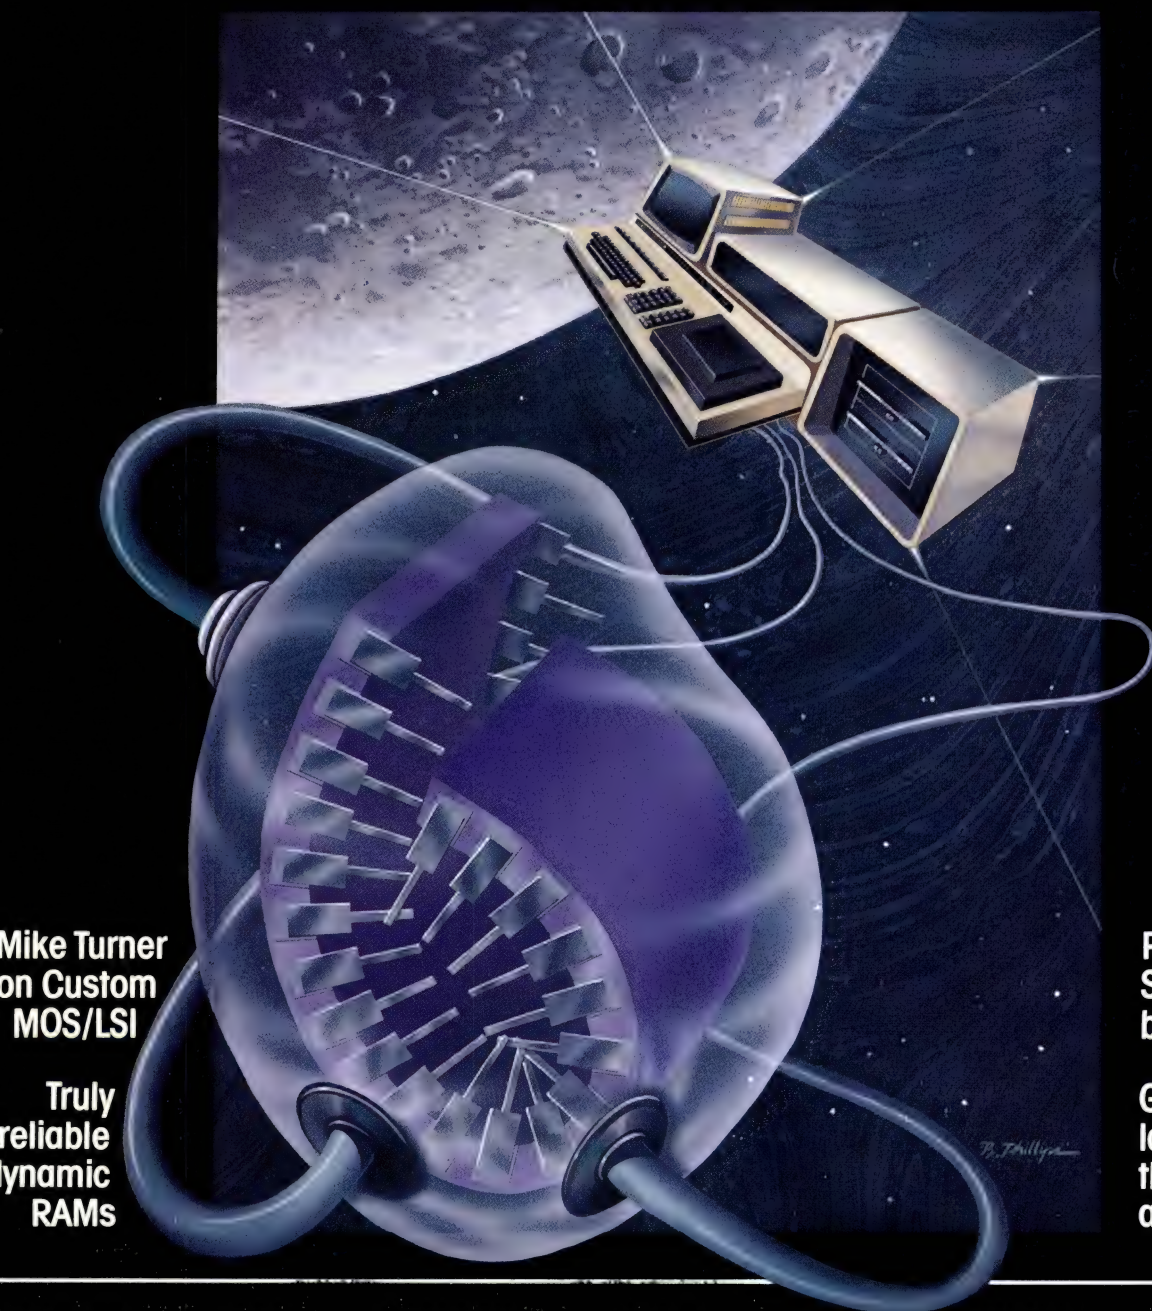

Mike Turner  
on Custom  
MOS/LSI

Truly  
reliable  
dynamic  
RAMs

Practical  
Series/80  
boards

Get the  
latest from  
the National  
archives

Acquisition   Logic   Transistors   Hybrids   Linear   Interface   Bubble Mem  
RAMs/ROMs/PROMs   Transducers   Displays   Custom Circuits   Optoelectronics  
Microprocessors   Microcomputers   Modules



## Nationally improved memories.

### A unique combination of design and manufacturing techniques results in a truly reliable family of 16K dynamic RAMs.

With their exclusive combination of design and manufacturing procedures, National's MM5290 Family of 16K dynamic RAMs is setting new industry standards for reliability.

The readily available MM5290 Family is designed so that soft errors induced by stray alpha particles are virtually eliminated.

Furthermore, National has extensive component test procedures, which include pre-burn-in, monitored burn-in, final test, and Quality Assurance checks.

The combined effect, of course, is unsurpassed operational accuracy and dependability in every 16K dynamic RAM shipment.

### The first and only MST.™

In addition to National's use of conventional final testing and QA component level processing, many customers request National's unique MST (Memory Systems Test). MST eliminates or greatly reduces the

customer's own requirements for internal testing. So their incoming test, board test and system rework costs are substantially reduced.

The MST system duplicates the test flow of a sophisticated systems manufacturer. Using an actual nine-megabyte card level system to perform the testing, the dynamic RAMs are burned in at elevated ambient temperatures and at stress voltage levels.

The MST program then applies multiple test patterns, power supply margin tests, real-time error logging, and hours of continuous testing over the operating temperature range in the nine megabyte system.

All of which serve to screen out board and system level rejects. The kind of rejects that are impossible to detect using component level tests that only take seconds to perform.

For more detailed information about MST and the MM5290 Family — plus a Reliability News Brief on alpha particle test results — be sure to check the National archives coupon below.

### Quality RAMs from a quality source.


National has, of course, been known as a quality production house for a long time. MST now provides 16K RAMs that are first in quality and reliability.

And thanks to National's commitment to manufacturing excellence, MST quality in 16K RAMs is available now in production volumes. National has been preparing MST for three years and now offers it on-line to increase your level of quality and lower your overall costs.

So when your design calls for dynamic RAMs, think of the Practical Wizards at National Semiconductor.

After all, if you don't deserve the best, who does?

MST is a trademark of National Semiconductor Corporation.





# STARPLEX™ aids microprocessor development.

**For the first time, real-time 8048 Family emulation and debugging in a multiprocessor environment.**

With the STARPLEX system, National Semiconductor has created an easy-to-use development tool that helps design engineers complete their entire job in one place.

Using STARPLEX and National's 8048 Emulator Package, designers of 8048 Family systems get the kind of sophisticated tool needed for efficient microcomputer development. And with 8048 ISE™ (In-System Emulator), they get capabilities that up to now simply haven't been available in this type of instrument.

## What is ISE?

National's ISE is a separate STARPLEX module housing 32K bytes of real-time map memory, plus all the necessary logic for breakpoints, tracing, and memory mapping. These resources are available for the emulation of any processor, since the individual emulation packages are the only components dedicated to particular processors.

And since ISE doesn't share the STARPLEX BUS, the system doesn't have to compete for memory access with its STARPLEX host.

## ROM display and disassembling.

The 8048 emulator package provides capabilities which zero in on the problems of designing with single-chip microcomputers. The target card has its own 4K of RAM dedi-

cated to the real-time emulation of the processor's program ROM. So the designer has complete access to this memory throughout emulation.

He may examine and disassemble existing ROM contents, make changes, and

execute the altered code. This gives him considerable flexibility in new product design, as well as in debugging existing systems containing a previously masked 8048.

## There's more to STARPLEX beneath the ISE.

National's easily-learned software comes completely integrated into the STARPLEX system, including an automatic testing mode called "In-File" that will implement a pre-defined sequence of tests. And ISE can also record those results, so you can see exactly how each part of the system operates during testing.


STARPLEX's symbolic debugging capability provides not only the usual breakpoint conditions, but also a "coast" command which allows you to continue executing a program after the breakpoint combination has been satisfied.

STARPLEX can not only develop and debug software for National's 8048 Family, but also for 8080, 8070, NSC800, 8085 and Z-80® microprocessors plus BLC/SBC Series 80 boards.

When you get right down to it, National's STARPLEX with ISE offers features not available in any other development system on the market today. Yet it costs substantially less to own and operate than any system currently being sold.

Practical Wizardry strikes again. 

STARPLEX and ISE are trademarks of National Semiconductor Corporation. Z-80 is a registered trademark of Zilog Corporation.

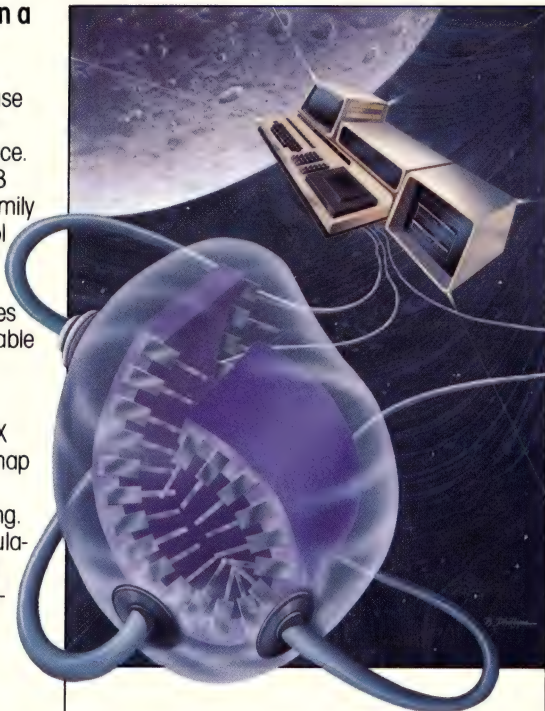

## Series/80 microcomputer products brought back down to earth.

**National doesn't just make over seventy-five Series/80 computer products. They make them practical with test points, options, functional design and availability.**

Some manufacturers build flashy boards loaded with far-out technology that you don't need and won't ever use. But not National. They make practical, reliable boards that do just what you buy them for.

And National makes more kinds of those practical, reliable Series/80 products than any other manufacturer.

The Series/80 Family is by no means just a second source supply. No other supplier


beats National's reliability, functionality of design, user options, or variety of products.

The Series/80 Family includes CPUs, memories, controllers, analog and digital I/O, peripheral controllers, firmware, card cages, power supplies, cables and just about anything you need for just about any application.

## Test procedures make them practically perfect.

National's boards are designed to be functional, easy to design in and totally consistent in operation. That's why test points have been designed into each board. So testing becomes an integral part of the design phase and continues throughout National's unique dynamic high temperature burn in.

To further ensure reliability, you also get a full one-year warranty with each Series/80 board that you buy from any of National's distributors worldwide. The longest warranty in the industry.

All from the Practical Wizards who finally brought space-age technology back down to earth. 





# "National is the only broad-based supplier of Custom MOS/LSI"

"There is only one supplier of Custom MOS/LSI components that has the design resources of a billion-dollar company behind it. National Semiconductor.

"With all that weight behind us, we've had considerable success in turning out the highest quality Custom components you can find.

"But depending on your applications, unit volume and several other considerations, we may find that standard microprocessors or discrete logic would be your best solution.

"This is where National stands alone among all Custom suppliers. Because if your needs don't actually justify the Custom approach, we won't try to sell you on it.

"National's standard product line is extremely broad-based, numbering literally into the thousands. And we in Custom MOS/LSI can and do



bring all these resources to bear in finding the design solution that best fits your needs.

"It may turn out that your product could make reasonably efficient use of standard microprocessors' generalized instruction set. Or even a discrete logic design. But when your unit volume is, say, 40K or more, a Custom circuit may reduce systems costs.

"We'll design Custom circuits for you if it's a sound decision. But if not, National has plenty of other Practical Wizards that can tailor your system anyway.

"That's why everyone who comes to National for Custom MOS/LSI gets the best solution possible.

"If you're undecided as to which design approach is right, come to National Custom MOS/LSI. Can you afford not to?"

Mike Turner, Marketing Manager, Custom MOS/LSI

## What's new from the National archives?

005 ☐ Additional Custom MOS/LSI Information

006 ☐ Special Functions Data Book (\$6.00)

015 ☐ MST Program Brochure

035 ☐ Additional Series/80 Information

036 ☐ Optoelectronics Handbook (\$3.00)

037 ☐ Additional STARPLEX and ISE Information

038 ☐ MM5290 Data Sheet and Additional Information

Enclose check or money order based upon appropriate currency. Make checks payable to National Semiconductor. Allow 4-6 weeks for delivery.

NAME \_\_\_\_\_

TITLE \_\_\_\_\_ PHONE \_\_\_\_\_

COMPANY \_\_\_\_\_

ADDRESS \_\_\_\_\_

CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

EDN

For desired information, mail coupon to:  
National Semiconductor Corporation  
2900 Semiconductor Drive  
Mail Stop 16250  
Santa Clara, California 95051

In Europe, mail coupon to:  
National Semiconductor GmbH  
Industriestrasse 10  
D-8080 Fürstentfeldbruck  
West Germany



**National Semiconductor**

The Practical Wizards  
of Silicon Valley

NA10



# DPM's IN STOCK MEANS SUPER FAST DELIVERY

From Coast to Coast Gralex has the DPM's you want, in stock, for quick delivery. And we can custom scale every meter to meet your specific application. Gralex state-of-the-art meters from 0.05%, 3½ digit, under \$30 units through high-quality instrument grade, 3¾ digit units, AC line power meters, ¾" deep units, true RMS meters, LED or gas planar.



## GRALEX

### INDUSTRIES

A General Microwave Division

155 MARINE ST., FARMINGDALE, N.Y. 11735

**Tel. 516-694-3600 • TWX 510-224-6406**

**Gralex meters are available at these distributors:**

**Brownell Electro**, Mobile AL 36607 - 205 479-8581 **Metermaster**, Phoenix AZ 85040 - 602 243-4111 **Fisher-Brownell**, Santa Clara, CA 95050 - 408 988-6041 **Fisher-Brownell**, Los Angeles, CA 90061 - 213 770-0310 **Fisher-Brownell**, San Diego, CA 92123 - 714 231-1041 **Metermaster**, Los Angeles CA 90040 - 213 685-4340 **Metermaster**, Palo Alto CA 94303 - 415 968-0313 **Metermaster**, San Diego CA 92123 - 714 560-4841 **Dynatron**, Santa Clara CA 95050 - 408 246-6535 **Meter Craft**, Irvine, CA 92714 - 714 979-1420 **Metermaster**, Denver CO 80223 - 303 722-5766 **Century Electronics**, Wheatridge CO 80033 - 303 424-1985 **Summit**, Dania, FL 33004 - 305 920-6253 **Tampa Instrumentation Center**, Tampa, FL 33614 - 813 870-0183 **Brownell Electro**, Orlando FL 32806 - 305 843-6770 **Brownell Electro**, Hapeville GA 30354 - 404 762-5181 **Aloha Associates**, Honolulu, Hawaii 96826 - 941-1574 **Metermaster**, Elk Grove Village IL 60007 - 312 593-8650 **Sunshine Scientific Inst. Inc.**, ElkrIDGE MD 21227 - 301 796-5600 **Metermaster**, Billerica MA 01821 - 617 667-8346 **Brownell Electro**, Woburn MA 01801 - 617 935-7820 **Brownell Electro**, So. Plainfield NJ 07080 - 201 753-4600 **Century Electronics**, Albuquerque NM 87108 - 505 292-2700 **Brownell Electro**, Charlotte NC 28216 - 704 394-3186 **Summit**, Rochester, NY 14623 - 716 334-8110 **Summit**, Buffalo, NY 14202 - 716 884-3450 **Instrument Mart Inc.**, Great Neck NY 11021 - 516 487-7430 **Brownell Electro**, New York NY 10011 - 212 691-1171 **Sunshine Scientific Inst. Inc.**, Phil. PA 19115 - 215 673-5600 **Brownell Electro**, Knoxville TN 37922 - 615 690-8312 **Brownell Electro**, Memphis TN 38116 - 901 332-9258 **Brownell Electro**, Nashville TN 37201 - 615 889-8230 **Metermaster**, Garland TX 75041 - 214 271-5671 **Meters and Instruments Corp.**, Houston, TX 77023 - 713 644-1631 **Century Electronics**, Salt Lake City UT 84119 - 801 972-6969 **Summit**, Canada Zenith 2-7710

For more information, Circle No 8



# News Breaks

structured-programming techniques. The seminar will be held in Lexington, MA on July 28 through August 1. Professor Donald D French can give you the scoop — call (617) 964-1412.—JM

## **VHSIC CONTRACTS WILL ENHANCE MILITARY ELECTRONIC SYSTEMS**

Focusing on CMOS/SOS technology, Rockwell International's Electronic Systems Group (Anaheim, CA) and Sanders Associates (Nashua, NH) will undertake a \$1.6 million 1-yr contract for the definition phase of a very high-speed-integrated-circuit (VHSIC) program. The team will address the signal-processing requirements of communications, imagery and electronic-warfare systems — with the aim of developing a broadly applicable architecture for these disciplines.

In a separate development, Westinghouse Electric Corp (Washington, DC), with team members National Semiconductor, Control Data Corp and the Mellon Institute, has also received a \$1.2 million Phase 0 VHSIC contract from the US Navy. The group will select candidate systems for potential VHSIC applications and prepare a technical approach for subsequent phases.—WT, JM

## **SYMPOSIUM TO EMPHASIZE STEPPING-MOTOR APPLICATIONS**

If requirements for accurate positioning leave you at a standstill, the ninth annual Incremental Motion Control Symposium will bring you up to speed. Most of the gathering's planned exhibits and 40 of 50 scheduled papers will center on stepping-motor applications, while the remaining presentations will treat dc-servo systems and other motion-control schemes. For more information on the conference, slated for June 2 through 5 in Champaign, IL, contact the Incremental Motion Control Systems Society, Box 2772, Station A, Champaign, IL 61820, or phone (217) 333-4341. And to pique your curiosity on the subject, turn to pg 37 in our April 5 issue for an update on stepper-motor technology.—RN

## **THE FOCUS IS ON COBOL FOR COMMERCIAL APPLICATIONS**

Having discovered that 90% of the programming for the commercial and small-business market occurs in COBOL, Zilog will aim its next generation of computer systems at the multiterminal COBOL environment. To actively pursue this market, the Cupertino, CA-based manufacturer plans introductions, beginning in the second quarter, of a new family of computers that will offer increased floppy-disc storage, a multitasking operating system, faster processing and increased remote-data-communications capabilities. These systems will be based on the 4-MHz Z80A  $\mu$ P and will address the same applications as the firm's current MCZ-1 family.—ET

## **HOTLINE SERVES HANDICAPPED PERSONS' EQUIPMENT NEEDS**

If you're physically handicapped (or know someone who is) and require information on communication equipment, call (503) 357-4354, a hotline set up by Tektronix's (Beaverton, OR) Special Interest Group on Computers and the Physically Handicapped. Monitored by an answering machine, the hotline answers questions and provides referrals regarding the special-equipment needs of the blind, motor impaired or deaf.—JB


## **INSTRUMENT FIRM OFFERS CONSULTING SERVICE**

The Nicolet Consulting Group (Northvale, NJ) provides a service for the solution of various structural problems — whether you're using Nicolet Instruments equipment or not. The group specializes in vibration and dynamics problem solving, computerized dynamic modeling, performance prediction and dynamic model verification. To discuss this service, contact Dot Hubner at (201) 767-7100.—JM



## "NOTHING SUCCEEDS LIKE SUCCESS"

That quotation from Alexandre Dumas certainly applies to INTERSIL INSIGHT. Our first issue brought a deluge of inquiries from engineers wanting to know more about the latest in our broad line of linears, RAMs, ROMs, data acquisition systems, power MOS, display drivers... you name it. And INTERSIL INSIGHT #2 is equally packed with timely information. So when an item catches your eye, just check the appropriate number on the coupon on the back page for more product data. We call it the **You Got Me!** coupon. Be sure to check it, clip it, and send it in. Additional information will be on its way to you fast. And in case you missed INSIGHT #1, you can check 17 for a reprint.

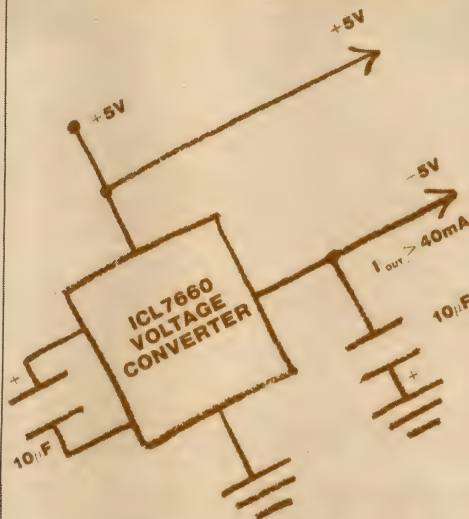


## HOW TO GET -5V OUT FROM +5V IN.

**P**ower your analog circuitry from your digital power supply with the new CMOS ICL7660. It's a unique monolithic chip which converts positive voltage to negative voltage with 99.9% voltage conversion accuracy ( $R_L = \infty$ ). With 98% power conversion efficiency ( $R_L = 5K\Omega$ ). And  $I_{OUT}$  is greater than 40mA ( $R_{OUT} = 55\Omega$ ). So forget about that expensive second analog supply or those bipolar kluge circuits. Need -5V for a board full of dynamic RAMs? The ICL7660 is the inexpensive answer: only \$1.95 each in 8-pin minidips, in 100 piece quantities. Need higher negative voltages? Just cascade multiple 7660's. Need more current? Hook 7660's in parallel. It's a very versatile device. Check 18.

"Nothing Succeeds Like Success."


For our Alexandre  
Dumas poster,  
check 20.

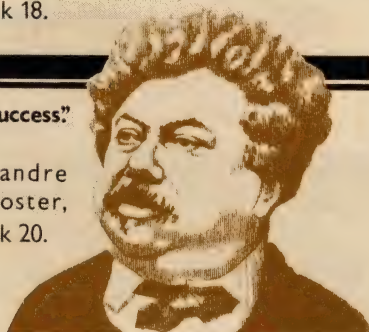

## Acquire Data One Mile Away with REMDACS™

If you design data acquisition systems, our new REMDACS concept will light up your life at a cost of only \$30 per channel. REMDACS is a remote data-acquisition and control system which permits analog sensors to be linked to a host computer up to one mile away... through a single twisted pair of wires. REMDACS consist of two basic cards. The 4 x 7-inch remote station board will accommodate either voltage or temperature measuring inputs. The other 4 x 7-inch receiver/transmitter card not only handles communications with the remote stations, but formats data to and from the host computer. Conversation between cards is in a serial party-line protocol. Need more stations? A single receiver/transmitter card can address up to 512 remote stations... 256 with 24-bit dual-word-length message formats and 256 with 44-bit message configurations. For quick evaluation, a third card is available which is compatible with the RS232 serial I/O port standard on most CPUs. For our brochure on this exciting new D/A system concept, check 19.

TM—REMDACS is a trademark of Intersil, Inc.

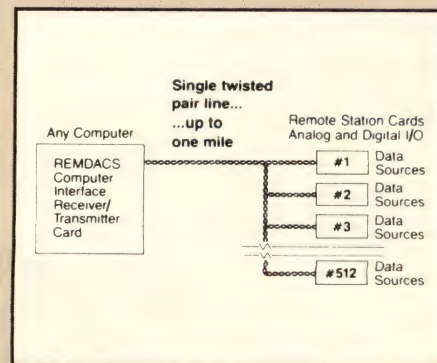





## IMPROVED CMOS TOUCH- TONE ENCODER.

Here's a new version of Intersil's popular CMOS 7206 touch tone encoder. The new ICM7206C combines both oscillator mute and single contact keyboard functions on one chip—and avoids spurious side tones. The 2-of-8 sine wave touch tone encoder features fast oscillator start-up (5ms), extremely low distortion (<5%) and low voltage operation (down to 3V). The ICM7206C works with either 3x4 or 4x4 key formats for minimum cost keyboard design. It's intended for telephones, numeric data entry and the like. Check 21.

## A Low Cost Alternative Micro for OEM PDP-8 Users.

If you're getting long delivery quotes on PDP-8® minicomputers, here's an attractive low-cost alternative: Intersil's new LSI-8 microcomputer. It's ideal for medium and high volume general-purpose

applications requiring a powerful, reliable, easily serviced computer. It comes in four modules: CPU with dual serial I/O; 32K RAM memory board; 4K battery-backed-up CMOS RAM board; and DMA flexible-disk controller. And a large software base is available. The full system, with CPU, 32K memory and dual flexible disks, is \$4145 in 25-unit quantities. Without dual flexible disks, systems start at \$1525. Check 22.

® PDP-8 is a registered trademark of Digital Equipment Corporation.

## A HIGH- SPEED LOW- POWER 2147.

It's called the IM7147. It features 55ns access time and consumes only 20mA in the standby mode. This new 4K static RAM has all of the good things associated with Intersil's expertise in CMOS, including lower power dissipation and higher system reliability. Not to mention the reduction in power supply and cooling requirements. The bottom line is superior performance with significant savings. The price: \$36.80 in 100s. For more information, check 23.

	Operating Power	Standby Power	Access Power
IM7147	125mA	20mA	70ns
IM7147L	100mA	10mA	70ns
IM7147-3	125mA	30mA	55ns
IM7147L-3	110mA	20mA	55ns
(military) IM7147LM	125mA	20mA	85ns

## TWO NEW CHIPS FOR VACUUM FLUORESCENT DISPLAYS.

## 4½ Digit Counter with VF Static Display Drivers.

The ICM7236/ICM7236A are new low-power up-counters with static drivers for vacuum fluorescent displays. They are high-performance CMOS devices including decoders, output latches, count inhibit, reset and leading-zero blanking circuitry on a single chip. For fast counting, 15MHz is guaranteed and 25MHz is typical. ICM7236 has a maximum count of 19999, ICM7236A has a maximum count of 15959. Power consumption is only 10µA typical. Store and Reset inputs permit use as a frequency or period counter. The price in plastic: \$5.86 in 100s. Check 24.

## From µP to VF Display with One Chip.

The new ICM7235 is a single chip interface between microprocessors and non-multiplexed 7-segment vacuum fluorescent displays. It comes with multiplexed BCD input for digital logic interface, or




with high-speed  $\mu P$  interface. You can get either hex (0-9, A-F) or code B (0-9, dash, E, H, L, P) outputs. The ICM7235 features display blanking, static discharge protection, brightness control and, most significantly, the saving of up to seven TTL or CMOS devices per display. It's great for digital instruments, automobile readouts and a wide range of other displays applications. For more data, check 25.

## CMOS MEMORY BOARD FOR MULTIBUS<sup>®</sup> MICROS.

The new MCB-332 32K byte memory board features low-power CMOS static RAMs and total compatibility with SBC 80/10, 80/20, 80/30 and 86/12 microcomputers. Data can be either 8 bits or 16 bits wide, depending on MULTIBUS control inputs. Worst case memory access time is 350ns max. Memory cycle time is 500ns min. Fast response time requires no wait state injection when used with most microcomputers. All interface address, data and command signals are TTL-compatible, and battery back-up is on board for 21-day data retention. All this, plus immediate delivery from Intersil. Check 26 on the You Got Me coupon.

® MULTIBUS is a registered trademark of Intel Corp.

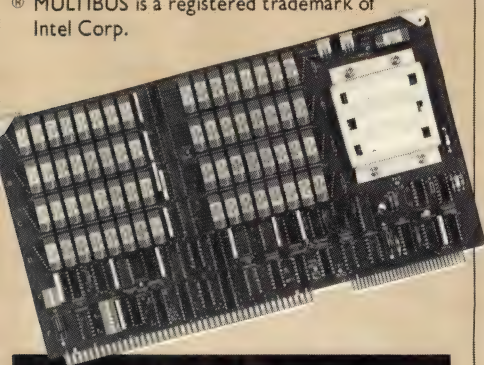


## DESIGNER'S CORNER: (THE FIRST OF A CONTINUING SERIES)

### Switching Pre-Amp Extends A/D Converter Sensitivity.\*

The low-signal resolution of an A/D converter such as the Intersil ICL7106 is limited by the noise level at 100mV per count. Simple preamps can cause problems, and choppers can be expensive. But a differential preamplifier, phase-switched at 50% duty cycle, will virtually eliminate input offset error and allow a 10 times increase in converter sensitivity. The normal conversion process will not be affected ... the converter will see the average of  $V_{IN}$  over the switching period, multiplied by the gain. However, offset voltage at the input will be alternately fed to the con-

verter with  $+Ve$  and  $-Ve$  polarity. The equivalent offset voltage over a cycle will be near zero. The LCD backplane drive of the ICL7106 is a perfect 50% duty cycle signal, synchronous with conversion, to drive the Intersil IH5046 analog switches at a nominal 60Hz rate. The TEST output (37) provides the low logic level to the switch drivers. Most dual op amps will be suitable, but devices with crossover distortion (viz, LM324) should not be used.

\*Copyright McGraw-Hill, Inc., 1979. All rights reserved.

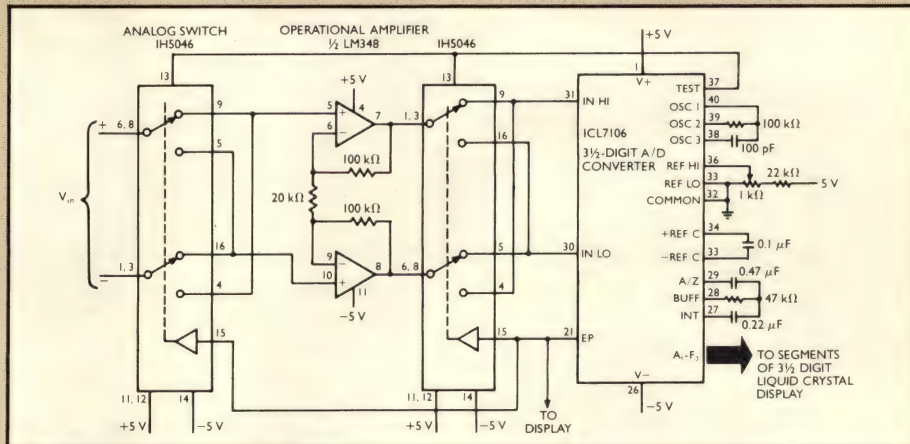

## A SEMINAR FOR SERIOUS DATA ACQUISITIONERS ONLY.

From March 18 through May 2, Intersil will be presenting in-depth data acquisition seminars across the country. The focus is real-life applications. But no "overviews." No ABCs. In three information-packed hours, you'll get an armload of state-of-the-art techniques for designing data acquisition systems. You'll also see real systems that have been prototyped and tested: a high-speed successive-approximation multi-channel system, an auto-

-ranging  $4\frac{1}{2}$ -digit DMM system, a complete frequency/period counter/timer system, an intelligent instrument system, a digital transmitter/transducer system, a remote data system with serial output. This seminar is a must for any serious data acquisitioner. For date and location in your area, call (408) 996-5403.



	CMOS UART	PMOS UART
Speed	up to 4 MHz	200 KHz
Power Consumption — Active	6.6 mW	385 mW
Power Consumption — Standby	4.4 mW	385 mW
Power Supplies	Single	Two or Three
Noise Immunity	50%	30% or less
Operating Temperature	-40 to +85°C*	0 to 70°C
Price	\$3.80	\$4.00-\$7.50

\*Military temperature unit also available.

## CMOS UARTs 20x FASTER THAN PMOS.

The chart tells the story. Our IM6402/IM6403 CMOS UARTs beat PMOS UARTs hands down in speed and price. What's more, the CMOS technology offers lower

power, better noise immunity, better reliability, and greater flexibility. For instance, you have two oscillator options: the IM6403's on-chip oscillator eliminates additional circuitry such as baud-rate generators; or use the IM6402 and add your own off-chip clock generator. Both devices are programmable for 5 to 8-bit word lengths and interface to most popular microprocessors, such as the Intersil IM6100 CMOS family. For full technical data, check 27.

## INTERSil YOU GOT ME! VOL. 2

Please send me data on the following:

- |                             |                             |                             |                             |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| <input type="checkbox"/> 17 | <input type="checkbox"/> 21 | <input type="checkbox"/> 25 | <input type="checkbox"/> 29 |
| <input type="checkbox"/> 18 | <input type="checkbox"/> 22 | <input type="checkbox"/> 26 | <input type="checkbox"/> 30 |
| <input type="checkbox"/> 19 | <input type="checkbox"/> 23 | <input type="checkbox"/> 27 |                             |
| <input type="checkbox"/> 20 | <input type="checkbox"/> 24 | <input type="checkbox"/> 28 |                             |

Name \_\_\_\_\_  
 Company \_\_\_\_\_  
 Address \_\_\_\_\_  
 City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_  
 Country \_\_\_\_\_

For more information, just  
check the appropriate box,  
then clip and mail!

Intersil Insight  
Marketing Services  
10710 No. Tantau Ave.  
Cupertino, CA 95014

Tel: (408) 996-5000 Outside California  
TWX: 910-338-0171 (800) 538-7930

EDN42080

## Hot New Lit.

### Commulating Design for IC Amplifiers Virtually Eliminates Offset Errors (#R010).


An article reprint from *Electronic Design* covering operation and application of our new ICL7600/ICL7605 Commulating Auto-Zeroing (CAZ) amplifiers. Check 28.

### Dual Word Length Serial Protocol Improves Data Acquisition Network (#R007).

Detailed discussion of protocol considerations involved in revolutionary new REMDACs remote data acquisition concept. Reprint from *Computer Design*. Check 29.

### Reduce CMOS Multiplexer Troubles Through Proper Device Selection (#R009).

Reprinted from *EDN*, this tells how to overcome output leakage current and over-voltage protection problems in CMOS analog multiplexers. Also, how to reduce component count and cost. Check 30.

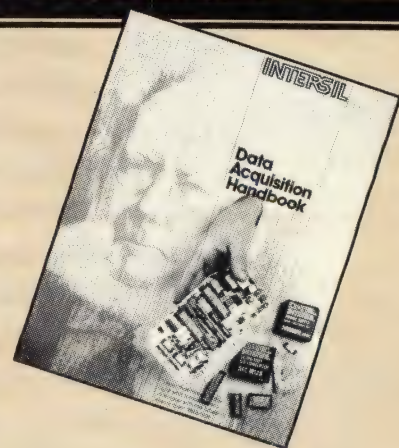

Order our big, brand-new Data Acquisition Handbook: only \$5. The last word on the whole spectrum of leading-edge data acquisition products, systems, design and debugging information. Send check or money order to the Intersil Marketing Services address on the coupon.



# Signals & Noise

## Designing takes a degree of imagination

Dear Editor:

For years I have been reading articles in trade magazines on how nondegreed people have been encroaching on the sacred domain of the graduate engineer. The feeling I get from these stories is this: Only if one sits through 4 yrs of college classes is one qualified to do design work.

I have been working in electronics for more than 10 yrs, the last five of which have been spent designing electronic equipment. I have achieved this record without the sanction of an accredited college or university, proving that formal education does not necessarily qualify a person for electronic design. Indeed, some might even be so bold as to say that a structured system smothers an individual's imagination and

common sense.

Until it's recognized that the degree does not make the person, many good people and ideas will be wasted.

*Sincerely,*

*John T Abrams*

*Society for the Prevention of  
the Glorification of Sheepskin  
Bohemia, NY*

## Even editors get the blues sometimes

We're embarrassed. In our writeup of Datel-Intersil's ADC-815 (Editor's Choice, February 20, pg 69), we omitted a basic parameter. The A/D converter is a 10-bit unit. We thank John D Fogarty of Columbia, MD, and other readers, for putting us in our place.

## Obscure timer specs

Dear Editor:

The article on IC timers (EDN, January 20, pgs 111-117) prompts me to offer an observation regarding a 556 quirk: In Fairchild's and Signetics' 556s, at least, but *not* in National's, trigger LOW overrides threshold HIGH to maintain Q HIGH. I employed


## Your turn....

EDN welcomes your comments, pro or con, on any issues raised in the magazine's articles. Address letters to **Signals and Noise Editor, EDN, 221 Columbus Ave, Boston, MA 02116**. Names will be withheld upon request. We reserve the right to edit letters for space and clarity.


## Carborundum noninductive ceramic power resistors solve tough problems.

Carborundum makes three types of noninductive ceramic resistors that can solve tough resistance problems, save money and space.

### Energy Dissipation

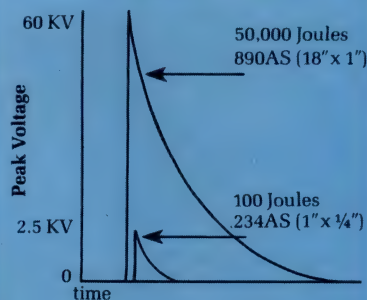

### Power Dissipation

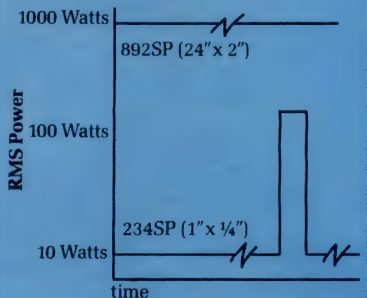

Regardless of the pulse shape, we have the resistor. Our Type SP handles large amounts of power from 60 cycles to many megahertz. Type AS can absorb huge amounts of energy while maintaining its noninductive properties at high voltages. Type A solves high resistance problems in high voltage situations.

For more information on ceramic power resistors and our broad line of thermistors and varistors, contact: The Carborundum Company, Graphite Products Division, Electronic Components Marketing, P. O. Box 339, Niagara Falls, New York 14302. Telephone: 716-278-2521.

**CARBORUNDUM**



A Kennecott Company

For more information, Circle No 9




"I WAS QUITE ELATED  
WHEN HE SAID THEY PLANNED  
TO SPEND MONEY LIKE WATER  
FOR RESEARCH.....  
IT TURNED OUT TO BE  
A DROP AT A TIME."






Visicorder Model 1858

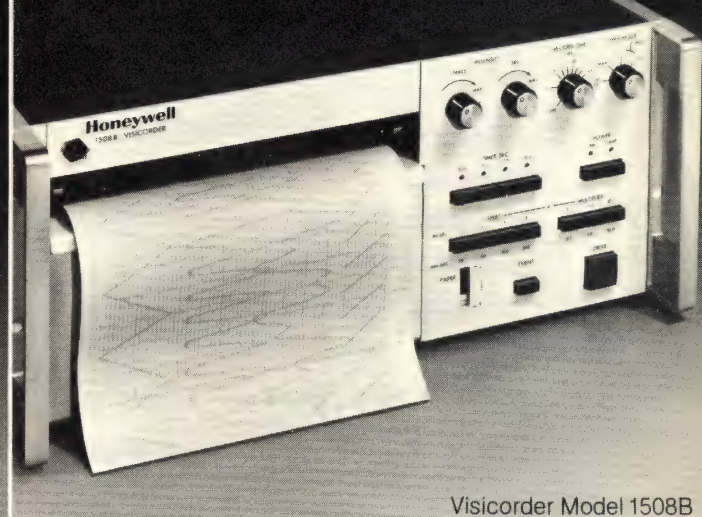


Visicorder Model 1508B



Visicorder Model 1508C

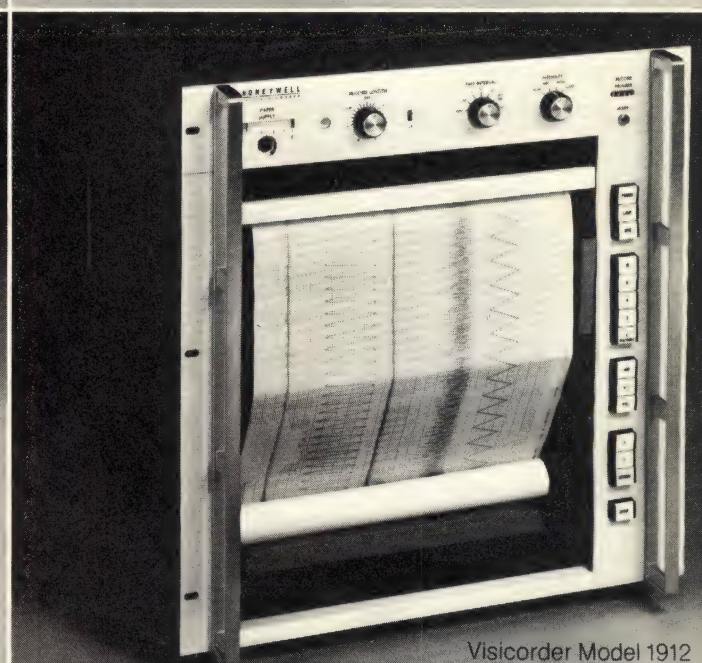

Visicorder Model 1912

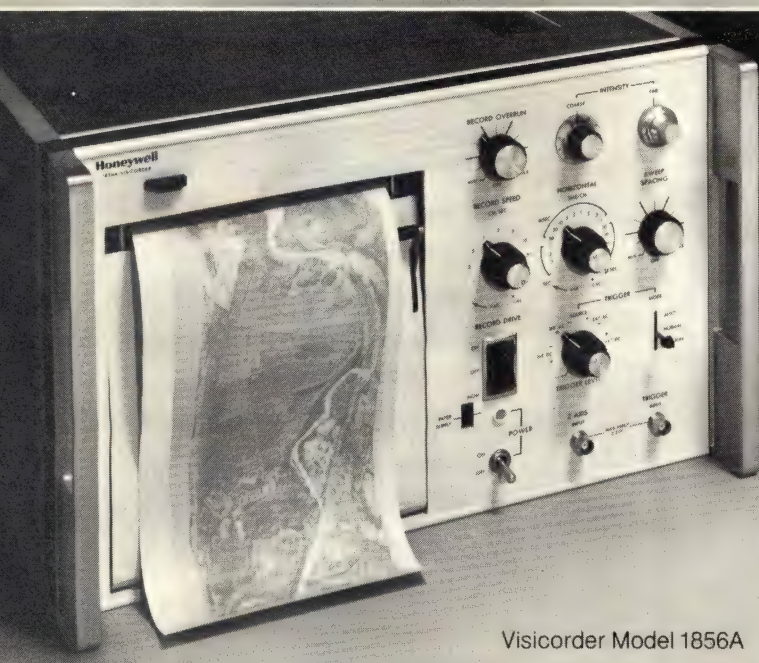

Visicorder Model 1856A



Visicorder Model 1806A



# MEET SIX TOP RECORD MAKERS.

Perhaps the data you need can best be obtained by a high-performance oscillographic recorder with excellent trace resolution. Or you may require a linescan image recorder having very fast scan rates and a broad gray scale. Whatever it takes to get your data, chances are you will get it faster and easier with one of the recorders shown here.

## **These Visicorder oscillographs set the standard for high-performance graphic recording.**

Visicorder Model 1858 is a completely self-contained system with up to 18 channels, yet it stands less than nine inches high. This unexcelled portability, enhanced by a wide selection of miniature, plug-in signal conditioners, makes the Model 1858 ideal for field or mobile use. And its dc to 5 kHz response, wide chart speed range, 100  $\mu$ V-300V input sensitivity, and the ease with which it expands to 32 channels also make it a favorite in the lab. A fiber-optic CRT assures sharp traces of high resolution across the entire 8-inch record.

Visicorder Models 1508B and 1508C offer dc to 25 kHz response, wide chart speed range and writing speeds greater than 50,000 inch/sec. Both combine

high-linearity optical systems with sensitive galvanometers to produce extremely accurate 8-inch-wide recordings. The Model 1508B has 24 data channels plus 4 for event recording; Model 1508C has 12 data channels plus 2 for event recording.

Visicorder Model 1912 offers the most data channels, widest recording paper, and widest transport speed range of all Honeywell galvanometer-type oscillographs. This versatile recorder can handle up to 36 channels of data, in addition to 6 channels of event recording. It accommodates 12-inch-wide paper at speeds from .005 to 200 inch/sec.

## **Do you need 4-axis recording capability? Our linescan image recorders give you the kind of record quality you can only get with a direct writing fiber-optic CRT.**

Visicorder Model 1856A produces 6-inch-wide records that have exceptionally high resolution and wide gray scale. This makes the recorder particularly suited for such applications as facsimile, spectrum analyzer readouts, IR mapping and echocardiography. Z-axis response is dc to 8 MHz, Y-axis is dc to 75 kHz, and the X-axis is capable of scan rates to 18,000/sec. Accessories are available for film records.

Visicorder Model 1806A can record, on 6-inch-wide paper,

high-frequency signals that would otherwise require magnetic tape or oscilloscope camera techniques. It offers Y-axis response from dc to 1 MHz, Z-axis to 10 MHz, X-axis to 1 MHz and writing speeds greater than 1,000,000 inch/sec. The Model 1806A also accommodates accessories for film records.

## **Honeywell's Accudata signal conditioning modules speed most recording and measurement tasks.**

Whether you need to control and amplify strain-gage signals, drive oscillograph galvanometers or magnetic tape recorders, or amplify low-level signals where relatively high common mode voltages are encountered, we have the modules to do the job easily and economically. Just give us your requirements and we'll show you an Accudata signal conditioner than can meet them.

For detailed information on any of these recorders or Accudata modules, call Lloyd Moyer at (303) 771-4700. Or write for our technical data sheets and a free brochure that describes all of Honeywell's Visicorders, magnetic tape systems and Accudata modules. Honeywell Test Instruments Division, Box 5227, Denver, CO 80217.

## **WE'LL SHOW YOU A BETTER WAY.**

# Honeywell



## High Performance Op Amps

**LOW NOISE FET**  
2nV/ $\sqrt{\text{Hz}}$  Noise Voltage  
+15 Volt Single Supply  
 $\pm 600\text{V}/\mu\text{sec}$  Slew Rate  
100G $\Omega$  Input Impedance

Model 9913 8-Pin DIP  
\$18.00 (3-9)

**LOW NOISE FET**  
5nV/ $\sqrt{5\text{Hz}}$  Noise Voltage  
 $\pm 150\text{V}/\mu\text{sec}$  Slew Rate  
Adj. Current and Voltage Gains  
100G $\Omega$  Input Impedance

Model 9923 14-Pin DIP  
\$35.00 (3-9)

### HIGH SPEED - LOW COST

60dB Open Loop Gain  
300MHz Gain Bandwidth Product  
150nsec 0.1% Settling Time  
 $\pm 150\text{V}/\mu\text{sec}$  Slew Rate

Model 906H 14-Pin DIP  
\$15.00 (3-9)

MIL Packages also available  
Request 96-page Op Amp.  
Function Module Catalog.



Box 1140 • Tucson, AZ 85734 • 602 624-8358 • TWX: 910-952-1283

For more information, Circle No 398

## Signals & Noise

this feature in a design and found it necessary to specify which firms' 556s could and could not be used.

My experience reminds me of the old rule that says "never depend on an unspecified characteristic." I grant, though, that 555-type products' data sheets have been among the more obscure I've encountered.

*Sincerely,*  
K C Herrick  
Chief Engineer  
ESI Electronics Corp  
San Francisco, CA

### Memory refresh

Dear Editor:

EDN's article on programmable - memory choices (January 5, pgs 80-98) incorrectly referred to the Texas Instruments TMS 2508 as being the same device as the industry-standard 2758. The TMS 2508 is a true 8k 5V EPROM which operates at a maximum access time of 250 nsec. The 2758 (which TI also supplies) is a partial 16k 5V EPROM operating at 450 nsec.

*Sincerely,*  
Frank Hrobak  
MOS Memory Marketing  
Texas Instruments Inc  
Houston, TX

### NEXT TIME



In EDN's May 5 issue, look for a preview of key sessions and product exhibits at NCC '80. This year's National Computer Conference promises to be bigger and better than ever, and EDN will be there. Also look for feature articles on

- The latest serial printers, complete with a handy clip-out chart
- The next step in EDN's hands-on  $\mu\text{C}$  Design Series exploration of analog  $\mu\text{Ps}$

You can't afford to miss this issue!


**EDN: Everything Designers Need**

# INTERFACE

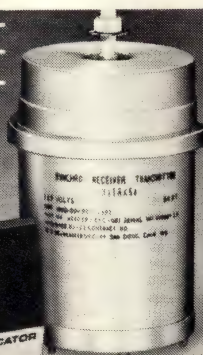

Vernitech converters:  
S/D, D/S Angle Position Indicators,  
Linear DC output, high rel.  
2 speed and specials

**WE KNOW OUR SYNCHROS**



## VERNITECH

a division of Vernitron Corporation  
300 Marcus Boulevard, Deer Park, N.Y. 11729  
(516) 586-5100 / TWX 510-227-6079


POTENTIOMETRIC TYPE PRESSURE TRANSDUCERS • VIBRATORS • MOTOR GENERATORS  
SERVO • STEPPER • SYNCHRO/ DIGITAL CONVERTERS • READOUTS • BRAKES & CLUTCHES  
INERTIALLY DAMPED AND HYSTERESIS SYNCHRONOUS MOTORS

For more information, Circle No 399



# MORE POWER TO YOU! (OR LESS)

You really do have a broader choice.

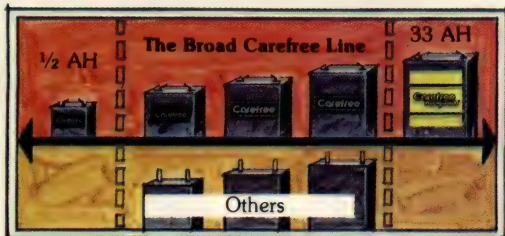


When you need maintenance-free rechargeable batteries, you'll find the broadest range of sizes in the Carefree® line—models either *more* powerful or *less* powerful than those available from our competitors.

Our 6 Volt 1/2 Ampere Hour model—the world's smallest maintenance-free rechargeable—provides

the same American-made dependability as our largest Carefree Magnum® models. These Magnum® batteries are noted in the industry for providing up to 20% more power in the same-size cases as conventional models.


More power—or less—than you'll find anywhere else. With about 30 standard sizes in between. Popular models like our 1, 5, and 8 Ampere Hour batteries. Or unique, special-purpose units.



All Carefree® rechargeables feature immobilized electrolyte technology. Guaranteed to deliver 100% capacity on first cycle, unlike gels. None of the

memory problems of nickel cadmium. That's why Carefree® immobilized electrolyte technology is becoming the standard of the industry. Specify it in your next design.

For some quick attention, fill out our coupon, or call us. Today.

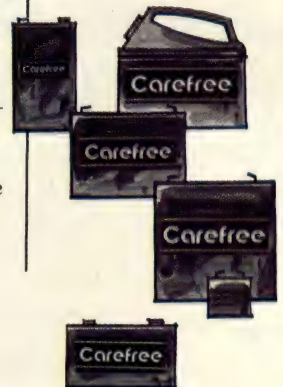

If you want to get technical, give us a call.



Eagle-Picher Industries, Inc. • Commercial Products Department  
P.O. Box 130 • Seneca, Missouri 64865 • 417 776-2258 • TWX 910 774-4533

- ☐ Please send me literature on your Carefree® maintenance-free rechargeable lead calcium batteries.
- ☐ Please have a Salesman call.

Eagle-Picher • Commercial Products Department  
P.O. Box 130 • Seneca, Missouri 64865

Name/Title \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

City/State/Zip \_\_\_\_\_

Area Code \_\_\_\_\_ Phone \_\_\_\_\_







# The stuff that dreams are made of.

A whole kingdom of richly endowed electron devices to make your design dreams come true.

The imaginative shall inherit the earth. And we want you to be part of our kingdom. We have a mind-boggling collection of wondrous little electron devices to ensure that all your design dreams for the future do indeed come true.

Modern electronic systems are becoming more complex and tinier by the day. Any "wonder product"—from a liquid crystal watch to a huge intercontinental telecommunications system—is only as good as the components inside. NEC wants you to be choosy when selecting such components. After all, a failed diode, transistor or capacitor can make a total system look bad. A failure is a failure. It makes sense to go with the best.

Rummage through our treasure of tiny gems. NEC has established a global reputation for producing a wide range of highly sophisticated and reliable electronic com-

ponents. We deliver hundreds of millions of them each year to discerning design and component engineers. Our tough pre-test burn-in techniques and fully automated QA methods make failure virtually an event of the past.

If you can imagine it, NEC probably manufactures it. Check out our rich range of products: tantalum capacitors, zener diodes, TO-92 and SOT-23 small signal transistors, power transistors, optoelectronic devices, Fluorescent Indicator Panels (FIPs™), SCRs and TRIACs, DIACs, linear ICs and ECL memory ICs.

Give your ideas the best our kingdom has to offer. Specify NEC. For the royal treatment, just fill out accompanying coupon and send it to us today.

## NEC

If you have designs on the future.



Let the crown prince of *The House of NEC*, Jason Stewart, show you the way to an enriched electronics future that won't cost you a king's ransom.

For more information, Circle No 13

NEC Electron, Inc.  
Mr. Jason Stewart, Executive Vice President  
3120 Central Expressway  
Santa Clara, CA 95051

Dear Jason:

I'm interested in your royal collection of little gems. Please send along your latest product line catalog and current rep list.

NAME \_\_\_\_\_

TITLE \_\_\_\_\_

COMPANY \_\_\_\_\_

ADDRESS \_\_\_\_\_

CITY \_\_\_\_\_

STATE \_\_\_\_\_ ZIP \_\_\_\_\_

EDN 4/20



# COME UP TO CLADS

## and meet high performance standards EECO did

EECO, Inc., of Santa Ana, California makes miniature electronic switches such as the thumbwheel switch shown below, in very large quantities to unusually high standards.

EECO uses TMI's inlay clads to get the job done for much less than the cost of the conventional approach which would include selecting a suitable spring material, gold plating the internal contact portion and solder plating the external connection. The EECO thumbwheel switch has a beryllium copper base metal inlaid with 18 kt gold and a toplay stripe 60Sn 40 Pb.

TMI can custom design an inlay clad which will return important materials and production savings and which will meet whatever performance standards you call for.


Ask for TMI's Handbook For Clad Metals.

### TECHNICAL MATERIALS, INC.

5 Wellington Road, Lincoln, Rhode Island 02865  
Telephone (401) 333-1700

### TECHNICAL MATERIALS, INC. (UK) LTD.

C2 Stafford Park 11, Telford, Shropshire TF3 3BJ

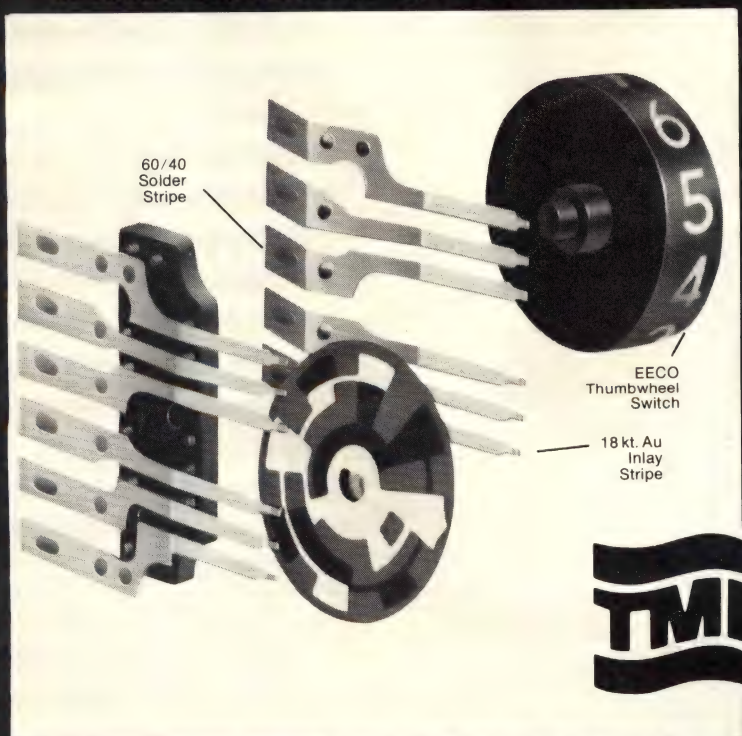

For more information, Circle No 14

## Books

**A comprehensive text  
on 6800- $\mu$ P use**

**Basic microprocessors and the 6800**, by Ron Bishop. 262 pgs; \$11.95 (paperback); Hayden Book Co, Rochelle Park, NJ, 1979.

Even though volumes of information have appeared concerning the basics of microprocessors—and the 6800 in particular—very few books take readers through all levels of the  $\mu$ P learning experience.

But this deficiency has now been corrected by author Ron Bishop. He assumes that if you are completely unfamiliar with electronics and computers, you deserve some background material. Therefore, his book's first six chapters provide a clear and concise exposition of basic electronics, logic and microcomputers in general.

Should you already understand the basics, however, you can skip immediately to Chapter 7, which begins an in-depth discussion of addressing modes.

Although two chapters on  $\mu$ P outboard chips read like data sheets (and indeed, they originated from these sources, according to the book's preface), two other chapters on software more than compensate for this shortcoming. Chapter 8, for example, fully describes each MC6800 instruction, presents examples of addressing-mode use and describes the effect of instructions on condition codes and execution times.

The book's final chapter, "Example Programs"—one of the best ever written in this genre—not only presents valuable working programs that summarize the concepts discussed earlier in the book, but also explains exactly what happens and why.—**Carl Warren**



# Ryton® gives an electric performance in living color.

Ryton® polyphenylene sulfide resins. What great performers in all kinds of electronic applications.

Ryton resins enjoy UL 94 V-O and 5V flammability ratings, without additives. They are the only thermoplastic molding compounds with a UL Temperature Index as high as 240° C. (464° F.). And where high voltages are a requirement, Ryton resins with a high arc resistance and low tracking rate are available. Stiffness and dimensional stability will give you production efficiencies (heat distortion temperature at 264 psi is over 260° C.). Chemical resistance is no problem since Ryton has no known solvents under 200° C. Ryton resins are also available in a range of colors.

Ryton molds with great ease and economy. At 325° C., it flows into injection molds with the smoothness of a 3 to 4 melt high density polyethylene at 260° C., making it ideal for small, intricate molds and thin wall sections. As for economy, don't throw away your Ryton sprues and runners. Just recycle them.

Learn more about this versatile engineering plastic and its application to your products and problems. For quick action from the Ryton Sales Engineer nearest you call our Phillips Engineering Plastics Office toll free . . . 800 231-3630 (In Texas 800 392-3716).





## Ryton® engineering plastics perform.

Phillips also produces K-Resin® butadiene styrene polymers and Marlex® polyolefin resins. Call toll free 800 231-1212 (In Texas 800 392-2078).

**PHILLIPS CHEMICAL COMPANY**

A DIVISION OF PHILLIPS PETROLEUM COMPANY

For more information, Circle No 15

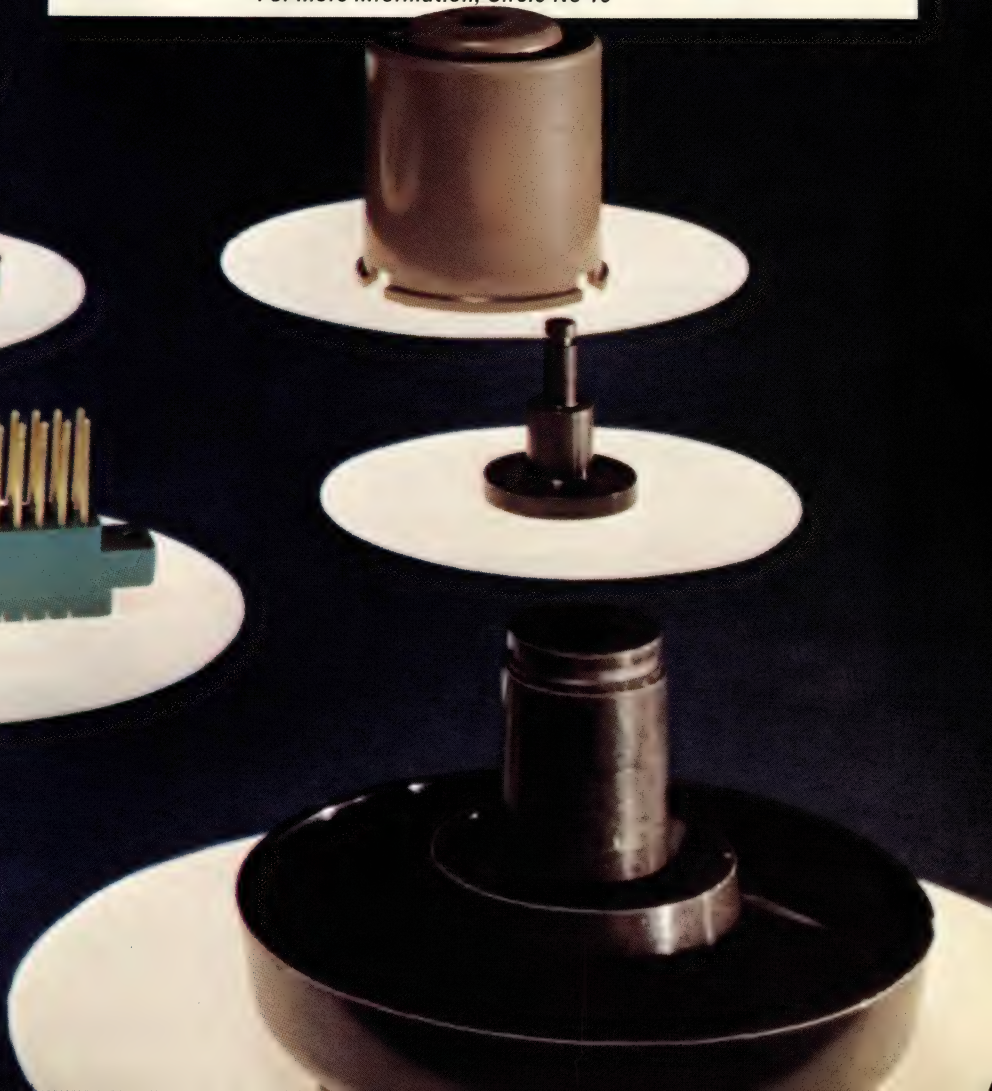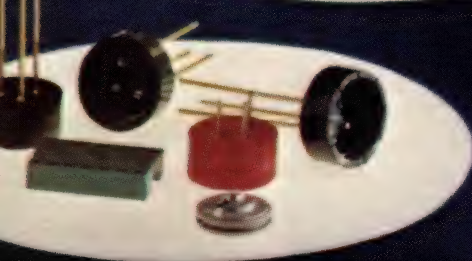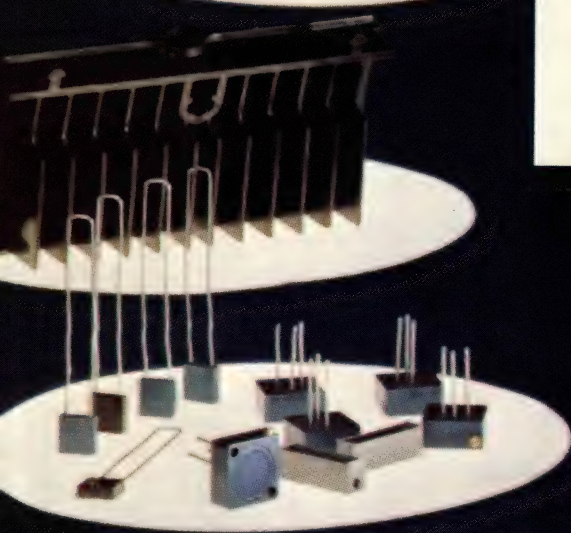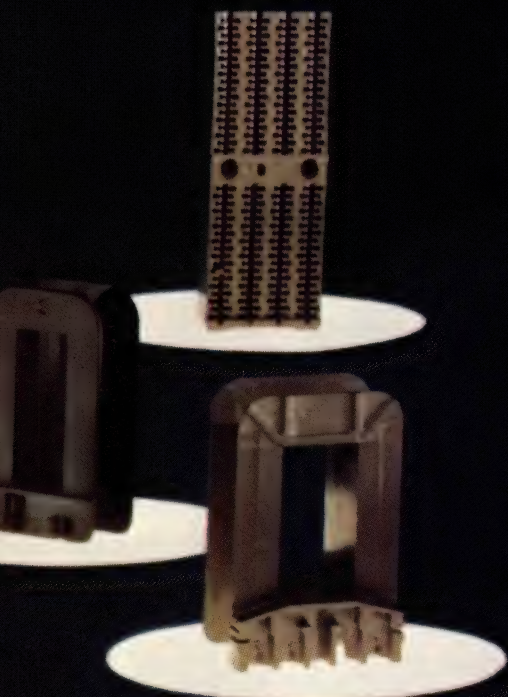






# Your authorized P&B distributor has stock answers to some of your toughest design problems.

Get exactly what you need when you need it.

For versatility and power switching capability, consider our KU series general purpose relays. They're offered with a wide range of contact forms, terminations and ratings. Handles loads up to 15 amps at 277 V AC or 10 amps at 150 V DC. Contact arrangements to 3 form C. 100,000 operations minimum at rated load. Test button and indicator lamp available. Screw terminal sockets and our new snap-in sockets make mounting especially easy. Standard relays are UL recognized and CSA certified.

Contact your authorized P&B distributor for free full-line catalog or write: Potter & Brumfield Division AMF Incorporated, 200 Richland Creek Drive, Princeton, IN 47671. 812/386-1000.

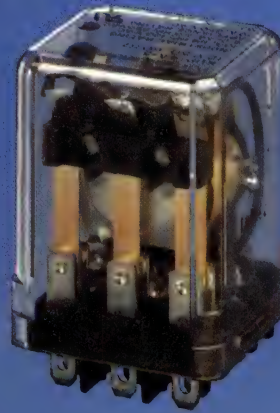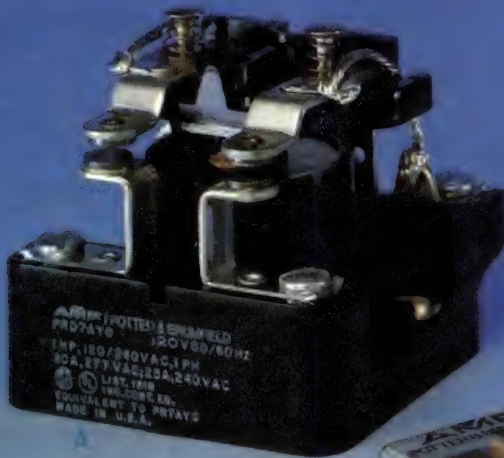

#### A. PRD 30 Amp Power Relay

This top quality relay is built for high inrush current applications such as motor starts and incandescent lamp loads. UL listed and CSA certified. Available to 2 form C plus a 1 form C auxiliary snap-action switch.

#### B. R10 General Purpose Relay

Six contact styles provide load carrying capability from dry circuit to 10 amps in contact arrangements from 1 form C to 8 form C. UL recognized and CSA certified. Optional indicator light available.

#### C. W58 Thermal Circuit Breakers

Single pole breakers provide reliable circuit protection at low cost. Recessed reset buttons cannot be pulled out manually. Quick connect or screw terminals. Trip-free feature. Ratings from 1-35 amps. UL recognized and CSA certified.

#### D. CU Solid State Time Delay Relay

Exceptional economy, compact design, and knob or resistor adjustability make the CU highly desirable whenever precise timing from 1 second to 120 seconds is required. 2 form C contacts are rated 10 amps at 28V DC, resistive, or 120V AC. UL recognized and CSA certified.

# Potter & Brumfield

For more information, Circle No 16





## Let's hear it for Silicon Circle

Route 128, the highway circling Boston and its suburbs, achieved fame in the '60s and early '70s because of the many high-technology companies abutting it. But its allure diminished in the mid-'70s, thanks to huge cutbacks in military/aerospace spending and the simultaneous growing dominance of high-technology semiconductor companies in California's Santa Clara Valley, also known as Silicon Valley.

One reason for Rte 128's prominence as a prime location for electronics firms was its closeness to great institutions such as MIT and Harvard, whose research labs have spawned many a high-technology company. Yet those labs have never focused on semiconductor technology as Stanford University has; hence the clustering of semiconductor companies in Silicon Valley—near Stanford.

Twenty years later, MIT is seeking to correct its oversight by establishing a \$5 million advanced-IC fabrication facility on its Cambridge campus. Although this effort doesn't compare with the \$16 million VLSI facility planned at Stanford, it's a start. It certainly will prove a boon for the many computer companies in the Boston area. And it should also be a stimulus for the region's few semiconductor companies, such as Analog Devices, Cherry Semiconductor, Sprague and Unitrode.

As a result of MIT's plans, will Rte 128 become Silicon Valley East—or better, Silicon Circle? Possibly, though on a smaller scale. When you view the current problems in Silicon Valley—including incredibly high living costs, shortages of skilled personnel and moratoriums on plant expansions—Silicon Circle offers an interesting alternative. The area not only will provide a significant semiconductor research facility at MIT, but it will also retain the other high-technology research labs and companies that made it famous two decades ago. Furthermore, Massachusetts is making valiant efforts to improve its business climate, thanks to the stimulus of the Massachusetts High Technology Council, headed by Analog Devices president Ray Stata.

EDN applauds MIT's move and hopes that the Golden Circle of Rte 128 will indeed become Silicon Circle. The resulting diversification can only have a beneficial effect on the electronics industry.

*Roy W. Forsberg*

Roy Forsberg  
Editorial Director

**An Award\*-Winning Magazine**  
1978 Staff-Written Series —  
System Design Project  
1978 Contributed Series —  
Designer's Guide to Fiber Optics  
1977 Contributed Series —  
Software Design Course  
1976 Special Issue —  
Microprocessor Reference Issue  
1975 Staff-Written Series —  
Microprocessor Design Series

\*Jesse H Neal Editorial Achievement  
Awards are the business-press Pulitzer  
Prize equivalent.



# THE SOURCE OF AC/DC V-A



## For high accuracy supply of AC/DC Voltage and Current

RFL's new Model 828 is a source of AC and DC Voltage and Current, it accurately and efficiently calibrates analog and digital meters, and is suitable for production line or field use.

### FEATURES

Digital Thumbwheel Switches quickly set up output current and voltage.

Percent Error Control provides for rapid determination of error of meter under test.

Run-Up Control varies output from 0-100% to check for sticky meter movements.

Automatic protection against output short circuits and overloads.

High output stability over all ranges.

### SPECIFICATIONS

#### Outputs:

- 1 Millivolt to 1100 Volts
- 1 Microampere to 5 Amperes

#### Accuracy:

- DC Voltage  $\pm 0.05\%$  of setting  $\pm 0.10\%$  of range
- AC Voltage  $\pm 0.10\%$  of setting  $\pm 0.10\%$  of range
- AC/DC Current  $\pm 0.10\%$  of setting  $\pm 0.10\%$  of range

#### Voltage Burden:

- 5 VA on 1 Volt Range;
- 10 VA all other Ranges.

#### Current Compliance:

- 5 Volts up to 1 AMP
- 1 Volt on 5 AMP Range

#### Percent Error Control:

- $\pm 2\%$  of setting

#### Output Frequencies:

- 50, 60 and 400Hz

#### Power Requirements:

- 100-230 Volts 50/60Hz



EST 1922

### RFL Industries, Inc.

INSTRUMENTATION DIVISION

Boonton, N.J. 07005 • Tel: (201)334-3100

TWX: 710-987-8352 • Cable: RADAIRCO, N.J.

For more information, Circle No 17

## Staff

### Executive VP/Publisher

H Victor Drumm

### Editorial Director

Roy Forsberg

### Editor

Walt Patstone

### Managing Editor

Jordan Backler

### Assistant Managing Editor

Bob Peterson

### Special Features Editors

Bob Cushman

Jim McDermott

### Editorial Staff

Earle Dilatush, *Senior Editor*

George Kotelly, *Senior Editor*

Tom Ormond, *Senior Editor*

George Huffman, *Associate Editor*

Rick Nelson, *Associate Editor*

Edward Teja, *Associate Editor*

Jesse Victor,

*Assistant/New Products Editor*

Joan Morrow, *Production Editor*

Dale Zeskind, *Contributing Editor*

### Editorial Field Offices

Andy Santoni, *Western Editor*

John Tsantes, *Eastern Editor*

William Twaddell, *Western Editor*

Carl Warren, *Western Editor*

### Consulting Editors

Jack Hemenway

Carol A Ogdin

Robert Pease

### Editorial Secretaries

Dianne Chieppo, Carol Murray,

Carole Smith

### Art Staff

Daniel S Kicilinski, *Director*

Vicki Blake, *Assistant*

Wasy Bidalack, *Illustrator*

Joan Joos, *Illustrator*

Susan Barrow-Williams, *Illustrator*

### Production Staff

William Tomaselli, *Supervisor*

Donna Horsch, *Assistant*

### Graphics Director

Lee Addington

### Production Director

Wayne Hulitzky

### Marketing Director

Jack Kompan

### Senior Circulation Manager

Earl Mosley

### Research Director

Ira Siegel

### Editorial Consultant

John Peter

### Editorial Office Addresses

**Boston** (617) 536-7780, 221 Columbus

Ave, Boston, MA 02116. **New York** (516)

931-4978, Box 913, Hicksville, NY

11802. **San Francisco** (408) 296-0868,

Sherman Bldg, 3031 Tisch Way, Suite

1000, San Jose, CA 95128. **Los**

**Angeles** (714) 851-9422, 2041 Business

Center Dr, Suite 214, Irvine, CA 92715.

Reprints of EDN articles are available on a

custom printing basis at reasonable prices

in quantities of 500 or more. For an exact

quote, contact Art Lehmann, Cahners

Reprint Service, 5 S Wabash, Chicago, IL

60603. Phone (312) 372-6880.



The new **SPE economy series** offers dependable, long-term performance at a modest price.

**General Specifications:**

Input Voltage: 115 Vac  $\pm 10\%$ , 60 Hz  $\pm 2$  Hz

Regulation: Line 0.1%, Load 0.1%

Outputs: 5 Vdc @ 3.0 Amps, 5/6 Vdc @ 5.0 Amps,  
 $\pm 12$  Vdc @ .7 Amps,  $\pm 15$  Vdc @ .7 Amps

Temperature: 0°C to 50°C (to 70°C with derating)

Overcurrent Protection: Automatic current limit

## PERFORMANOMICAL



Circle No. 18

# A Good Line To Plug Into Standard Power Supplies

The **SWS 750 Series** is the all-new line of efficient, fail-safe switching regulated DC power supplies designed for industrial/commercial operations.

**General Specifications:**

Input Voltage: 115 Vac, 47/63 Hz and 230 Vac on SWS 751 models

Regulation: Line 0.1%, Load 0.2%


Outputs: 5, 12, 15, 24, 28 Vdc

Wattage: 750 Watts


Temperature Coefficient: .02% C°

Overcurrent Protection: Automatic current limiting

## SWITCHERS

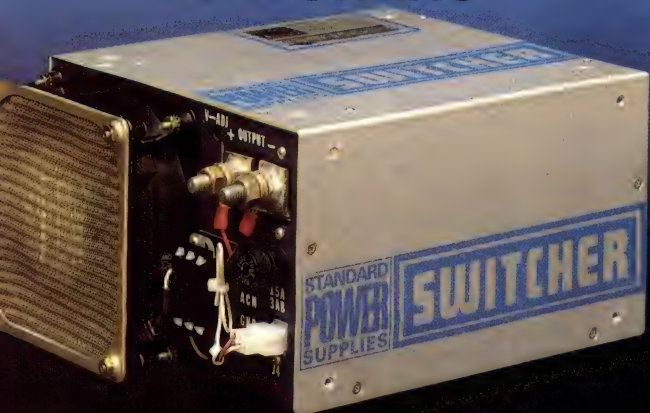

Circle No. 262

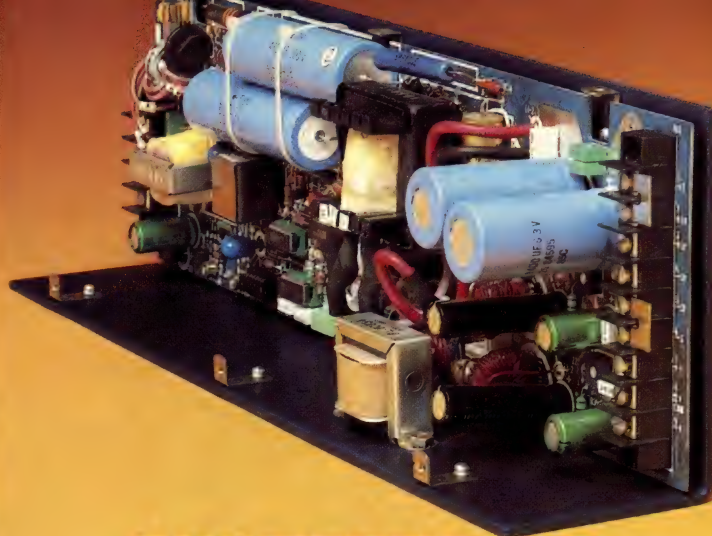

## MULTIEFFICIENT

The **SWS 250T Series** switching regulated DC power supplies offer high efficiency with maximum reliability and performance plus multiple output versatility.

**General Specifications:**

Input Voltage: 115/230 Vac  $\pm 15\%$ ; 47/440 Hz

Regulation: Line 0.1%, Load 0.2%


Outputs: 5Vdc at 25A; + and - 12 Vdc or 15Vdc at 4A; with  
-5Vdc at 1A on Q Models

Wattage: 250 Watts max output power

Temperature Coefficient: 0.2% C°

Overload Protection: Fold back current limit

Circle No. 263

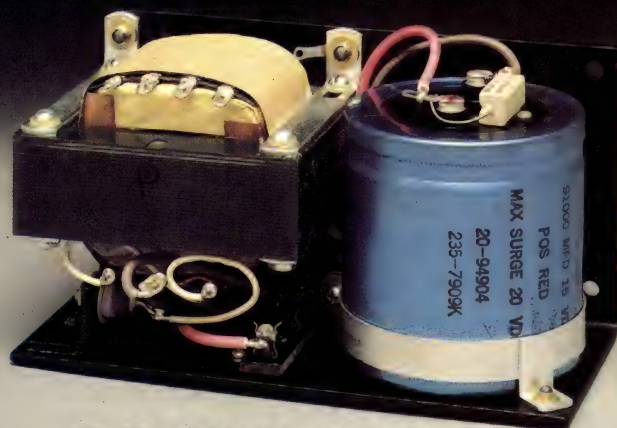

## REGULATIONLESS

The "**Black Line**" is a low-cost alternative for applications where regulation is not needed.

**General Specifications:**

Input Voltage: 115 Vac, 50/60 Hz  
Unregulated

Voltage Range: 7 to 250 Vdc

Wattage Range: 15 to 750 Watts

Temperature Rating: 0° to 50°C (to 70° with derating)

Overcurrent Protection: Fuse

**Standard Power, Incorporated**

Eastern Regional Office

23 Green St., Suite 204

Huntington, L.I.

New York 11743

(516) 549-5104

General Offices and Plant

1400 South Village Way

Santa Ana, California 92705

(714) 558-8512

TWX: 910-595-1760

To find the location of a Standard Power distributor

call (800) 854-6815. For other information call


(714) 558-8512. California residents call (714) 558-8512

Circle No. 264

**STANDARD  
POWER  
SUPPLIES**



# INTEL SPECIAL REPORT

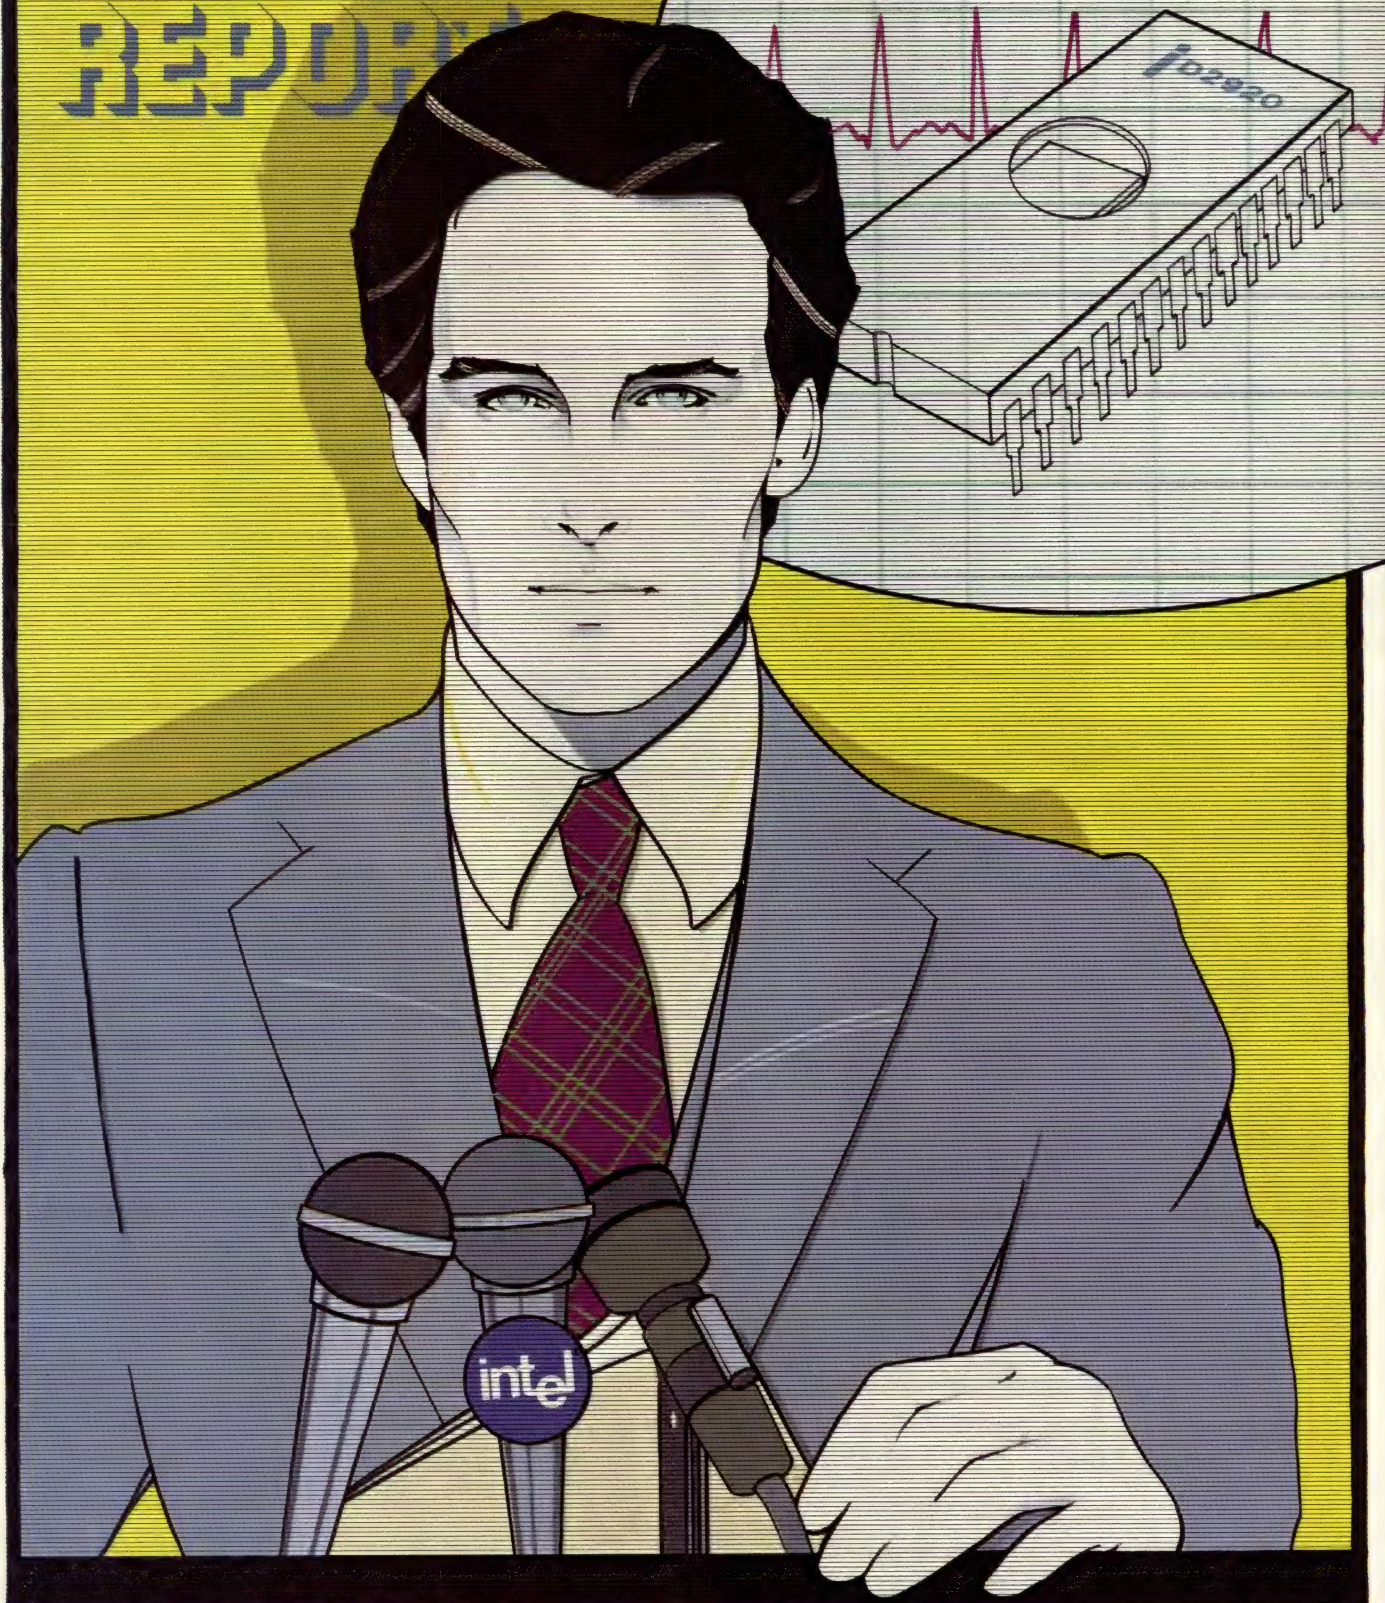



# LSI Breakthrough for Analog

## Intel announces the 2920 Signal Processor, first general purpose, real-time system on a chip.

Good news for analog designers. Intel breaks a new barrier in microelectronics: The first intelligent chip powerful enough to process analog signals in real time. Plus a computer-aided development package to help speed your systems to market faster than ever before.

Intel's 2920 is a complete, micro-sized signal processing system that packs the equivalent of over 18,000 transistors on a single chip. It operates hundreds of times faster than current digital processors. And best of all, the 2920 allows designers to *program* system values quickly, instead of having to match and tweak components.

### A revolution in analog design

From the beginning, LSI technology has helped designers achieve dramatic improvements in product size, design cycles and manufacturing economics. But until now, the speed and complexity of analog processing has stood in the way of general purpose, single chip solutions for real-time applications.

Today, Intel's 2920 Signal Processor brings the power and flexibility of LSI to the analog world. Because of its size, the 2920 can fit in spaces too compact for traditional analog solutions. Because the 2920 is programmable, product development and time-to-market are speeded significantly. Finally, because the 2920 is a solid state device produced with Intel's proven NMOS process, reliability and manufacturing repeatability are

assured to a degree not possible with previous methods.

### Micro-processing for the real world

Applications for the 2920 are as broad as your imagination. Since analog designers can program the 2920 processor to perform a large number of standard building block functions, the chip can be used as an entire subsystem. Implement such functions as complex filtering, waveform generation, modulation/demodulation, adaptive processing, and even non-linear functions. This broad capability makes the 2920 an ideal single chip solution for virtually any application in the DC to 10 kHz range.

And like the digital microprocessor, the 2920 is destined to create entirely new classes of applications: products that are smaller, simpler, and less costly to produce. It gives a competitive advantage to companies in such areas as process control, test

far less complex than the component matching it replaces. Most importantly, Intel provides the complete support tools and design workshops you need to start designing 2920 systems today.

Our SP20 Support Package and Intel's Intellec® Microcomputer Development System allow you to develop and debug by simulating your system in software. Just program functions according to your system schematic, then specify input and operating values. Together, Intel's development aids let you see how your system will work before you even build a prototype. Best of all, because you develop in digital code, your prototype system will be duplicated precisely in manufacturing.

### Start making news with your product


Everything you need to begin designing a new generation of real-time analog processing systems is here today: Intel's 2920 Signal

Processor, SP20 Support Package, and the Intellec Development System. For detailed information, including our new 2920 brochure, plus a schedule of Intel's nationwide 2920 Design Workshops and Seminars, contact your local Intel sales office or distributor. Or write

Intel Corporation, Literature Department, 3065 Bowers Avenue, Santa Clara, CA 95051. Or call (408) 987-8080.

## intel® delivers.

Europe: Intel International, Brussels, Belgium. Japan: Intel Japan, Tokyo. United States and Canadian distributors: Arrow Electronics, Alliance, Almac/Strom, Component Specialties, Cramer, Hamilton/Avnet, Harvey, Industrial Components, Pioneer, Wyle/Eimar, Wyle/Liberty, L.A. Varah and Zentronics.

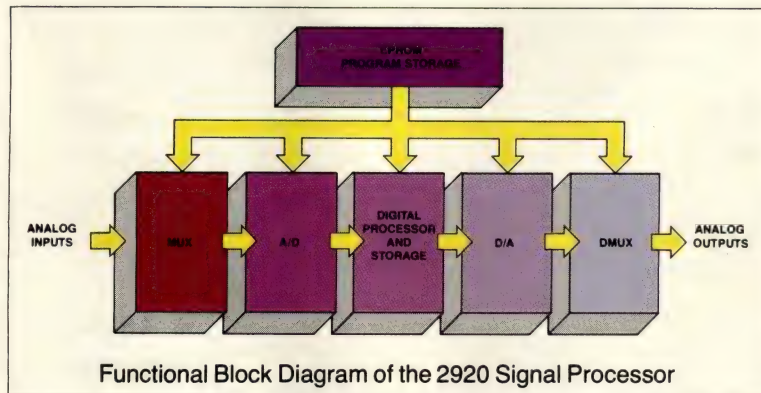

and instrumentation, guidance or control systems, telecommunications, speech processing, and seismic or sonar signal processing.

### How the 2920 simplifies system development

Programming Intel's 2920 Signal Processor is fast and easy to learn —

For more information, Circle No 19



# There's a little something in this Panasonic switcher the other guys wish they had: a Panasonic IC

To begin with, switchers with IC control circuits are reliable switchers. Reliable because there are fewer components – and fewer connections – than power supplies made with only discretes.

But Panasonic switchers don't stop there. We use our own IC, designed and built for us by our parent company. It holds pulse width modulation, operational amplifier, reference voltage, oscillator and several protective circuits. More important, it permits us to design switchers which operate effectively in the lower power ranges.


Four families of modular Panasonic switching power supplies cover a wide range of applications. All feature IC construction, and combine overcurrent safeguards with overvoltage protection

to provide efficiencies up to 84%. In other words, all carry the quality-plus that Panasonic is known for. To find out what for information today: Panasonic Company, Electronic Components Division, One Panasonic Way, Secaucus, NJ 07094; or call (201) 348-7283.

Series	Type	Power Ratings (W)	Output Voltages (VDC)
G	Single-input	25, 50, 100, 150	+5 to +24
H	Dual-input	125, 250, 375	+2 to +24
M	Triple-output	40, 70, 120	Combinations from -15 to +15
E	Single-input	25, 50, 100, 150	+5 to +24

**Panasonic®**  
just slightly ahead of our time

For more information, Circle No 20

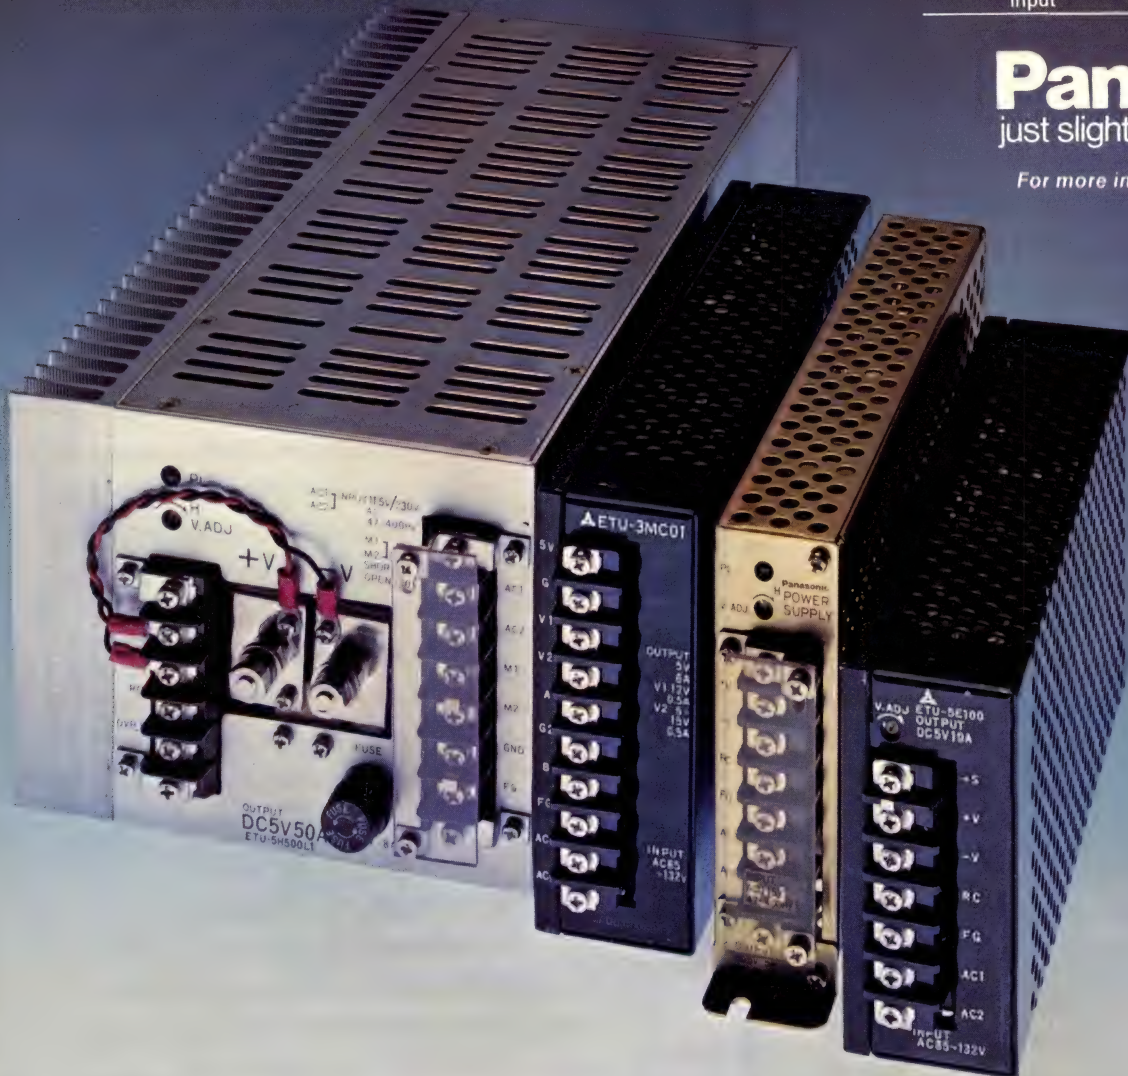



# Technology News


## Dot/bar-display-driver ICs aid analog-meter replacement

**Jim McDermott,**  
Special Features Editor


Recently developed LSI chips incorporate in a single package the complex sensing circuitry and elements required for driving light-bar and dot displays, which are rapidly supplanting analog meters in automotive, consumer and instrumentation applications. Such bar/dot displays represent the magnitude of an analog quantity as the length of a vertical or horizontal string of lighted LEDs or vacuum-fluorescent (VF) bars or dots. (In an alternative configuration, a single lighted dot travels along a graduated scale.)

In an analog meter, the current through a moving-coil element converts an input into a pointer movement that denotes a scale value. The new class of comparator/drivers perform the same function for the LED or VF displays—they convert an analog input into a quantity represented by a particular number of lighted elements (or the apparent location change of one such element). Some drivers have enough current capacity to light small incandescent bulbs.

Bar/dot displays find use in such applications as 32-bar VF fuel gauges in some of Ford's 1980-model autos, as well as in volume-unit (VU) meters on stereo receivers and amplifiers and instruments such as the audio spectrum analyzer manufactured by Audio Developments International. (The Palo Alto, CA firm's equipment incorporates 10 vertical-bar graphs consisting of 20 LEDs each.) And in the latest radio receivers, a traveling lighted red or green dot controlled by one of the driver chips

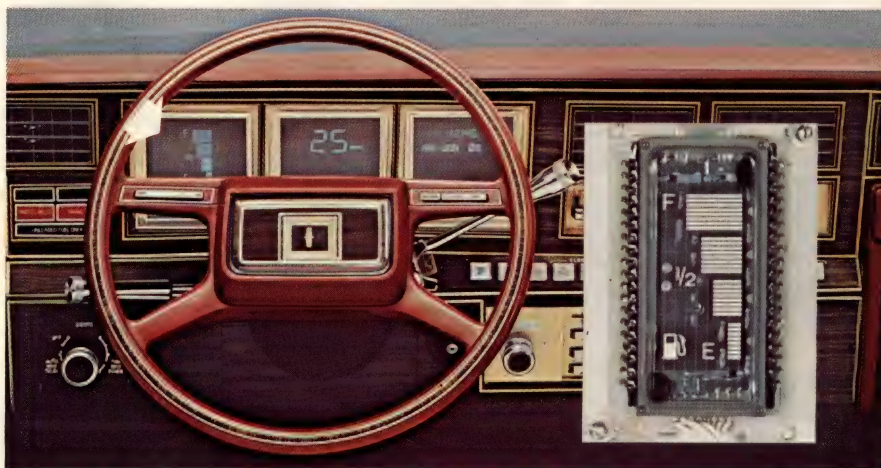

**Analog-sensor and bar-element-driver ICs control vacuum-fluorescent (VF) display devices like the 32-bar VF fuel gauge shown in the inset and used in several 1980 Ford car models (arrow). When the tank is full, all 32 elements glow a bright green, but as fuel is used, the bars darken sequentially, from the top down.**

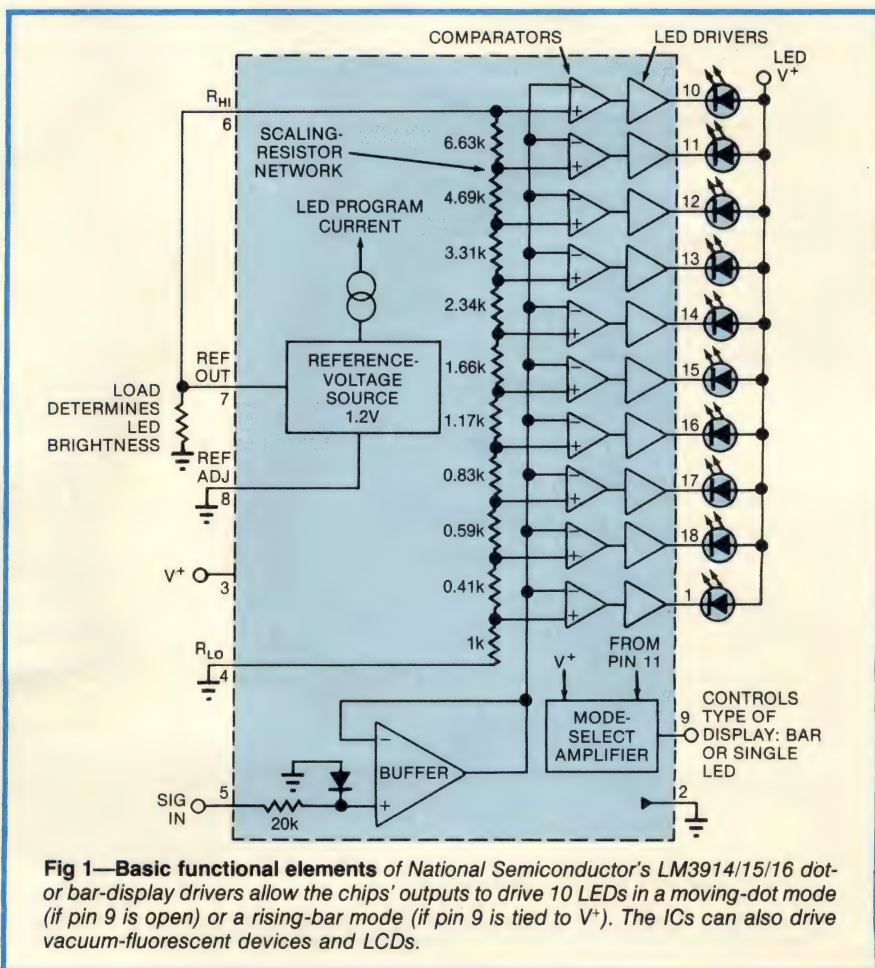

**Fig 1—Basic functional elements of National Semiconductor's LM3914/15/16 dot or bar-display drivers allow the chips' outputs to drive 10 LEDs in a moving-dot mode (if pin 9 is open) or a rising-bar mode (if pin 9 is tied to V+). The ICs can also drive vacuum-fluorescent devices and LCDs.**



# Technology News

replaces a mechanical tuning pointer.

## Comparators: key components

A bar/dot-driver chip is essentially a string of voltage comparators or differential amplifiers, each having one of its two inputs (+) connected to sequential taps on a scaling voltage-divider network (Fig 1). The other inputs (-) connect in parallel to the chip's analog-signal-input terminal.

The bias from the resistor network is proportioned to give each of these comparators a successively higher "turn-on" threshold value than that of the preceding stage. With zero input, all of the comparators are in a cut-off state, and no driver output is available. But as the input voltage rises, it sequentially exceeds the threshold values of each of the individual stages, and the comparators switch, one by one, until the input reaches or exceeds its maximum level. The comparators in

turn activate drivers that turn LED or VF elements on in the same sequence.

As the input voltage drops, the process reverses, and the lighted elements turn off one by one. The divider-string resistances can be proportioned to produce a linear output function or a logarithmic or other nonlinear relationship.

## Temperature a key parameter

The values of the diffused resistors in the comparator scaling networks of the driver ICs are highly temperature sensitive: Over the devices' operating-temperature range, they can vary by as much as 30%. However, because all the resistances vary proportionally and have identical temperature coefficients, the resistor ratios' close tolerances provide a reference with better accuracy and tracking capability over temperature than a 1% external discrete network.

The reference voltage applied to a driver IC's comparator network

proves important because it determines the height of the voltage-threshold levels at which the comparators change state—and thus the chip's input response. A driver IC can thus accommodate a broad range of input signals by means of a simple setting of the reference voltage to the input's full-scale value. The device's supply voltage establishes the maximum allowable input, while the input's minimum value depends on the minimum threshold values at which the comparators can change state.

## Features vary

While all of the analog-to-discrete-level driver chips incorporate comparators, their other features differ. One obvious difference lies in the number of dots and bars you can drive with a chip, which varies from five to 16 (table).

To form larger arrays, you can stack two or more driver chips in sequence, and circuitry in some of the chips simplifies this procedure.

BAR/DOT DISPLAY DRIVERS

MANUFACTURER	PART NO	DISPLAY ELEMENTS			METER APPLICATION	SCALE	NOMINAL SUPPLY VOLTAGE (V)	FULL-SCALE INPUT-SIGNAL RANGE (V)	NO OF PINS	PRICE (\$) (100 QTY)
		NO	LED	VF						
EXAR	XR-2276	12		BAR	VU LEVEL	-20 TO +8 dB	12 TO 18	4.5 TO 5.5	16	2.00
HITACHI	HA12010	12		BAR	LINEAR (VU) <sup>2</sup>	-20 TO +8 dB	12 TO 24	3.00	16	1.77
	HA12019	12		BAR	VU LEVEL	-20 TO +8 dB	12 TO 24	3.77	16	1.77
NATIONAL SEMICONDUCTOR	LM3914	10	BAR	BAR	LINEAR	10 STEP	3 TO 18	1.2 TO 12	18	2.65
	LM3915		OR	OR	LOG	3 dB/STEP	3 TO 18	1.2 TO 12	18	2.65
	LM3916		DOT	DOT	VU LEVEL	-20 TO +3 dB	3 TO 18	1.2 TO 12	18	2.65
SANYO	LB1405	5	BAR		VU LEVEL	-15 TO +2 dB	4.4 TO 12	2.8	16	0.82
	LB1415	5	BAR		VU LEVEL	-10 TO +6 dB	4.4 TO 12	2.8	16	0.82
	LB1409	9	BAR		LOG (-18/+3) <sup>2</sup>	3 dB/STEP	5.5 TO 16	2.8	16	1.02
	LB1416	5	BAR		VU LEVEL	-10 TO +6 dB	5.5 TO 16	2.8	14	0.88
	LB1426	5	BAR		VU LEVEL	-10 TO +6 dB	5.5 TO 16	2.8	14	0.88
	LB1470	16			SPOT TUNING	LINEAR	9 TO 14	1.2 TO 8	22	1.83
	LB1473	16	DOT		SPOT TUNING	LINEAR	9 TO 14	1.2 TO 8	22	1.85
SHARP	IR-2406	12	BAR		LINEAR	12 STEP	8 TO 16	5.5 TO 6	22	2.00
	IR-2431	12	BAR		LOG	-44 TO 0 dB	8 TO 16	5.5 TO 6	22	2.00
	IR-2432	12	BAR		VU LEVEL	-20 TO +6 dB	8 TO 16	0.6 TO 1.6	22	2.00
	IR-2433	12	BAR		LINEAR	12 STEP	8 TO 16	5.5 TO 6	22	2.00
SIEMENS	UAA 17C	16	DOT		LINEAR	16 STEP	10 TO 18	1.4 TO 4	16	2.49
	UAA 170L	16	DOT		SPOT TUNING	LOG SCALE	10 TO 18	1.4 TO 4	16	2.49
	UAA 180	12	BAR		LINEAR	12 STEP	10 TO 18	1.4 TO 4	16	2.49
TELEFUNKEN	U237B <sup>3</sup>	5	BAR		LINEAR	5 STEP	12 TO 18	1.0	8	2.50
	U247B	5	BAR		LINEAR	5 STEP	12 TO 18	0.9	8	2.50
	U257B	5	BAR		VU LEVEL	-15 TO +6 dB	12 TO 18	2.0	8	2.50
	U267B	5	BAR		VU LEVEL	-20 TO +3 dB	12 TO 18	1.4	8	2.50
TEXAS INSTRUMENTS	TL487	5	BAR		LOG	3 dB/STEP	10 TO 18	1.0	8	0.65
	TL489	5	BAR		LINEAR	5 STEP	10 TO 18	0.5 TO 2	8	0.65
	TL480	10	BAR		LOG	2 dB/STEP	10 TO 18	1.0	14	1.24
	TL481	10			LOG	2 dB/STEP	10 TO 18	1.0	14	1.51
	TL490	10	BAR		LINEAR	10 STEP	10 TO 18	1.6	16	1.08
	TL491	10		BAR	LINEAR	10 STEP	10 TO 18	2.0	16	1.22

### NOTES

1. RANGE OVER WHICH INPUT SIGNAL CAN BE EXTERNALLY ADJUSTED.
2. FOR LINEAR LOGARITHMIC INCREMENTS IN VU-METER DISPLAY. STANDARD VU LEVELS ARE BASED ON AUDITORY RESPONSE AND HAVE NONLINEAR LOG INCREMENTS.
3. U237B/247B OR U257B/267B ARE PAIRED FOR 10-LED METER APPLICATIONS.



# Technology News

Additionally, some chips incorporate on-board voltage references to energize the scaling resistance-divider string, while others are driven from external sources. Some provide controlled constant-current sources to limit LED current, while

others require external resistors for this purpose. And there are additional differences as well.

## Linear, log, or VU readouts

One valuable feature that National Semiconductor has de-

signed into its LM3914/15/16 10-element-driver series is the ability to use the devices in both traveling-dot and multiple-dot-bar modes (Fig 1). For the traveling-dot configuration, you leave a mode-select pin (9) open; for the bar mode, you tie this pin to the positive-supply-voltage pin (3).

The comparator voltage-divider networks in the National chips are proportioned to provide linear, log or VU-scale readouts. Specifically, the LM3914 is a 10-step linear driver, the 3915 has a 30-dB logarithmic-scale range of 10 3-dB steps and the 3916 provides a 10-bar LED or VF version of the familiar -20 to +3 VU (dB) volume-level meter.


These three 18-pin, \$2.65 (100) ICs furnish millivolt accuracy at each of the comparator trip points and can operate from a 3 to 20V supply, with a typical standby current (all LEDs OFF) of 1.6 mA. A low (3V) operating voltage provides maximum chip efficiency when driving LEDs in battery-operated equipment—all other competitive drivers (except for some Sanyo chips) require a minimum of 8 to 12V.

Another desirable feature of the National ICs (eliminating the cost of current-limiting resistors for the LEDs) is an on-board constant-current source that controls the output of the open-collector transistors driving the LEDs. You program this source by connecting a resistor between pin 7 and ground.

Approximately 10 times the pin 7 resistor current flows through the LEDs; by varying the resistance with a second signal (such as from a phototransistor), you can modulate LED brightness with a time-varying function (or with another variable) to provide novel types of displays.

You can utilize the National chips with high-impedance inputs because their input buffer amplifiers have a guaranteed 50-nA max input current. For applications involving driving VF displays, the driver-

*Continued on pg 51*

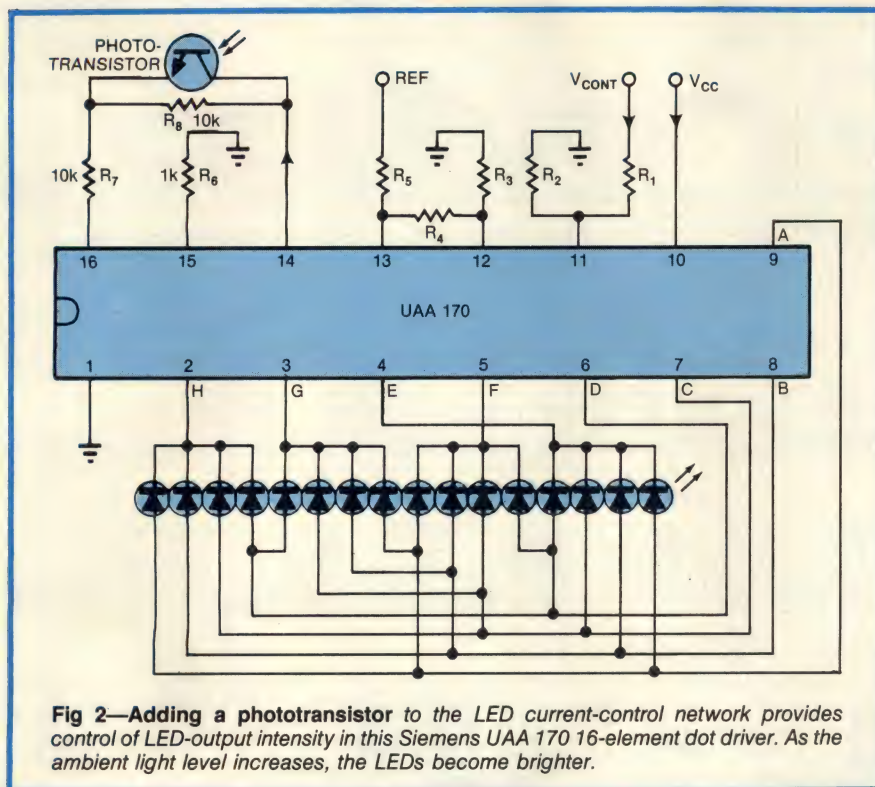

**Fig 2—Adding a phototransistor to the LED current-control network provides control of LED-output intensity in this Siemens UAA 170 16-element dot driver. As the ambient light level increases, the LEDs become brighter.**



**The relative intensities of spectral components in a 31.5-Hz to 16-kHz audio-frequency band correspond to the heights of the red-LED bar-graph columns in this spectrum analyzer from Audio Developments International. Each column consists of two 10-element Litronix RGB-1000 stackable modules.**



# The largest selection of "OFF-THE-POWER SPLITTER

2-way to 24-way, 0°, 90°, 180°, pin or connector models . . . Mini-Circuits offers a wide variety of Power Splitters/Combiners to choose from, with immediate delivery. But there are always "special" needs for "special applications" . . . higher isolation, SMA and Type N connectors intermixed, male connectors or wider bandwidths. Contact us. We can supply them at your request . . . with rapid turnaround time.


## BASIC CASE STYLES




### TWO-WAY 0° (2 kHz — 4200 MHz)



### TWO-WAY 90° (12 — 180 MHz)



### TWO-WAY 180° (10 kHz — 500 MHz)



### THREE-WAY 0° (0.01 — 750 MHz)




### FOUR-WAY 0° (2 kHz — 1000 MHz)




### SIX WAY 0° (1 — 175 MHz)



### EIGHT-WAY 0° (0.5 — 700 MHz)



### SIXTEEN-WAY 0° (0.5 — 125 MHz)



### TWENTY-FOUR-WAY 0° (0.2 — 100 MHz)



## DISTRIBUTORS—USA

METROPOLITAN NEW YORK  
NORTHERN NEW JERSEY  
WESTCHESTER COUNTY  
Microwave Distributors  
61 Mall Drive  
Commack, NY 11725  
(516) 543-4771

SO. NEW JERSEY, DELAWARE  
& EASTERN PENNSYLVANIA  
MLC Distributors  
456 Germantown Pike  
Lafayette Hill, PA 19444  
(215) 825-3177

SO. CALIFORNIA  
Crown Electronics  
11440 Collins Street  
N. Hollywood, CA 91601  
(213) 877-3550

NORTHERN CALIFORNIA  
Pen Stock  
105 Fremont Avenue  
Los Altos, CA 94022  
(415) 948-6533



# SHELF" COMBINERS

Over 80 models covering  
2 kHz to 4.2 GHz

FROM **\$7.95**

● ● ● (500 pieces) \$9.95 (6-49)

For complete specifications and performance curves, refer to  
1979-80 MicroWaves Product Data Directory pages 161-369, or 1979 EEM pages 2770-2970.

## SELECT THE MODEL YOU NEED

Model	Freq. range (MHz)	Min. isol.-dB (Mid- band)	Max. insert. loss-dB (Mid- band)	See notes below	Price (Qty.)
<b>2-WAY 0°</b>					
PSC-2-1	0.1-400	20	0.75		\$9.95 (6-49)
PSC-2-1W	1-650	20	0.9		\$14.95 (6-49)
PSC-2-2	0.002-60	20	0.6		\$19.95 (6-49)
PSC-2-1-75	0.25-300	20	0.75	1	\$11.95 (6-49)
PSC-2375	55-85	25	0.5	1	\$19.95 (6-24)
PSC-2-4	10-1000	20	1.2		\$19.95 (6-49)
MSC-2-1	0.1-450	20	0.75		\$16.95 (5-24)
MSC-2-1W	2-650	25	0.8		\$17.95 (5-24)
ZSC-2-1	0.1-400	20	0.75	3	\$27.95 (4-24)
ZSC-2-1-75	0.25-300	20	0.75	1,3	\$29.95 (4-24)
ZSC-2-1W	1-650	20	0.8	3	\$32.95 (4-24)
ZSC-2-2	0.002-60	20	0.6	3	\$37.95 (4-24)
ZSC-2375	55-85	25	0.5	3	\$37.95 (4-24)
ZMSC-2-1	0.1-400	20	0.75	4	\$37.95 (4-24)
ZMSC-2-1W	1-650	20	0.8	4	\$42.95 (4-24)
ZMSC-2-2	0.002-60	20	0.6	4	\$47.95 (4-24)
ZFSC-2-1	5-500	20	0.6	5	\$31.95 (4-24)
ZFSC-2-1W	1-750	20	0.8	5	\$35.95 (4-24)
ZFSC-2-2	10-1000	20	1.0	5	\$39.95 (4-24)
ZFSC-2-4	0.2-1000	20	1.0	5	\$44.95 (4-24)
ZFSC-2-5	10-1500	20	1.0	5	\$49.95 (4-24)
ZFSC-2-6	0.002-60	20	0.6	5	\$36.95 (4-24)
ZFSC-2-6-75	0.004-60	20	0.8	5	\$38.95 (4-24)
ZAPD-1	500-1000	19	0.6	6	\$39.95 (1-9)
ZAPD-2	1000-2000	19	0.6	6	\$39.95 (1-9)
ZAPD-4	2000-4000	19	0.8	6	\$39.95 (1-9)

<b>2-WAY 90°</b>					
PSCQ-2-13	12-14	25	0.7†	2	\$12.95 (5-49)
PSCQ-2-14	12-16	25	0.6†	2	\$16.95 (5-49)
PSCQ-2-40	23-40	18	0.7†	2	\$16.95 (5-49)
PSCQ-2-50	25-50	20	0.7†	2	\$19.95 (5-49)
PSCQ-2-90	55-90	20	0.7†	2	\$19.95 (5-49)
PSCQ-2-180	120-180	15	0.7†	2	\$19.95 (5-49)
ZSCQ-2-50	25-50	20	0.7†	2,3	\$39.95 (4-24)
ZSCQ-2-90	55-90	20	0.7†	2,3	\$39.95 (4-24)
ZSCQ-2-180	120-180	15	0.7†	2,3	\$39.95 (4-24)
ZMSCQ-2-50	25-50	20	0.7†	2,4	\$49.95 (4-24)
ZMSCQ-2-90	55-90	20	0.7†	2,4	\$49.95 (4-24)
ZMSCQ-2-180	120-180	15	0.7†	2,4	\$49.95 (4-24)

<b>2-WAY 180°</b>					
PSCJ-2-1	1-200	25	0.8		\$19.95 (5-49)
PSCJ-2-2	0.01-20	25	0.5		\$29.95 (5-49)
ZSCJ-2-1	1-200	25	0.8	3	\$37.95 (4-24)
ZSCJ-2-2	0.01-20	25	0.5	3	\$47.95 (4-24)
ZMSCJ-2-1	1-200	25	0.8	4	\$47.95 (4-24)
ZMSCJ-2-2	0.01-20	25	0.5	4	\$57.95 (4-24)
ZFSCJ-2-1	1-500	25	1.5	5	\$49.95 (4-24)
ZFSCJ-2-3	5-300	25	1.5	5	\$39.95 (4-24)

1. 75 ohms impedance
2. Average of coupled outputs less 3 dB
3. BNC connectors standard, TNC available
4. SMA connectors only
5. BNC connectors standard, TNC available, SMA & Type N available at \$5 additional cost
6. BNC, TNC, SMA & Type N at \$5 additional cost. Please specify connectors.
7. TNC, SMA & Type N at \$5 additional cost. Please specify connectors.
8. SMA connectors standard, BNC on request.
9. BNC connectors standard, TNC available, SMA available at \$15 additional cost

Model	Freq. range (MHz)	Min. isol.-dB (Mid- band)	Max. insert. loss-dB (Mid- band)	See notes below	Price (Qty.)
<b>3-WAY 0°</b>					
PSC-3-1	1-200	25	0.7		\$19.95 (5-49)
PSC-3-1W	5-500	15	1.4		\$29.95 (5-49)
PSC-3-1-75	1-200	25	0.7	1	\$20.95 (5-49)
PSC-3-2	0.01-30	25	0.45		\$29.95 (5-49)
PSC-3-13	1-200	35	0.6		\$24.95 (5-49)
ZSC-3-1	1-200	25	0.7	3	\$37.95 (4-24)
ZSC-3-1-75	1-200	25	0.7	1,3	\$38.95 (4-24)
ZSC-3-2	0.01-30	25	0.45	3	\$47.95 (4-24)
ZSC-3-2-75	0.02-20	25	0.6	1,3	\$48.95 (4-24)
ZMSC-3-1	1-200	25	0.7	4	\$47.95 (4-24)
ZMSC-3-2	0.01-30	25	0.45	4	\$57.95 (4-24)
ZFSC-3-1	1-500	20	0.9	5	\$39.95 (4-24)
ZFSC-3-1W	2-750	20	1.0	5	\$41.95 (4-24)
ZFSC-3-13	1-200	35	0.6	5	\$39.95 (4-24)

<b>4-WAY 0°</b>					
PSC-4-1	0.1-200	20	0.75		\$28.95 (6-49)
PSC-4-1-75	1-200	20	0.9	1	\$24.95 (6-49)
PSC-4-3	0.25-250	20	0.75		\$23.95 (6-49)
PSC-4A-4	10-1000	15	1.1		\$49.95 (6-49)
PSC-4-6	0.01-40	25	0.5		\$29.95 (6-49)
ZSC-4-1	0.1-200	20	0.75	3	\$46.95 (4-24)
ZSC-4-1-75	1-200	20	0.8	1,3	\$46.95 (4-24)
ZSC-4-2	0.002-20	25	0.5	3	\$69.95 (4-24)
ZSC-4-3	0.25-250	20	0.75	3	\$43.95 (4-24)
ZMSC-4-1	0.1-200	20	0.75	4	\$56.95 (4-24)
ZMSC-4-2	0.002-20	25	0.5	4	\$79.95 (4-24)
ZMSC-4-3	0.25-250	20	0.75	4	\$53.95 (4-24)
ZFSC-4-1	1-1000	18	1.5	8	\$89.95 (1-4)
ZFSC-4-1W	10-500	20	1.5	8	\$74.95 (1-4)
ZFSC-4375	50-90	30	1.2	1,8	\$89.95 (1-4)

<b>6-WAY 0°</b>					
PSC-6-1	1-175	18	1.0		\$68.95 (1-5)
ZFSC-6-1	1-175	20	1.2	9	\$89.95 (1-4)

<b>8-WAY 0°</b>					
PSC-8-1	0.5-175	20	1.1		\$68.95 (1-5)
PSC-8-1-75	0.5-175	20	0.8	1	\$69.95 (1-5)
PSC-8A-4	5-500	18	1.8		\$89.95 (1-5)
PSC-8-6	0.01-10	23	1.1		\$79.95 (1-5)
ZFSC-8-1	0.5-175	20	1.1	10	\$89.95 (1-4)
ZFSC-8-1-75	0.5-175	20	1.0	1,10	\$90.95 (1-4)
ZFSC-8375	50-90	25	1.3	1,10	\$119.95 (1-4)
ZFSC-8-4	0.5-700	20	1.5	10	\$129.95 (1-4)
ZFSC-8-6	0.01-10	23	1.1	10	\$109.95 (1-4)

<b>16-WAY 0°</b>					
ZFSC-16-1	0.5-125	18	1.6	11	\$174.95 (1-4)

<b>24-WAY 0°</b>					
ZFSC-24-1	0.2-100	20	2.0	12	\$264.95 (1-4)

10. BNC connectors standard, TNC available at \$10 additional cost, SMA at \$25 additional cost.
11. BNC connectors standard, TNC available at \$20 additional cost, SMA available at \$45 additional cost.
12. BNC connectors standard, TNC available at \$35 additional cost, SMA available at \$65 additional cost.

World's largest manufacturer of Double-Balanced Mixers

**Mini-Circuits**

A Division of Scientific Components Corp.

2625 East 14th St Brooklyn, N.Y. 11235 (212) 769-0200 Domestic and International Telex 125460 International Telex 620156

B43-2/REV B


For more information, Circle No 21



# MOD POT...Number 1<sup>®</sup> with more combinations than all others combined.

MOD POT, the original modular potentiometer—available in over a billion combinations. A whole family of resistive elements: hot-molded composition, cermet, conductive plastic. Variety of switch options, vernier drives with solid or concentric shafts. Single, dual, triple or quadruple section controls. Solder lug or PC pin terminals. Save panel space with  $\frac{5}{8}$ " square module. Fast delivery backed by our distributor assembly centers. Ask for Publication EC5670-2.1.

RESISTANCE ELEMENT	RESISTANCE RANGE	TOLERANCE	TAPERS	POWER RATING (LINEAR TAPER)		
				SERIES 70	SERIES 72	SERIES 73
Hot Molded Composition	50 ohms to 10 megs	$\pm 10\%$ or $\pm 20\%$	Linear (U)	1.0 Watt at 70°C	0.5 Watt at 70°C	0.75 Watt at 70°C
	250 ohms to 10 megs		Modified Log CW (A) or CCW (B)			
Cermet	100 ohms to 5 megs	$\pm 10\%$	Linear (U)	2.0 Watts at 70°C	1.0 Watt at 70°C	2.0 Watts at 70°C
Conductive Plastic	100 ohms to 1 meg	$\pm 10\%$ or $\pm 20\%$	Linear (U)	0.5 Watt at 70°C	0.25 Watt at 70°C	0.5 Watt at 70°C
	500 ohms to 1 meg		Modified Log CW (A) or CCW (B)			

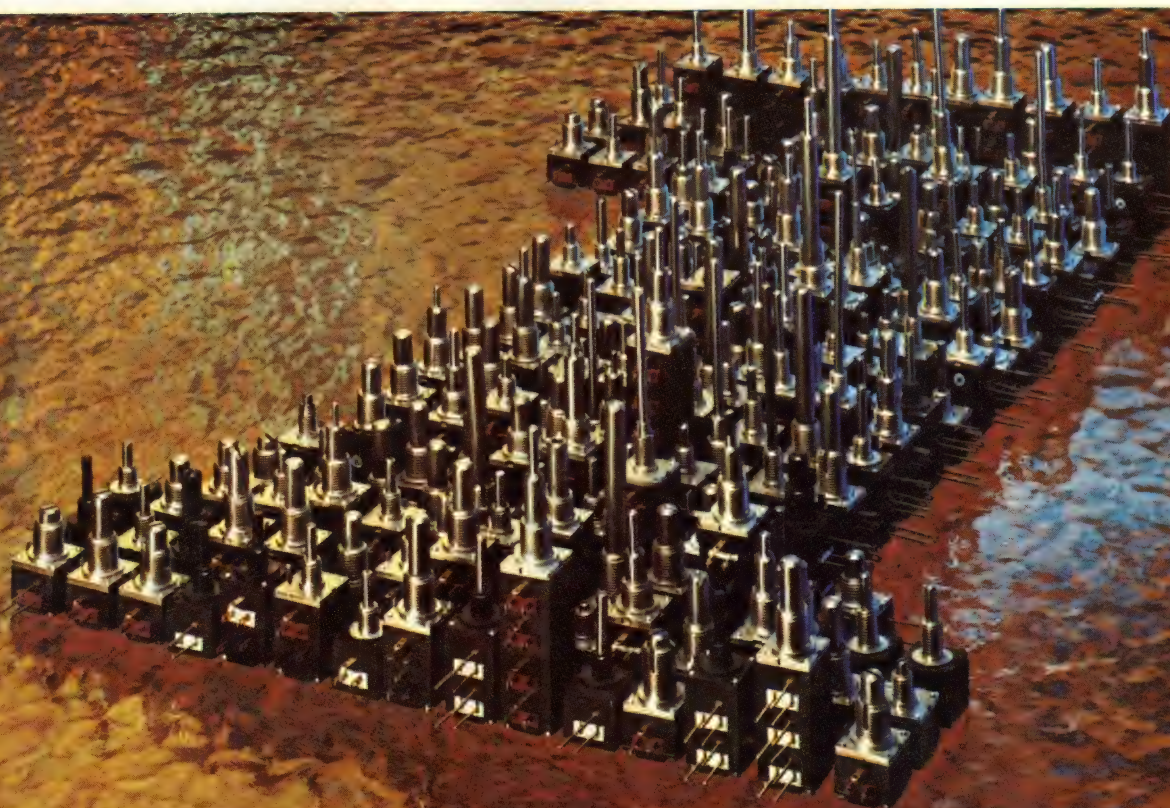

## Quality in the best tradition.



**ALLEN-BRADLEY**

Milwaukee, Wisconsin 53204

Visit A-B

MOD POT Center at  
Electro '80—Booth 2419

For more information, Circle No 22



# Allen-Bradley Appointed Electronic Distributors

## ATLANTA, GA

Wilshire Electronics (404) 923-5750

## BURLINGTON, MA\*

Wilshire Electronics (617) 272-8200

## CHICAGO, IL\*

Newark Electronics (312) 638-4411

## CLEVELAND, OH

Schweber Electronics (216) 464-2970

## COLUMBUS, OH Electronics

Marketing Corporation (614) 299-4161

## DALLAS, TX\* Solid State

Electronics Co. of Texas (214) 438-5700

## DANBURY, CT

Schweber Electronics (203) 792-3500

## DENVER, CO\* Wyle

Distribution Group (303) 287-9611

## EL SEGUNDO, CA\* Wyle

Distribution Group (213) 322-8100

## FAIRFIELD, NJ

Schweber Electronics (201) 277-7880

## FT. WAYNE, IN Ft. Wayne

Electronics Supply, Inc. (219) 423-3422

## GAITHERSBURG, MD

Schweber Electronics (301) 840-5900

## GREENSBORO, NC Hammond

Electronics, Inc. (919) 275-6391

## HOLLYWOOD, FL

Schweber Electronics (305) 927-0511

## HOUSTON, TX\* Harrison

Equipment Co., Inc. (713) 652-4700

## INDIANAPOLIS, IN Graham

Electronics Supply, Inc. (317) 634-8202

## IRVINE, CA\*

Schweber Electronics (714) 556-3880

## IRVINE, CA

Wyle Distribution Group (714) 641-1600

## LIVONIA, MI

Schweber Electronics (313) 525-8100

## LOS ANGELES, CA\* Kierulff

Electronics, Inc. (213) 725-0325

## MILWAUKEE, WI Marsh

Electronics, Inc. (414) 475-6000

## MINNEAPOLIS, MN

Newark Electronics (612) 331-6350

## ORLANDO, FL\* Hammond

Electronics, Inc. (305) 849-6060

## PALATINE, IL Ohm

Electronics, Inc. (312) 359-5500

## PEORIA, IL

Klaus Radio, Inc. (309) 691-4840

## PHILADELPHIA, PA\* Almo

Electronics Corp. (215) 698-4000

## PHOENIX, AZ Kierulff

Electronics, Inc. (602) 243-4101

## ST. LOUIS, MO Olive

Electronics, Inc. (314) 426-4500

## ST. PAUL, MN\* Ragon

Electronics (612) 488-0201

## SAN DIEGO, CA\* Wyle

Distribution Group (714) 565-9171

## SANTA CLARA, CA\* Wyle

Distribution Group (408) 727-2500

## SEATTLE, WA Kierulff

Electronics, Inc. (206) 575-4420

## WESTBURY, NY\*

Schweber Electronics (516) 334-7474

## MONTREAL\* Cesco

Electronics Ltd. (514) 735-5511

## QUEBEC Cesco

Electronics Ltd. (418) 524-4641

## TORONTO Cesco

Electronics Ltd. (416) 661-0220


\*MOD POT® Assembly Centers



**ALLEN-BRADLEY**

Milwaukee, WI 53201

## Technology News

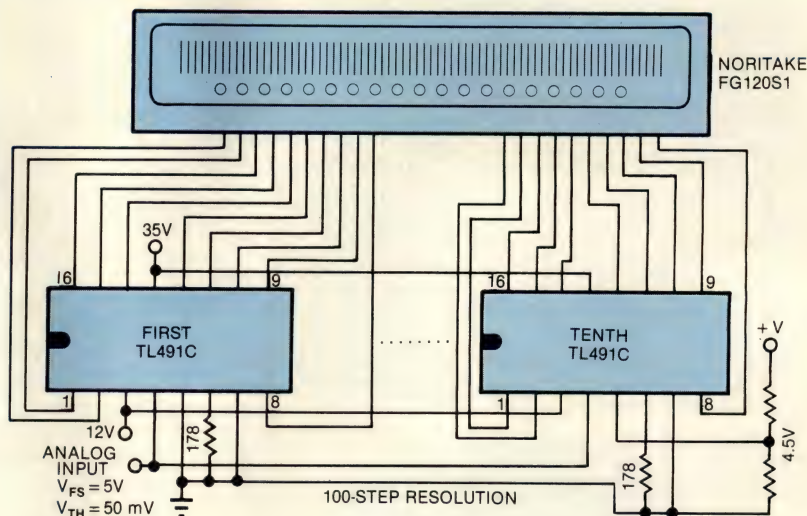

**Fig 3—100-step resolution of an analog input quantity results when you drive a Noritake 100-bar vacuum-fluorescent display with cascaded Texas Instruments 10-step analog detector/drivers. For a 5V full-scale input, each lighted bar represents a 50-mV increment.**

output transistors' collectors can withstand up to 25V.

The 3914/15/16 chips incorporate an adjustable voltage reference, which supplies the potential across the comparator voltage divider and accommodates full-scale inputs of 1.2 to 12V. These inputs are essentially independent of the actual supply voltage. The firm's *Linear Databook* (pg 9-108) describes several types of applications using both single- and multiple-chip drivers for LED displays.

### Dedicated drivers

While the National chips can perform in either traveling-dot or bar-graph modes, other manufacturers have developed dedicated chips for each of these formats. For example, Siemens' UAA 170, designed for use in an electronic tuning dial in varactor-tuned radios and TVs, switches a traveling light spot across an array of 16 LEDs. You can switch all 16 LEDs with a control input that ranges from 1.4 to 4V, depending on the reference (scale) voltage across the voltage-divider resistor string.

But whereas the National devices require 10 pins to drive 10 LEDs, the Siemens parts need only eight to

drive 16—a reduction achieved by passing the outputs of the UAA 170's 16 comparators through a logic matrix controlling eight 50-mA drivers.

Constant-current control of LED drive current (and consequently LED brightness) results from adjusting the current applied to pin 16 by varying the resistance between pins 16 and 14 (a 5V regulated source). By making a phototransistor a part of the control resistance, you can automatically vary the LED intensity over a range of ambient lighting conditions (Fig 2). (You can also employ this technique with other drivers that control LED current similarly.)

In another control function possible with the Siemens chip, you can make a lighted dot either appear to glide smoothly along a scale or advance in abrupt jumps by varying the scale reference voltage (1.4 to 6V) between pins 12 and 13. And if you want a 30-LED scale, you can cascade two of the devices. Furthermore, if your application is a VU-meter display, you can drive 16 LEDs in a semilog scale by employing the UAA 170L.

Providing a linear-bar-type presentation, Siemens' UAA 180 drives



## Your sensitive electronics deserve this extra-strong Hoffman NEMA 12 protection.

What's your enclosure need? Want environmental protection for terminals, instruments, controllers or printed circuit board racks? Hoffman has free-standing enclosures to protect your most delicate circuits from oil, dust, dirt and water environments. Single or double door models. Access from front only, or front and back. Add such accessories as swing-out and side-mounted panels, half-length and full length panels or relay rack angles. And you have literally hundreds of standard stock combinations from which to choose. Optional folding shelf to support test equipment available. Special enclosure sizes, modifications and finishes on request.

**SPECIAL TECHNICAL BROCHURES**—free to qualified design engineers and spec writers. Write for your copy.



**Hoffman**

HOFFMAN ENGINEERING COMPANY  
Division of Federal Cartridge Corporation/Anoka, MN 55303 Dept. ED 79-4.

For more information, Circle No 27

## FAME AND GLORY

If you have an idea for an EDN design feature, send us an outline or call the Editor to discuss your proposal. We pay \$30 per magazine page, upon publication, for every contributed feature article. Call Walt Patstone, 221 Columbus Avenue, Boston, MA 02116. Telephone (617) 536-7780.


## News

12 LEDs, with each diode's current adjustable to 10 mA max. As with the UAA 170, you can vary LED transition smoothness by adjusting the reference voltage. And to obtain an extended scale, you can cascade as many as seven of these devices.

### Floating-point tuners

Sixteen-element dot drivers for LED and VF displays are available from Sanyo Semiconductor and find use as floating-spot tuning indicators in radio and TV receivers. Both of these devices come in 22-pin plastic ICs—the LED (LB1473) and VF (LB470) drivers consist of identical circuitry.

These parts have no on-chip regulated voltage sources for their scaling-resistor networks; a nominal

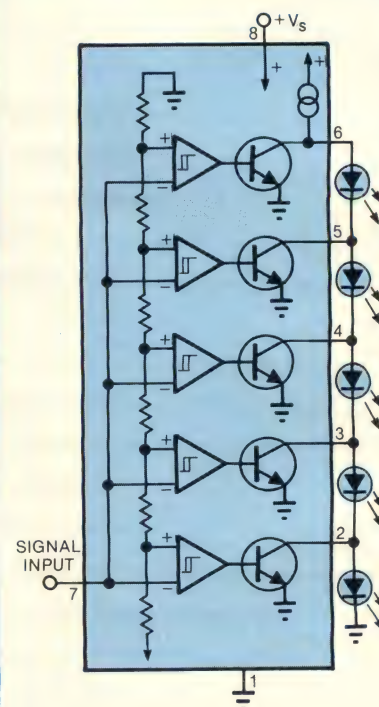

**Fig 4—Low power dissipation** highlights the 8-pin Telefunken LED drivers. It's achieved by passing current through them in series rather than by driving them individually. In the comparators' OFF state, the LED drive current is shunted to ground through turned-on transistors. When the comparators turn on in response to an input signal, the transistors are cut off, and the drive current shunts through the LEDs.



# Now you can add these Mallory QPL capacitors to your approved vendor list.

We want to update you on our capacitors qualified under MIL-C-39003 and MIL-C-39006. In solid electrolyte tantalums we now offer the following:

MIL Style	Mallory Type	Life Failure Rates
CSR 13	TER	M, P, R
* CSR 23	TXE	M, P, R*
* CSR 33	TXR	M, P*
CSR 91	TNR	M, P, R

\* Includes latest failure rate updates.

And in wet (non-solid) tantalums.

MIL Style	Mallory Type	Life Failure Rates
CLR 10	XTM-XTK	L, M, P
CLR 14	XTL-XTH	L, M, P
CLR 17	XTV	L, M, P
CLR 65	TLX	L, M, P, R
CLR 69	TXX	L, M, P

All of these capacitors are available through authorized Mallory distributors. For complete specifications write or call for our new QPL bulletin. Mallory Capacitor Division, Mallory Components Group, P.O. Box 372, Indianapolis, Indiana 46206.  
(317) 636-5353.

**MALLORY**

ELECTRICAL/ELECTRONIC GROUP  
**EMHART**



# MALLORY

For more information, Circle No. 39



# Technology News

8V dc supplies it externally. With this type of display, one of the dots is always ON so long as the radio or TV is in operation. Dot-sweep voltage must thus be 1.2V min; it rises in increments of 0.4V to 8V.

The Sanyo LED-driver chip's maximum supply voltage is 22V. The VF chip, designed to drive a 12V-type VF bar display, has a 16V maximum. Recommended supply voltages for both devices range from 9 to 14V. Additionally, maximum output current for the LED driver equals 18 mA, while that for the VF device is 0.4 mA.

## Bar types more popular

Despite the many uses for such dot-display drivers, LED bar types remain more popular. They find use in applications where the illuminat-

ed elements mount alongside or stack on top of one another.

For example, Sharp offers the IR-2431/32/33 Series 22-pin devices: log-, VU- and linear-scale drivers for its integral 12-element multicolored horizontal-bar LEDs (GL-112 Series), described in the box, "Mating displays with drivers."

The 2431/32/33 drivers require external control of their on-board constant-current supply to limit the LEDs to 14 mA max drive current each. You must also supply the maximum and minimum reference voltages for the high and low ends of the scaling-resistor network. Typical supply voltages for these devices range from 8 to 16V; you can easily cascade them by means of a few external resistors.

A line of six bar-graph drivers

from Texas Instruments includes devices for driving five or 10 display elements. Each IC contains a voltage-comparator string, a buffer-amp input, a reference-voltage regulator, a scaling-resistor network and output-driver transistors; all parts work from a 10 to 18V supply over 0 to 70°C. (This temperature span is typical of most bar/dot-display ICs.)

The 5-output drivers have eight pins and are configured as linear (TL489) or logarithmic (TL487) devices with open-collector output transistors that sink 40 mA and withstand 18V in the OFF state. They drive LEDs or small incandescent bulbs (as well as TTL, CMOS or other high-level logic).

Typical input for the linear driver is 0 to 1000 mV; the comparator

## Mating displays with drivers

If you're incorporating a dot or bar-graph display in your design, note that you can achieve novel visual effects by using individual LEDs configured in nonconventional linear arrays. On the other hand, the easiest approach to display configuration employs packaged arrays. Principal sources of these LED dot and bar-graph elements include Litronix, General Instrument, Hewlett-Packard and Sharp.

Litronix supplies 4- to 10-element red and green dot arrays as well as 10-element bar arrays (BG-1000 Series), the latter packaged in 1-in.-long 20-pin DIPs that you can stack end to end. The bars are on 0.1-in. centers and come in red (RBG-1000), high-efficiency red (OBG-1000), yellow (YBG-1000) and green (GBG-1000). For a 20-mA forward current, these arrays exhibit typical forward voltages of 1.2 (red), 2.2 (high-efficiency red), 2.4 (yellow) and 2.4V (green). Prices are \$2.30 (100) for the RBG-1000 and \$3.15 (100) for the other three units.

General Instrument manufactures a similar end-stackable 10-element bar display, the high-efficiency-red MV57164. Green and yellow versions of the \$3.75 (100) device will be available in production quantities later this year.

Hewlett-Packard offers red, yellow and green rectangular light-bar modules that you can stack side by side or end to end. This HMP-2300/2400/2500 Series comes in two sizes of in-line packages with pins on standard 0.1-in. centers. One package has a 4-diode bar with a 0.75×0.15-in. luminous area; the other incorporates two diodes that illuminate a

0.35×0.15-in. surface.

Sharp's line of 12-element red, yellow or green LED assemblies has the bars aligned horizontally rather than vertically. These red (GL-112R), green (GL-112G), yellow-green (GL-112N) and yellow (GL-112H) units can be driven by Sharp's IR-2400 Series 12-element drivers, described in the text. You can also specify these 12-element bars in combinations like these: nine yellow-green and three red elements (FL-112S); eight yellow-green and four red (GL-112M); four yellow-green, four yellow and four red (GL-112T).


These 12-bar assemblies come in two lengths: one about 2.28 in. and the other about 2.75 in. In-line pins for the devices are on 0.1-in. centers, and each diode has individual connections. Similar 5- (GL-105) and 6-element (GL-106) packages in red, yellow-green and yellow are also available.

Vacuum-fluorescent displays come from three sources: Futaba, NEC America and Noritake (Ise Electronics). Standard products range from audio VU bar-graph meters to 100-element bar graphs. The usual display color is green, although others are available on special order.

LCDs and gas-discharge displays can also be driven by the ICs described in the text. However, the process involves more components and greater circuit complexity, which in general tend to offset the cost advantages and simplicity of the dedicated driver chips.



# 6 NEW AND BETTER WAYS TO BETTER EQUIPMENT DESIGN!

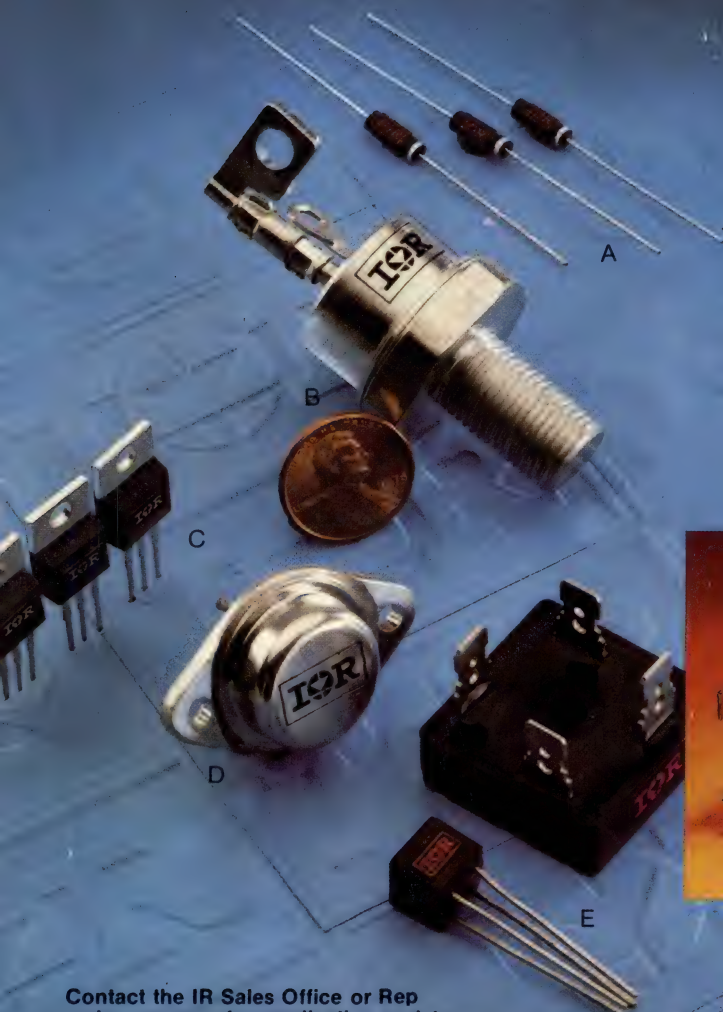

Better answers for  
better performance.

**A. New High Voltage, Fast Recovery Rectifiers** for use in "diode-split" transformers, "multiplier" and "half-wave" extra high voltage power supplies for TV, microwave ovens, CRT displays, photocopiers, etc. Voltages from 3kV to 18kV with a current rating of 20mA.

Circle No. 50

**B. New 50 Amp/450 Volt Bipolar NPN Power Transistors** feature fall times of 200 nanoseconds when switching 50 Amp loads. The extremely fast switching times make the HPT 545 Series applicable to switching regulators and high power inverters for UPS systems and AC motor controllers, where several smaller, paralleled devices may be replaced by a single HPT 545.

Circle No. 51

**C. New low-cost, triple diffused IR 13006 and IR 13007 Power Transistors** solve size and cost problems related to small EDP switching power supplies for data terminals, word processors and copiers. Rated at 8 Amps, 300 or 400 volts, these TO-220AB packaged devices are electrically equivalent and cost competitive with the established Motorola MJE13006/MJE13007

Circle No. 52

**D. New IR6543-5-7 "SUPERSPEC" TO-3 Power Transistors** feature improved turn-off switching times and saturation voltage ratings over JEDEC 2N6543-5-7 devices to optimize switching power supply performance. For example, rise time is 0.6  $\mu$ s vs. 0.7 to 1.0  $\mu$ s for JEDEC types, and fall time is only 0.2  $\mu$ s vs. the JEDEC 0.4  $\mu$ s. Saturation voltage is 0.75V vs. 1.0V to 1.5V for JEDECs. Other SUPERSPEC types with superior switching times include the IR6582 and IR6583, improved versions of the 2N6582-2N6583.

Circle No. 53


**E. Molded Diode Bridges** rated from 1 to 100 Amps include 1 to 3 Amp bridges in three case styles for PC board mounting. U.L. recognized, isolated base "JB" units rated from 10 to 25 Amps with surge ratings up to 300 Amps, and "HB" models for applications in the 80 and 100 Amp range. Send for detailed Selection Guide and Cross Reference to other industry types.

Circle No. 54

## F. Standard Rectifier Assemblies

available off-the-shelf include single and three phase types rated from 15 to 1500 Amps, 400 thru 1200 volts. 85 models. Cost-effective candidates for "make or buy" decisions. Send for Data Sheet PD-7.003 for complete information.

Circle No. 55

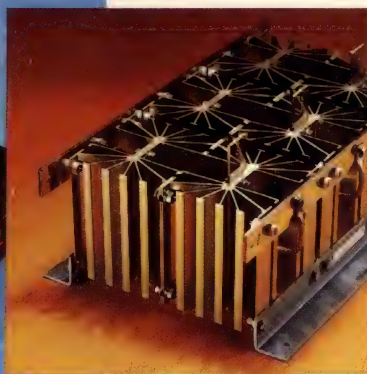

Contact the IR Sales Office or Rep  
in your area for application assistance.  
For price and delivery information,  
contact an IR Distributor near you.

# INTERNATIONAL RECTIFIER

WORLD HEADQUARTERS: 235 KANSAS ST., EL SEGUNDO, CA 90245, U.S.A. PHONE: (213) 772-2000 TELEX: 66-4464

EUROPEAN HEADQUARTERS: HURST GREEN, OXTED, SURREY, ENGLAND. PHONE: 8833-3215. TELEX: 95219


Manufacturing Subsidiaries, Sales Offices, Representatives, Agents and Distributors Throughout the World.





# status Symbols®

The first thing  
pushbutton controls  
indicate is the  
quality of  
your product.



In a world where first impressions mean so much, why settle for esthetically (and functionally) inferior pushbutton switches, when you can choose TH pushbutton controls at competitive prices? TH holds the line on price. AND quality. With TH on your panel you don't have to accept second-class appearance or performance... hot spots, fuzzy legends, tinny-looking bezels, uncoordinated configuration and size and faulty human engineering. TH controls enhance your product.


And, TH gives you complete design freedom. We even offer models that

feature instant convertibility from alternate to momentary action! All provide T-1½ lamp compatibility, large double terminals, metal (not plastic) mounting nuts, behind-panel space economy, 1-to-4 pole availability and 5 Amp, 250 Volt ratings.

Within the prestigious TH Series, you can select electromechanical or electronic switches in both lighted and unlighted versions, and with a broad, broad range of bezel and lens sizes and shapes. Choose bezels that are tapered, straight, covered... even mushroom caps. Get pushbutton, key-operated and rotary versions.

Specify interlock switches, oil-tight switches, and multiple switch assemblies. And always ensure the best possible solution to your switching needs.

For complete details on how the new generation of Unimax Status Symbols can help you, write or call for details on TH Series LPB's today: Unimax Switch Corp., Ives Rd., Wallingford, CT 06492; Tel. (203) 269-8701.

 **Unimax  
Switch**

For more information, Circle No 40



## News

stages switch every 200 mV. Input for the logarithmic device spans 0 to 1058 mV, with switching for every 3-dB voltage increase. Built-in 10-mV switching hysteresis in these 5-step devices prevents oscillation when sensing slow transitions.

For driving 10-bar displays, TI offers linear 16-pin and logarithmic 14-pin devices. The essential difference between two of the linear drivers (TL490, TL491) lies in their driver-transistor outputs: The 490 incorporates open-collector drivers that sink 40 mA and withstand 32V when OFF, while the 491 has open-emitter drivers that sink 25 mA and hold off 25V. Additionally, the 490 can drive LEDs (or lamps), while the 491 suits VF bar displays.

A separate pin aids in cascading these devices to form longer displays (Fig 3). Input impedance is only 10 k $\Omega$  for both units, and threshold intervals adjust from 50 to 200 mV via a resistor going from pin 6 to ground. Nominal full-scale inputs equal 500 and 2000 mV, respectively.

Two logarithmic 10-step detector/drivers from TI (TL480, TL481) provide an input impedance of 100 k $\Omega$ . But these 14-pin devices omit the simplified cascade-connection features of their linear counterparts. The TL480 contains 40-mA, 32V LED drivers, while the TL481 incorporates 25-mA, 35V VF drivers. The first comparator stage of both devices switches at a typical input of 203 mV, with subsequent outputs switching at 2-dB increments up to 1614 mV—when all 10 display elements are lighted.

### Series LED drive cuts dissipation

Telefunken's contribution to bar-scale driver design is a series of 8-pin DIPs that drive five LEDs with either linear or log-scale outputs. The circuitry in these ICs is basic: An external regulated voltage feeds the scaling-resistor network for the 5-comparator string, and the lower end of the string is grounded.

But the chips provide an

# DATASTAR™



the bright new answer to data viewing problems, available only from CLINTON . . . THE ANSWER PEOPLE IN CRT'S. Clinton's new DATASTAR high Contrast Phosphors (available in versions of P-4 and P-31) are the first and only phosphors developed specifically for information display applications.

With Clinton's new DATASTAR high contrast phosphors the operator does not have to adjust the tube to a high brightness level in order to achieve good readability under high ambient light conditions. This also means less spot distortion and delayed screen/phosphor discoloration, common to alpha-numeric displays. In addition, DATASTAR phosphors are significantly more resistant to discoloration, therefore the Clinton CRT has a longer useful field life.

Combine the advantages of DATASTAR phosphors with Clinton's high resolution SUPER-TUBES, and you have a CRT display unequalled in quality and performance. DATASTAR . . . Just one more innovation from CLINTON . . . THE ANSWER PEOPLE IN CRT'S. See the DATASTAR phosphors in operation in booth 3206 at the N.C.C.



**CLINTON  
ELECTRONICS  
CORPORATION**

6701 Clinton Rd., Rockford, Ill. 61111 Phone 815-633-1444 Telex 257-484

For more information, Circle No 56



## Operational Amplifiers ... the Problem Solvers

The 1460 — The obvious choice for your high speed, high power applications.



- $\pm 30$  V @ 150 mA output
- 1.0 GHz Gain Bandwidth
- 30 V/ $\mu$ s Slew Rate
- VMOS Output Stage

The 1430 — Your solution to those D/A and fast sample and hold designs that call for fast and smooth settling.




- 200 ns settling to 0.01%
- $\pm 10$  V @ 50 mA output
- 500 V/ $\mu$ s Slew Rate
- 80 MHz Gain Bandwidth



For more information, Circle No 41

## Technology News

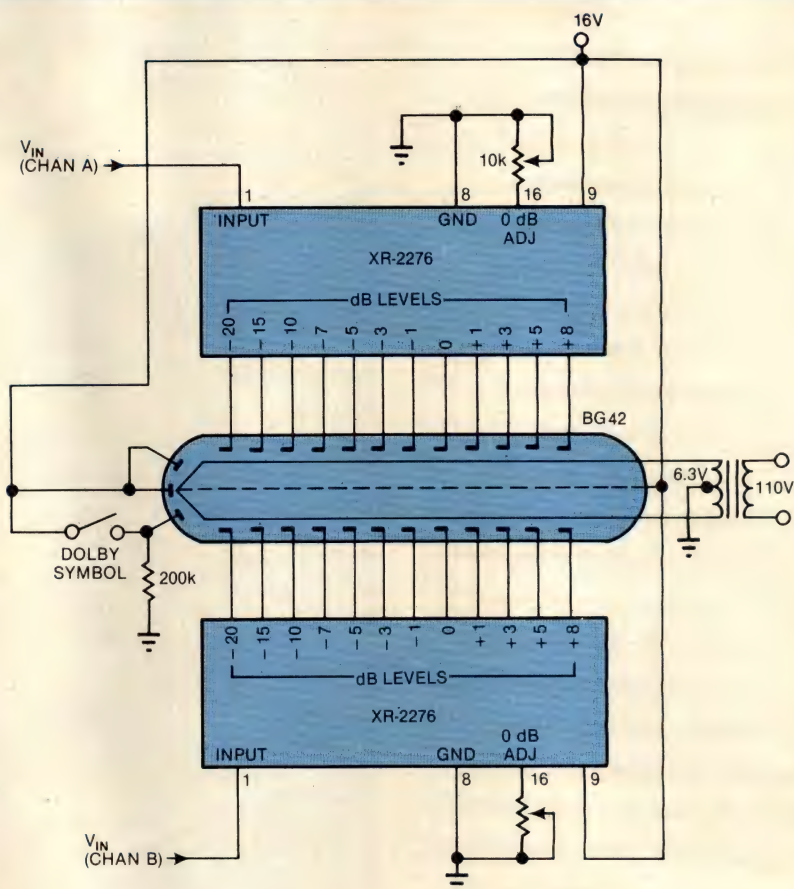

**Fig 5—Twin-channel audio-level indication** results from using two Exar 2276 12-element VF bar-graph drivers. The output of each 2276 illuminates half of a dual 12-bar display (Futaba BG42 or NEC 2B1745). The 12 elements span a range of  $-8$  to  $+20$  dB; the 10-k $\Omega$  pots adjust the 0-dB reference levels for both channels.

interesting power-saving capability. An internal constant-current supply is adjusted for 20 mA of LED current. The LEDs connect in series, and their junctions connect to the IC's driver terminals (Fig 4). When all comparators are OFF (or down), the LED current diverts to ground through bypass transistors connected to the comparator outputs. As the comparators turn on (or up), the transistors turn off one by one, allowing current to then flow through the LEDs to ground.

As a result, the chip's dissipation is minimized because the drive current remains at only 20 mA with all LEDs ON. Contrast this arrangement with a parallel-drive one like National's, where the current through each LED adds to the total. In this case, the current would be 100 mA—an excessive

amount for the small Telefunken IC.

With the Telefunken chips, supply voltage is the sum of the voltage drops across the LEDs and the constant-current supply. Assuming that red LEDs have a maximum forward voltage of about 2V at 20 mA, the drop across the five devices is 10V, plus another 2V for the current source—12V total. For all-green or all-yellow LEDs, forward voltage equals about 3.2V, implying a total of 18V for the supply.

The Telefunken ICs are designed to be paired for cascading. For example, the U237B and U247B each provide a 5-step linear output, but the thresholds of the U237B's comparator string lie between those of the U247B.

Specifically, fairly sharp thresholds exist for the U237B at 0.2, 0.4,



Introducing the HS5200 Series ADC's:

# Designed for the new MIL Specs...



## And packaged like a tank.

In response to emerging military standards for high-rel 12-bit ADC's, our new HS5200 Series offers adjustment-free performance . . . at an attractive price . . . with the highest levels of reliability. And it's packaged for ruggedness and true hermeticity.

Others talk high-rel; Hybrid Systems delivers. Take our tough, all-metal package: HS5200 ADC's never crack or buckle when you plug them into your PC boards or systems. And we offer the best cost-performance ratios in the business . . . because we know what that same high-rel means to our customers. Just ask your source inspectors.

Then consider this: conversion time 10uSec typical . . .  $\pm 0.002\%$  power supply rejection . . . and no trimming resistors required to adjust offset and gain . . . full complement of bipolar and unipolar input ranges from  $\pm 5$  to  $\pm 10V$  . . . with external reference models available for even higher accuracy.

**For performance,  
experience and reliability,  
go with the leader.**

## Hybrid Systems CORPORATION

Crosby Drive, Bedford, MA 01730  
Phone (617) 275-1570  
(TWX 710-326-7584 HYBRIDSYS BFRD)

In Germany: Hybrid Systems GmbH.  
6100 Darmstadt, Luisenplatz 4, Germany  
Tel. 6151-291595 (TELEX 419390 HYSY D)

In France: Hybrid Systems S.A.R.L.  
14 Rue du Morvan SILIC 525  
94633 Rungis CEDEX, France  
Tel. 1-6878337 (TELEX 250969 HYSYS)

In the United Kingdom:  
Hybrid (Component) Systems U.K. Ltd.  
12A Park Street, Camberley, Surrey  
Tel. (0276) 28128 (TELEX 858720 HYBRID G)

For more information, Circle No 42



# Technology News

0.6, 0.8 and 1V, while those for the U247B are at 0.1, 0.3, 0.5, 0.7 and 0.9V. To obtain a 10-step LED drive, you apply the same input voltage to both ICs; the LEDs driven by each chip then light up alternately. For more gradual transitions, you can use the firm's U244B/U254B as a 10-step pair.

Telefunken's U257B and U267B are similarly paired, but in this case the steps are logarithmic, ranging in a 10-step connection from -20 dB for a 0.1V input to +6 dB for a 2V input to the U257B.

## VF units in consumer applications

The use of VF displays in automotive and consumer products is growing fast. One VF driver for such applications, employed with a Futaba display in a Hitachi tape deck, is the 16-pin Hitachi HA12019. It was developed to produce a 12-point VU bar-graph display that logarithmically corresponds to the input dc voltage. In it, an on-chip constant-current generator supplies the scaling-resistor

network from the input supply voltage.

For a nominal 12V input supply, a 5-mA max output current is available for the VF-tube anodes; the IC operates from a 10 to 24V supply. The 12 driven VF bars display an input-voltage span of -20 to +8 dB. A similar 16-pin chip with a linear-step output to a VF bar display (HA12010) is also available.

With another offering, Exar has developed a 12-bar dB-level display detector/driver specifically for interfacing with VF displays. This 16-pin XR-2276 contains an input buffer, a bias network and 12 comparators. The bias network consists of a voltage reference and a string of scaling resistors, weighted to provided logarithmic-step outputs between -8 and +20 dB with reference to a 0-dB level setting. A pin provides 0-dB adjustment. Allowable input signals range from 4.5 to 5.5V. A dual-channel VF display using two XR-2276s appears in Fig 5.

**EDN**

## For more information...

For more information on the products described in this article, contact the following manufacturers directly or circle the appropriate numbers on the Information Retrieval Service card.

**Exar Integrated Systems Inc**  
Box 62229  
Sunnyvale, CA 94088  
(408) 732-7970  
Circle No 433

**Futaba Corp of America**  
555 W Victoria St  
Compton, CA 90220  
(213) 537-9610  
Circle No 434

**General Instrument Corp**  
Optoelectronics Div  
3400 Hillview Ave  
Palo Alto, CA 94304  
(415) 493-0400  
Circle No 435

**Hewlett-Packard Co**  
640 Page Mill Rd  
Palo Alto, CA 94304  
(415) 493-1212  
Circle No 436

**Hitachi America Ltd**  
707 W Algonquin Rd  
Arlington Heights, IL 60005  
(312) 593-7660  
Circle No 437

**Litronix Inc**  
19000 Homestead Rd  
Cupertino, CA 95014  
(408) 257-7910  
Circle No 438

**National Semiconductor Corp**  
2900 Semiconductor Dr  
Santa Clara, CA 95051  
(408) 737-5000  
Circle No 439

**NEC America**  
3120 Central Expressway  
Santa Clara, CA 95051  
(408) 241-8222  
Circle No 440

**Noritake Electronics**  
22410 Hawthorne Blvd  
Torrance, CA 90505  
(213) 373-6704  
Circle No 441

**Sanyo Semiconductor**  
291 S Van Brunt St  
Englewood, NJ 07631  
(201) 871-0061  
Circle No 442

**Siemens Corp**  
186 Wood Ave South  
Iselin, NJ 08830  
(201) 494-1000  
Circle No 443

**Sharp Electronics Corp**  
10 Keystone Pl  
Paramus, NJ 07652  
(201) 265-5600  
Circle No 444

**Telefunken Corp**  
Rte 22 (Orr Dr)  
Somerville, NJ 08876  
(201) 722-9800  
Circle No 445

**Texas Instruments Inc**  
Box 1443, MS 6404  
Houston, TX 70001  
(214) 238-2481  
Circle No 446

## Call your Hughes Connector Representative

**ALABAMA**  
L & D, Inc.  
Mendenhallville  
(205) 828-3522

**ARIZONA**  
Morrow and Associates  
Tucson  
(602) 296-4719

**CALIFORNIA**  
DC Electronics  
Sunnyvale  
(408) 754-3894  
W.E.S.T., Inc.  
Newport Beach  
(714) 540-9040

**FLORIDA**  
Bolton Associates, Inc.  
Ft. Lauderdale  
(305) 491-5161  
Bolton Associates, Inc.  
St. Petersburg  
(813) 864-2294

**GEORGIA**  
L & D, Inc.  
Atlanta  
(404) 394-2243

**ILLINOIS**  
Probe Electronics  
Park Ridge  
(312) 616-2828

**IOWA**  
Enesco-Rep, Inc.  
Davenport  
(319) 386-6600

**KANSAS**  
Enesco-Rep, Inc.  
Overland Park  
(913) 381-7557

**MARYLAND**  
Kraft Electronic Sales, Inc.  
Towson  
(301) 828-5838

**MASSACHUSETTS**  
L-K Harman, Inc.  
Brookline  
(617) 232-6687  
L-K Harman, Inc.  
Haverhill  
(617) 373-1313  
L-K Harman, Inc.  
Lee  
(413) 243-1158

**MICHIGAN**  
Luebke Sales Co.  
Warren  
(313) 574-2230

**MINNESOTA**  
Bill Deming & Associates  
Minneapolis  
(612) 888-5000

**MISSOURI**  
Enesco-Rep, Inc.  
St. Louis  
(314) 567-3935

**NEW JERSEY**  
T.A. Adamo Sales, Inc.  
Pompton Plains  
(201) 835-5344

**NEW YORK**  
Fountain, Young & Co., Inc.  
East Syracuse  
(315) 437-7733

**NORTH CAROLINA**  
L & D, Inc.  
Greensboro  
(919) 292-3201

**OHIO**  
Luebke Sales Co.  
Cincinnati  
(513) 871-4211

**Luebke Sales Co.**  
Cleveland  
(216) 333-0425

**Luebke Sales Co.**  
Columbus  
(614) 475-5504

**Luebke Sales Co.**  
Dayton  
(513) 294-0426

**TEXAS**  
Space Electronics Corp.  
Houston  
(713) 445-4321

**Space Electronics Corp.**  
Irving  
(214) 251-3636


**VIRGINIA**  
L & D, Inc.  
Richmond  
(804) 359-0125

**WASHINGTON**  
Cunningham Sales Inc.  
Edmonds  
(206) 743-6300

**HUGHES**

HUGHES AIRCRAFT COMPANY  
CONNECTING DEVICES DIV.




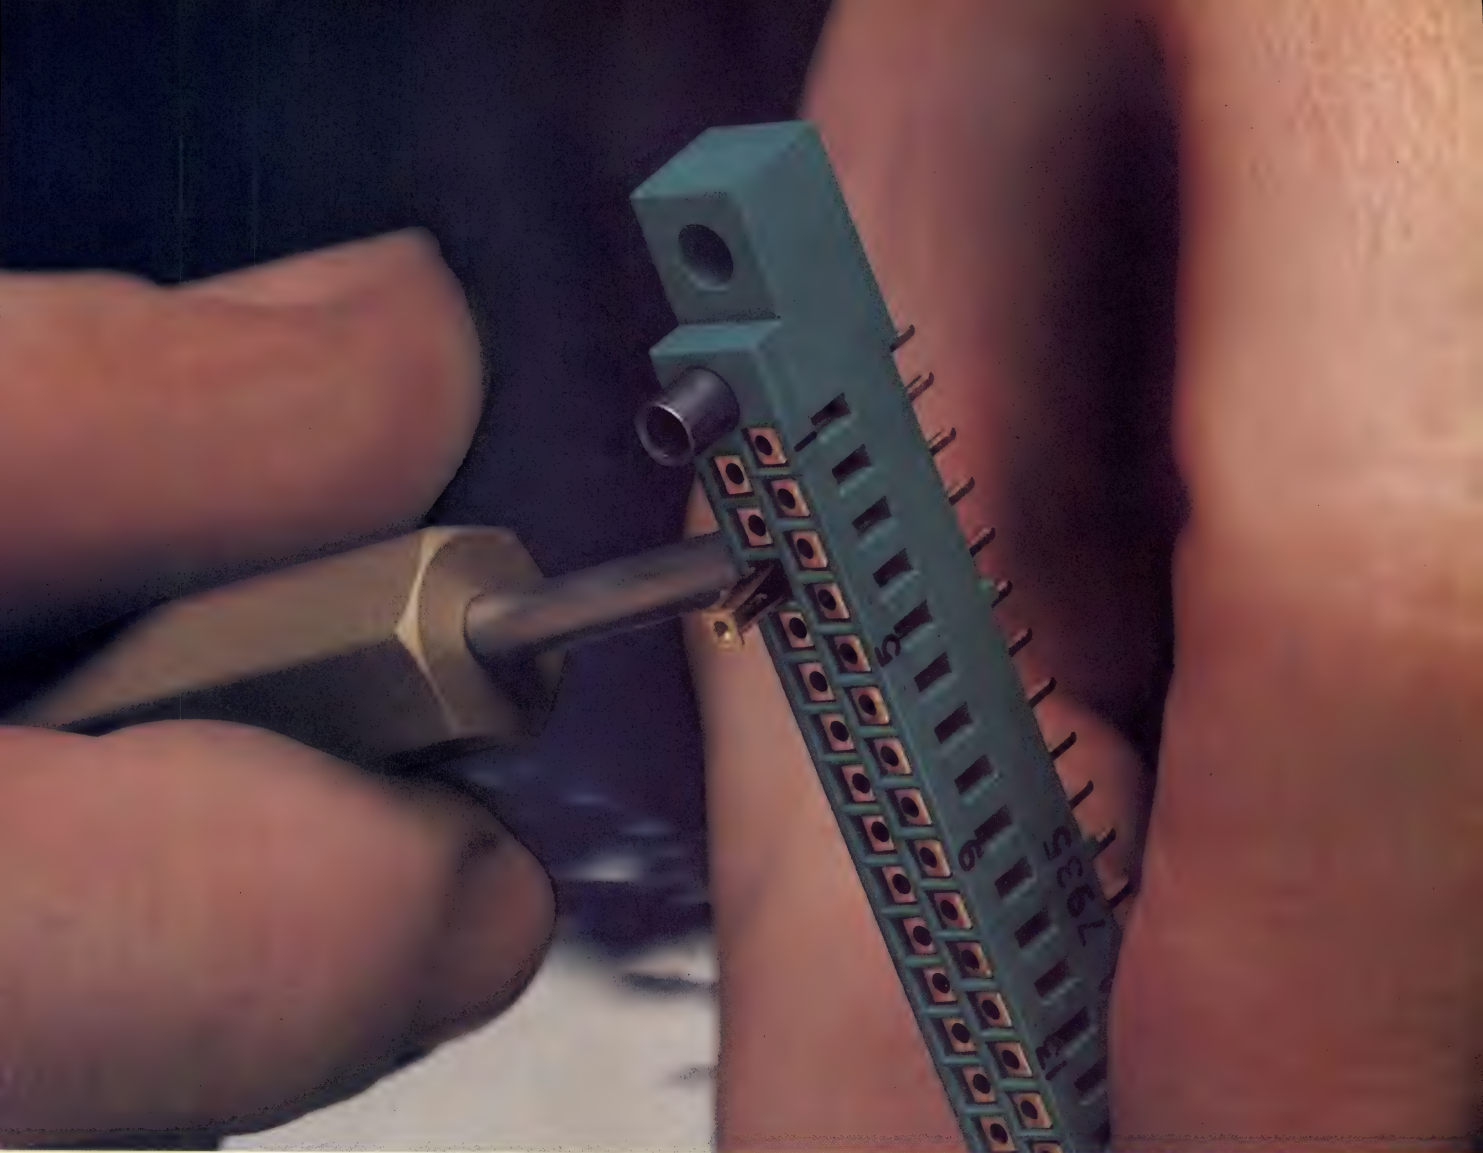

Now you can get Hughes quality in a printed circuit connector that meets the requirements of MIL-C-55302. But we've added some features to our version designed to improve performance. Features we believe make our connectors better in four ways:

1. Easier contact repairability, should it ever become necessary. Socket contacts can be easily removed from the connector face, doing away with the need to remove the entire connector.
2. Lower mating forces as a result of superior contact design and materials.
3. Easier terminations to flex circuitry, even to multi-layer flex, through improved connector design.
4. Greater contact reliability, thanks to the use of beryllium copper.

## **Hughes: Your New Source For MIL-C-55302 Connectors**

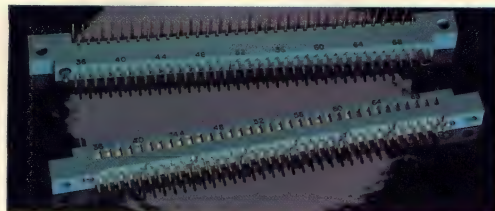

These printed circuit connectors are for use with multilayer PC boards or flexible printed wiring. Plugs are right angle with pin contacts, receptacles have socket contacts. Both bodies are available with or without mounting flange.

Hughes 55302 connectors conform to slash sheets /57, /58, /61, /62, and /64. The following sizes are available: 70, 56, 50, 44, 40, 36, 30, 26. Additional sizes available soon. A variety of hardware is offered.

For more information, pricing, or a catalog, contact your nearest Hughes Connector Representative. Or write:

Hughes Aircraft Company,  
Connecting Devices Division,  
17150 Von Karman Avenue,  
Irvine, California 92714.

**HUGHES**

HUGHES AIRCRAFT COMPANY  
CONNECTING DEVICES DIV.

For more information, Circle No 43







# Readers confirm dense-pc-board failures, report additional leakage, shorts problems

Dale Zeskind, Contributing Editor

Reports of the discovery of an intrinsic failure mechanism in high-density pc boards (EDN, September 5, 1979, pg 59) have generated reader responses not only confirming the existence of the mechanism but detailing additional failure phenomena as well. The responses point up some of the difficulties involved in applying designs with conductor spacings in the 10-mil range to conventional epoxy/glass boards.


### Insulation loss a danger

Researchers J N Lahti and D J Lando and their colleagues at Bell Labs, Whippany, NJ, had reported a catastrophic loss in insulation resistance between the conductors on the high-density boards under high-humidity (greater than 80%) conditions. The loss results from the electrochemical growth of a conductive copper compound along the boards' internal glass filaments.

In the case of at least one domestic equipment manufacturer, several instances of pc-board fires have been tentatively linked to this phenomenon.

Lahti and Lando have since been contacted by 20 to 30 domestic and foreign manufacturers who have experienced this and other difficulties with their high-density pc-board designs. Until now, many of these companies—among them some of the largest computer and instrument manufacturers—have been reluctant to openly discuss their difficulties, mistakenly assuming that their problems are unique to their manufacturing processes.

In addition to insulation-resistance failure, designers of dense pc boards commonly report the erratic appearance and disappearance of leakage paths between closely spaced conductors.

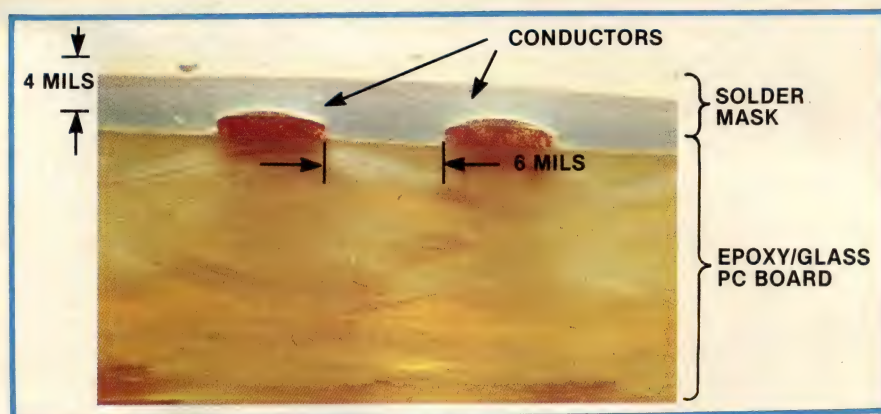

*If improperly applied, dry-film solder masks leave voids between closely spaced conductors on the surface of a pc board. These voids can trap moisture and impurities, thereby creating leakage paths. This cross-sectional view illustrates the proper application of such a mask; the 4-mil-thick mask (blue-tinted layer) completely fills the 6-mil-wide space between conductors on the surface of an epoxy/glass board. Note also the glass-fiber weaving inside the board (Photo courtesy Dynachem Corp)*

The experiences of Tom Valone, research engineer at the Scott Aviation Div of ATO Inc, Lancaster, NY, are typical. He reports observing several kilohms of leakage between 10-mil-spaced conductors. By baking his boards, he manages to completely eliminate the problem, only to see it slowly reappear over several hours. Other designers report a seasonal variation of this phenomenon—they encounter many leakage problems during the warm, humid summer months and few during winter.

### Designer disbelief

But despite the appearance of such reports, it's often difficult to convince design engineers of the possibility of pc-board or material-induced circuit failures, says John Bauer of Sperry Univac, Roseville, MN. These designers sometimes incorrectly assume that a pc board is a tried-and-true component with little likelihood of failure.

Of course, many leakage problems merely result from dirty boards: Surface residues absorb moisture and create conductive paths, whose effects closely spaced conductors exacerbate.


But several industry experts point out that merely cleaning boards after mounting and soldering components on them often doesn't suffice to alleviate the problem. Residues from the etching and plating process, if not properly removed by the pc fabricator, can become permanently affixed to the pc-board surface.

### Faulty drilling causes problems

Another problem that can plague high-density designs results from improper drilling procedures. Robert Williams of General Electric's Laminated and Insulating Materials Div, Coshocton, OH, explains that localized heat generated by improper drilling rates can actually force separation of the glass/epoxy interface. Impurities and sometimes even metal can wick into these separations during etching and plating processes, causing leakage paths and, in some cases, dead shorts.

Other industry sources explain that excessive thermal shock can, in general, weaken a board's ability to inhibit moisture and impurity penetration. (GE has recently announced an improved Engineered



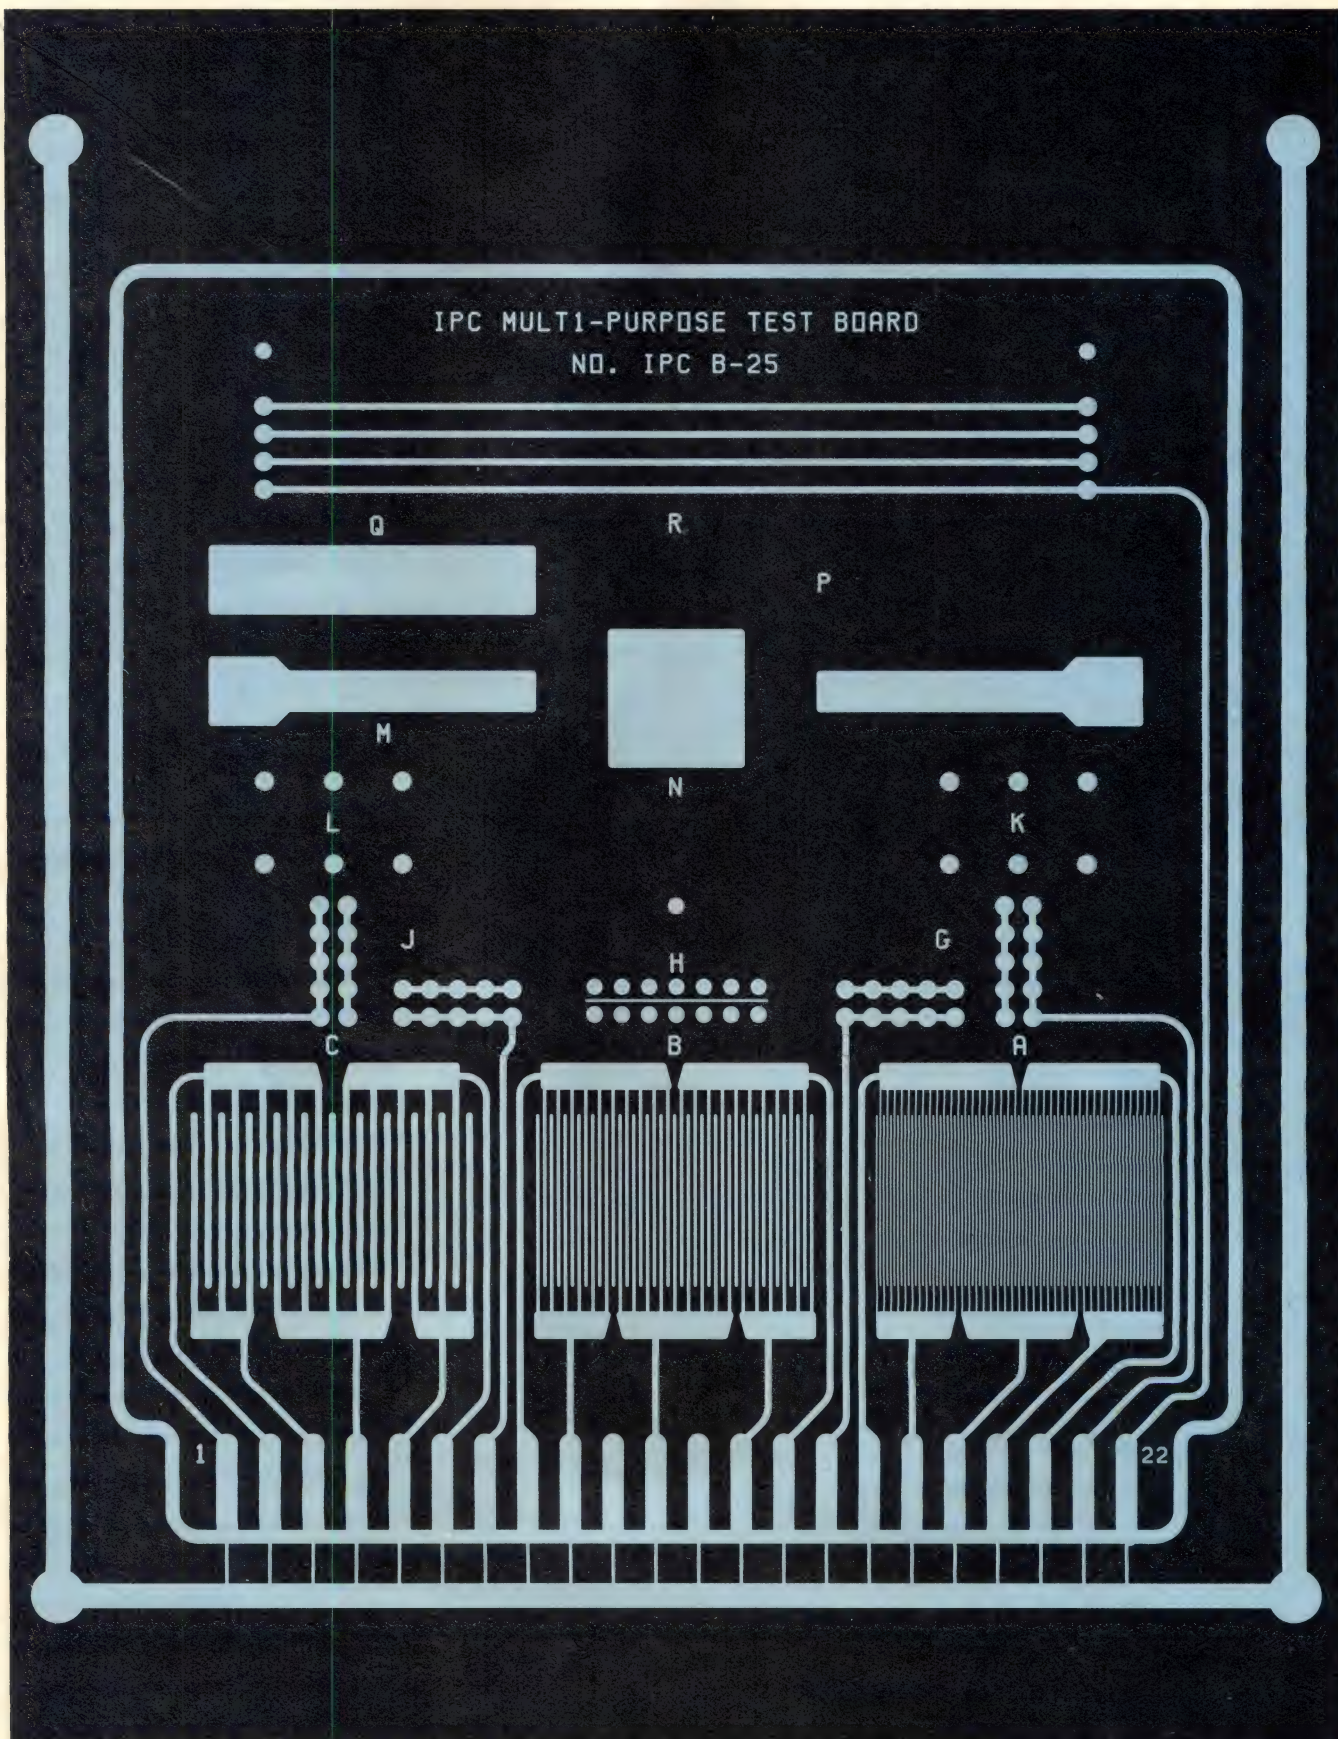

The quality of a pc fabricator's processing techniques can greatly influence the performance of high-density circuits. Therefore, the IPC recommends qualification of the fabricator's processes by means of a whole-board test pattern such as this one (IPC B-25).



## News

FR-4 material, which it believes exhibits greater resistance to these types of problems.)

### Use solder masks wisely

Solder masks often give rise to another problem in high-density designs.

Most pc fabricators employ one of two basic solder-mask concepts. In the first, a wet paint-like material, applied to the boards through a silkscreen, is cured either thermally or through exposure to UV light. Walt Custer of Thiokol's Dynachem Div, Santa Ana, CA, points out that you can specify several different grades of these so-called wet solder-mask materials. He recommends that if dealing with leakage-sensitive circuitry, you choose one of the higher grades.


The second solder-mask concept employs a dry photosensitive film consisting of a layer of polyethylene, a layer of photopolymer and a layer of Mylar. A special machine applies this film by first removing the polyethylene layer, then laminating the remaining two layers onto the pc surface under heat and pressure. The board is then photographically exposed through a photographic mask, and the Mylar is removed. The developed photopolymer acts as the solder mask.

PC fabricators often employ this dry-film approach in dense designs, where registration accuracy and dimensional stability prove critical. But the comments of C B Wilson of Texas Instruments, Lubbock, TX, typify those of many pc designers who warn against the potential pitfalls of the dry-film approach: If not properly applied, the film might not conform to the grooves between closely spaced conductors. The resulting cavities can trap impurities and moisture, resulting in serious leakage problems.

### Communication needed

If you are experiencing these types of problems in your high-density designs, what can you do? Most industry sources agree that it

## Your Micro Circuit Applications can Depend on VECO's New Chip Thermistors

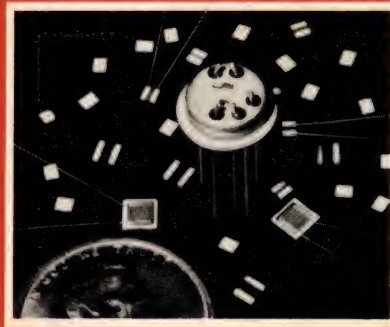

These new thermistors are available in a wide range of resistances (as low as 1% tolerance) and sizes, with or without leads. Chips feature both edge metallization and top/bottom metallization to suit your particular contact requirement. Gold electrodes are also available for those unique

applications which require special attachment techniques.

VECO chip thermistors complement our thick film thermistors (THINISTORS®) which are available in a wide variety of substrates and mounting configurations for non-contact sensing (IR Detection).



**VICTORY ENGINEERING CORP.**

VICTORY ROAD, P.O. BOX 559, SPRINGFIELD, NEW JERSEY 07081

TWX: 710-983-4430

TEL: 201-379-5900

For more information, Circle No 57

# FAST!



recording solutions  
for data acquisition,  
automatic testing,  
computer-aided design  
and more . . .

Dylon's GPIB (IEEE-488) 1/2-inch magnetic tape recording systems

- ☐ World-wide computer data interchange
- ☐ Archival data storage
- ☐ Disc back-up
- ☐ IBM and ANSI compatible formats
- ☐ Transfer rates to 100,000 bytes/sec.
- ☐ Dual buffers to 16,384 bytes.

**The Dylon Corporation**

3670 Ruffin Road, San Diego, CA 92123 (714) 292-5584 TWX: 910-335-1524



For more information, Circle No 58



# BUCKEYE CASES

Our line is **stacked** for your selection.



- Attractive Designs
- Unique Styles
- Standard Sizes
- Economy
- Color Choices
- Custom Piercing

Matching Instrumentation  
and

Two distinctive styles...

the **BUCKEYE** stamping co.

555 Marion Rd. Columbus OH 43207

Phone 614/445-8433

For Cases, Circle no 61

For Knobs, Circle no 62

## KNOBS



See us at Electro 80' booth number 1422-24

## News

pays to develop a close working relationship with your pc fabricator, making sure you understand each other's needs and the nature of the foregoing problems.

It also pays to periodically inspect pc fabricators' facilities and processes and to make sure they agree with you regarding the importance of proper drilling rates and cleaning procedures. Several observers suggest that you pay particular attention to the fabricators' temperature-control and cleaning procedures—before, during and after infrared reflow plating.

Additionally, you should establish comprehensive incoming inspection of fabricated pc boards. Measure electrical parameters such as leakage under a variety of environmental conditions; Texas Instruments, for example, routinely tests many of its boards for 2 wks at 45°C and 95% relative humidity.

### Standard test pattern


Noel Poduje, manager of product development for ADE Corp, Watertown, MA, additionally suggests that you incorporate into each of your sensitive pc designs a small standard pattern for testing leakage. Such a pattern should contain closely spaced conductors as well as plated-through holes.

Several such patterns already exist in various MIL and NEMA standards and in standards of the IPC (Institute for Interconnecting and Packaging Electronic Circuits, 3451 Church St, Evanston, IL 60203). However, only some of them are geared directly to high-density applications.

Finally, if you need more assistance, Dieter Bergman, technical director of the IPC, points out that there *are* solutions to most of the pc problems designers encounter. To this end, the IPC (considered by many to be the best source for up-to-date pc design information) offers a 3-day workshop geared directly to the needs of design engineers.

**EDN**

# SCHOTT

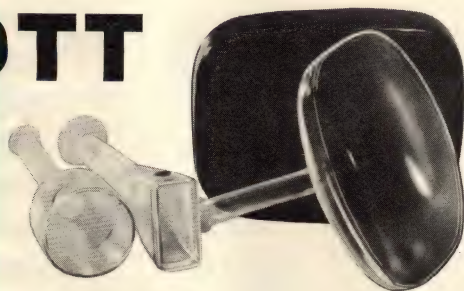

## GLASS SPECIALISTS READY TO...

advise and assist the research and development, design and production engineer in the design of new glass configurations and requirements for...

- CRT and TV Bulbs
- Pressed and blown glass parts  
for Cathode Ray Tubes, including Neck Tubing.



**SCHOTT  
AMERICA**

Nearly 100 years experience...  
Over 40,000,000 bulbs sold

11 EAST 26TH STREET, NEW YORK, N.Y. 10010 / (212) 679-8535

For more information, Circle No 59





# power supplies for your automatic test equipment

KEPCO  
series\*

ATE

\*38 Models from 50-1000 Watts;  
0-6V to 0-150V. Programmable  
from your GPIB/IEEE-488 Bus  
using Kepco SN Programmers.

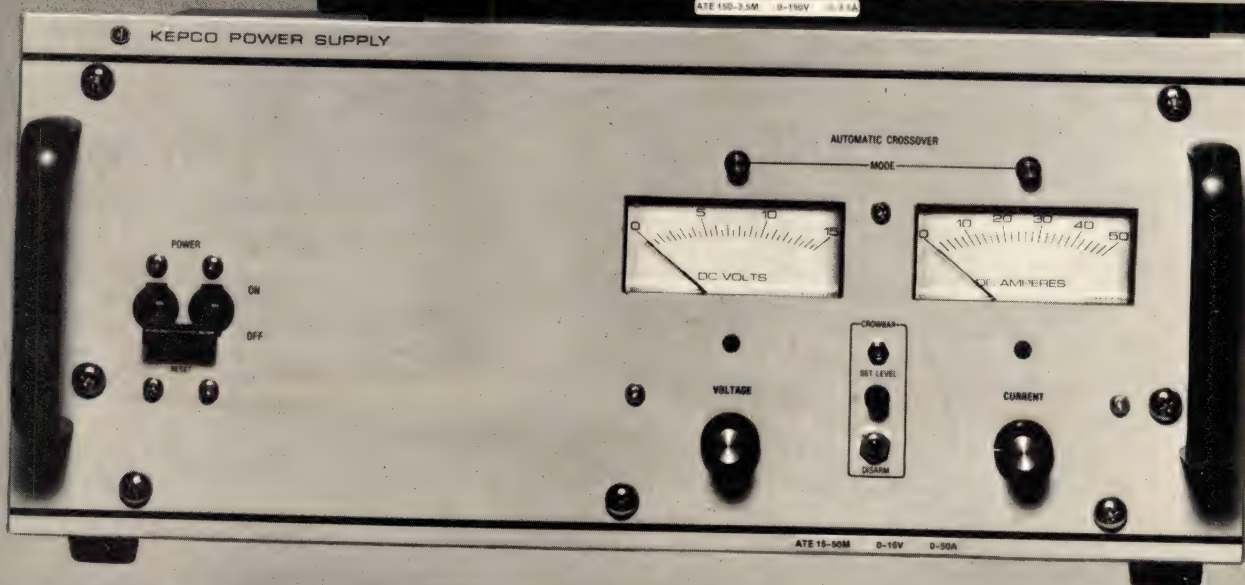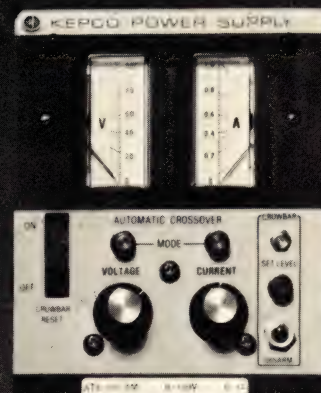

**KEPCO**®

For complete specifications, write Dept.

KEPCO, INC. • 131-38 SANFORD AVENUE • FLUSHING, N.Y. 11352 U.S.A. • (212) 461-7000 • TWX #710-582-2631 • Cable: KEPCOPOWER NEWYORK  
For more information, Circle No 60




# ENOUGH IS

## IT'S TIME SOMEONE ESTABLISHED 'INDUSTRIAL GRADE' COMPUTER SPECS

**It's Time Someone Established 'Industrial Grade' Computer Specs.** Computers started in clean rooms and then moved into offices. Soon people tried to put them out in the plants where they couldn't stand up to the heat, humidity and other hostile environmental factors.

But, just because a computer is smart enough to run a machine doesn't make it an 'industrial grade' computer. Too much computer hardware that is billed as 'industrial' breaks down in the real world of the plant.

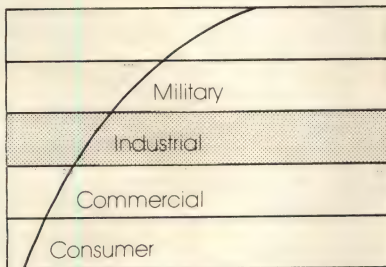

Industrial specifications for military computers are too stringent and too costly to be practical for industrial applications.

**Temperature.** We believe that the minimum acceptable 'industrial grade' temperature specification should be 60°C. Factories are not comfortable like offices. The temperature inside sealed enclosures is usually 15°C higher than the ambient plant temperature. XYCOM's '180+' line carries a 65°C specification.

**Relative Humidity.** In a plant, a computer should have a tolerance to relative humidity levels from 0% to 100%. They should also have resistance to condensation. The new XYCOM '180+' line with XYCOAT™ meets this stringent demand.

**Vibration.** Failures due to vibration are virtually always the result of faulty connections, boards or chips. To meet 'industrial grade' spec, chips should be soldered to the board and EPROMs clipped to their sockets. In addition, units should be subjected to 100% full vibration stress and subsequent testing to ensure maximum product integrity.


**Contaminant Protection.** Salts, dust, dirt and oils are enemies of computers. They even find their way into sealed cabinets in plants. The XYCOM '180+' line is XYCOATED to keep contaminants from the boards. (See corrosion.)

**Corrosion Protection.** Plants are killers when it comes to atmospheric contaminants that corrode and destroy. XYCOAT utilizes a specially formulated shield that protects module components from moisture, fungi, grease, oxidation, salt spray, acids, alkalis, and many other harmful elements. In addition, XYCOM connectors are industry proven gold.

**Testing Standards.** A computer failure is always bad, but in an industrial situation it can be disastrous. Testing Standards for 'industrial grade' should be higher than for 'commercial grade'. All components and assemblies should be tested at all stages of production. They need to be subjected to the full range of dynamic testing which includes power cycling and stress testing under extreme temperatures under

microcomputer control for up to 72 hours. This is in addition to our stress vibration cycle. All XYCOM products are tested to our 'industrial grade' standards.

**Warranty.** For industrial purposes a warranty needs to cover the period soon after installation when most failures will occur. We believe that a year warranty offers the most desirable cost to reliability ratio for both manufacturer and user. It is our philosophy that, although the extent of our testing is extensive, the resulting savings due to greatly reduced warranty claims keeps XYCOM products competitive and your plant operating.

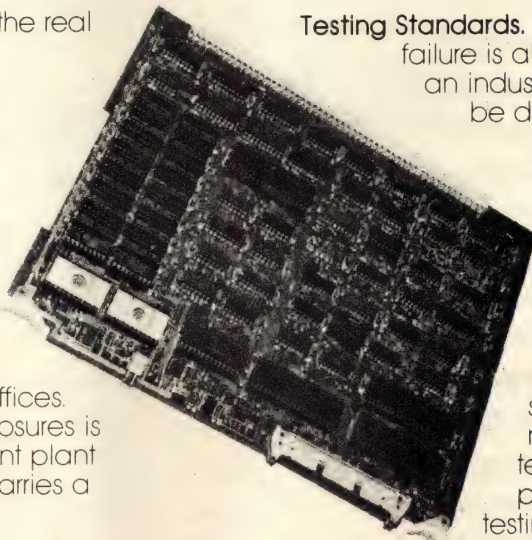



# ENOUGH!

## ...AND STOP SENDING BOYS TO DO MEN'S WORK

Introducing the XYCOM 180+ Line. Now, we are setting a new standard for the others to match. Every '180+' module is XYCOATED and uses gold connectors. Our regular 180 line meets

most 'industrial grade' specs which is sufficient for most factories. The '180+' line exceeds 'spec' and is for even tougher environments.

### COMPARE 180+™ 'SPEC FOR SPEC'

We've told you what we think 'spec' should be. Look at how our '180+' line shapes up and compare us with any other product that espouses to the 'industrial grade' designation.

Common Features	Intel	DEC	Motorola	Others	XYCOM 180 +
Temperature					65°C
Relative Humidity					0% - 100%
Vibration					100% Vibration Stress
Contaminant Protection					XYCOAT meets petroleum industry standards
Testing Standards					100% Accelerated burn-in with power cycling, full dynamic testing
Warranty					1 year

#### Specific '180+' Features

Digital I/O: T<sup>2</sup>L I/O, 64 channel.  
64 channel power out.

CPU: Minimum Cost CPU.  
High Performance CPU.

Memory: Multiple 65k EPROM cards.  
Multiple 65k RAM cards.

Analog I/O: 12 bit, 300 v common mode  
integrating A/D.  
8 channel, 4 to 20 ma isolated D/A.

Software: Multitasking Runtime Executives,  
Assembly, Fortran IV, Industrial Pascal.

## Accept the XYCOM Challenge (You could win a week for two to Club Med, Cancun.)

We want you to compare the XYCOM '180+' line with any other product that aspires to the 'industrial grade' designation. Just fill in the specifications for any competitive industrial computer, fill in your name and address and send your entry to us. Everyone that makes a comparison gets a gift. One entry per person. The grand prize winner will be selected by drawing before September 30, 1980. Entries must be received by July 31, 1980. The trip must be taken between January 1, 1981 and May 31, 1981.

Name \_\_\_\_\_ Title \_\_\_\_\_  
Co. \_\_\_\_\_ Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

P.O. Box 984  
Ann Arbor, Michigan 48106  
Phone: (313) 429-4970  
TWX: 810-223-8153

**xycom**™  
The Hardhat Computer People


For more information, Circle No 63



# Evaluate vibration / noise anywhere

## with ONE portable FFT spectrum analyzer.

**NEW PRODUCT**

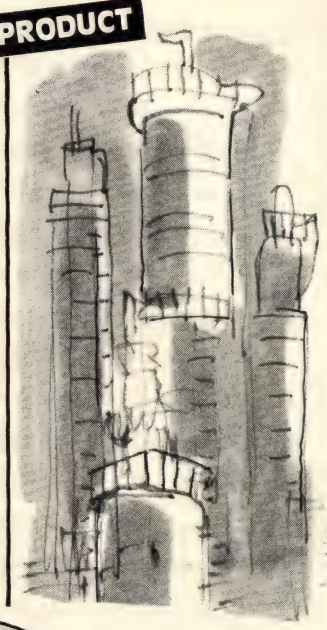

Nicolet's new 446B-1311\* provides in ONE portable real-time spectrum analyzer a complete laboratory to measure, store, compare and evaluate vibration signatures, resonances, or noise on-site with 14-built-in capabilities ...

**(NEW) 1. Storage of time or frequency** (with analyzer setups) digitally on mini-tape cassettes ... exact recall of reference spectra for comparison to measure change ... fast field recording for later lab plotting.

**(NEW) 2. Strobe control** through unique sinewave output at cursor to quickly identify a machine running speed peak in the spectrum<sup>(a)</sup>.


**(NEW) 3. Transfer and control** by digital peripherals through the IEEE488 interface.

**4. High resolution analysis** (400-lines) to pinpoint vibration sources ... "zoom" expansion X20,000 (50Hz window) with out-of-band protection up to 100 kHz<sup>(a)</sup>.

**5. Averaging to match process** ... stable (sum), moving (exponential), maximum (peak profile), or background removal (difference).

**6. Comparison of two spectra** (400-line, 1/3 or 1/1 octave<sup>(b)</sup>) through difference or ratio display and measurement ... a baseline spectrum may have been recalled from the built-in tape recorder.

**7. Identification of orders** through harmonic cursor and order normalized signature displays.



### New Built-in Tape

Digital mini-cassettes store 34 400-line spectra on each side ... also store 1/3-octave spectra<sup>(b)</sup> or time functions ... data recalled by I.D. number ... records include screen annotation for understanding of how data was processed.

**8. Conversion from acceleration to velocity** to displacement readings to match past data through integration/differentiation.

**9. Accelerometer power supply** for piezo-electric transducers with built-in amplifiers.

**10. Engineering unit calibration**, including frequency in "RPM" (cycles per minute).

**11. Transient data capture** and analysis.

**12. Self-test routine** to simplify emergency field repair of digital logic<sup>(c)</sup>.

**(ACOUSTICS) 13. Sound level measurements** in dBA (overall A-weighted RMS) ... A-weighting can be applied to any spectrum.

**(ACOUSTICS) 14. 1/3 and 1/1 octave analysis<sup>(b)</sup>** to evaluate noise.

### Problem-solving services

Nicolet Structural Analysis Consulting Group solves structural problems with or without Nicolet equipment.

10-Minute Color Film explains and shows a step-by-step Modal Analysis of Le Car with animated display of results.

NICOLET-DynaVibes offers contract machine diagnostic services.

#### Footnotes:

\*The 446B-1311 is an expanded version of the widely used 446A and has all the capabilities of the 446A.

(a) Option-2 (b) Option-3 (c) Option-5

Call Dot Hubner for a demonstration at your facility on your data.

**NSC** NICOLET  
SCIENTIFIC  
CORPORATION  
The problem solving company

245 Livingston St., Northvale, NJ 07647  
Tel. (201) 767-7100. TWX: 710 991 9619

U.K. Tel. (0926) 44111 Japan 06-3052150.  
Germany (0611) 812075. (and factory trained representatives  
Canada 416-625-8302. in major countries throughout  
France (1) 955-50-70 the free world)

Engineering  
positions open —  
digital design,  
applications




# Laboratory-oscilloscope choices grow as makers expand cost, performance options

Andy Santoni, Western Editor

Since EDN's recent Special Report on laboratory oscilloscopes (January 20, pg 98), your choices have broadened at both ends of the lab-scope price/performance spectrum: Scope makers have introduced high-performance units that help you make measurements more easily than ever, plus low-cost units with features never before available in the low-end price range.

Here are the latest introductions:

- Model 5650 from Kikusui International Corp—a dual-trace, 50-MHz unit with alternate timebase, plug-in construction and a price \$150 less than its competition's.
- Model SC60 from Sencore Inc—a \$1595 60-MHz, dual-trace unit that marks the firm's first venture outside the TV/service field and into the engineering lab
- Model 468 from Tektronix Inc—identical to the firm's industry-standard Model 465

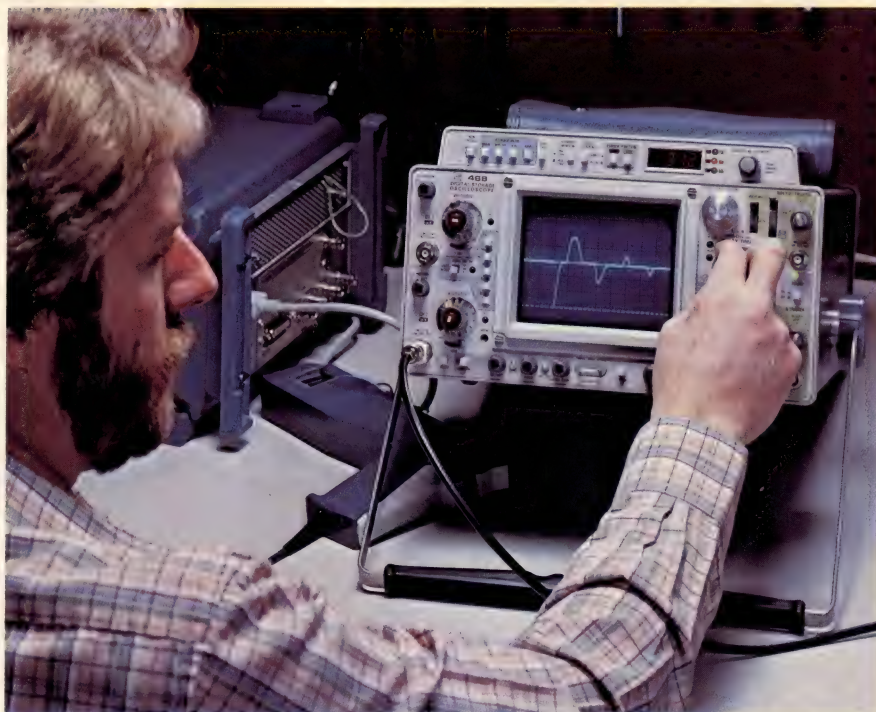

Add 10-MHz digital storage to the industry-standard 465B and you have the Tektronix 468.

but with an added feature: digital storage with a useful bandwidth to 10 MHz

- Model 7854 from Tektronix—a 400-MHz plug-in scope that

combines analog performance with  $\mu$ P-based waveform processing in a \$10,500 package.

### 488-bus compatibility

The Tektronix 7854 offers the features you'd expect in a high-performance lab scope: dc to 400-MHz bandwidth at 10 mV/div, calibrated sweep rates to 500 psec and a choice of more than 30 7000 Series plug-ins. Additionally, it provides digital storage of repetitive waveforms up to 400 MHz, signal averaging to reduce noise, storage of single-shot events with a sweep rate as fast as 50  $\mu$ sec/div and (with an optional 7B87 plug-in) pretrigger display from 0 to 100%. Digital storage also gives you vertical and horizontal resolution of up to 0.01 div on stored data, with a choice of 128, 256, 512 or 1024 horizontal points per waveform.


The scope is preprogrammed so that you can make the most common




Alternate timebase lets you view as many as four waveforms simultaneously on Kikusui's Model 5650.




# we give you more ways to protect circuits

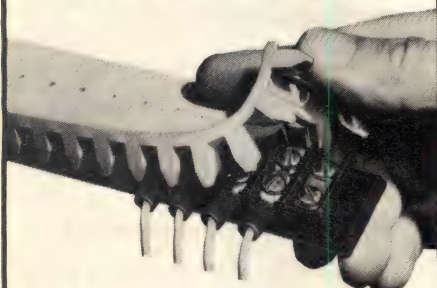


**Safe-Ti Caps™** protect connections against spills, dirt and accidental short circuits from dropped tools.

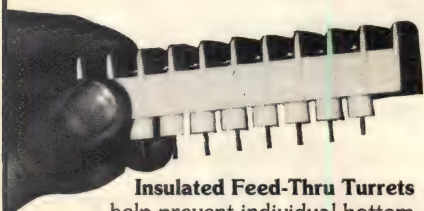

**Insulated Feed-Thru Turrets** help prevent individual bottom terminations from contacting chassis.

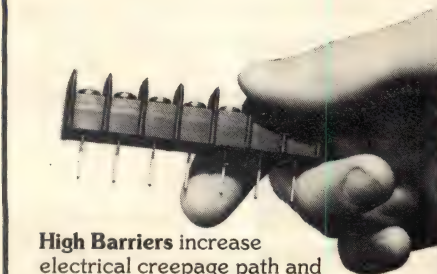

**High Barriers** increase electrical creepage path and permit use of multiple conductors.

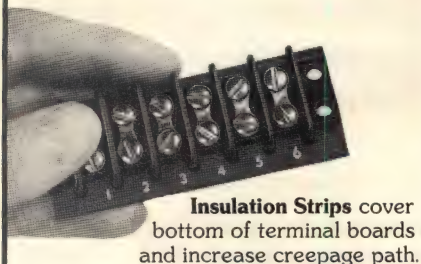

**Insulation Strips** cover bottom of terminal boards and increase creepage path.

# Kulka

A NORTH  
AMERICAN  
PHILIPS  
COMPANY

KULKA ELECTRIC CORP., 520 S. FULTON AVENUE  
MOUNT VERNON, NY 10551 TEL: 914 664 4024

For more information, Circle No 66

## Technology News

measurements (rise time, fall time and pulse width), along with complex waveform comparisons, by pushing a button on a calculator-like keyboard. This keyboard also allows you to create your own measurement programs, monitor signals without being present or automate a series of measurements.

Keystroke instructions for the CRT text can go to the 7854 via an IEEE-488 interface, which can also

handle waveform data or measurement results. Tied to Tektronix's Model 4052 graphic desktop computer, the scope becomes a WP 1310 signal-processing system, priced at \$26,350.

### 465B goes digital

Digital storage costing less than the 7854's is a feature of Tektronix's \$4600 Model 468. This scope has all the capabilities of Model 465B in its



A \$1595 price tag and 60-MHz bandwidth combine in Sencore's Model SC60.



Digital storage, programmability and an IEEE-488 interface combine with 400-MHz analog performance in Tektronix's 7854.



# What to do with **Intolerable Card Enclosures:**

## **The hibachi**



Electro-Space Fabricators has a suggestion. Next time you receive a shipment of card enclosures that are too tight or too loose, misaligned or just plain out of tolerance, why not use them for hibachis? Ridiculous? Not nearly so ridiculous as the money you waste on racks that don't meet your needs.

At Electro-Space, the right enclosure begins with in-depth value analysis, a free service of our design group.

**ESF**  
**Electro-Space  
Fabricators, Inc.**

The result is a unit which meets your exact specifications . . . along with greater strength and real structural integrity. Most important, you enjoy complete design flexibility and the resources of the leader in card enclosure manufacturing . . . all at costs well below off-the-shelf racks.

If you want an hibachi, go to a department store. If you want card enclosures that are totally tolerable, come to us.

Call 215-682-7181

*The Tolerance People, West High Street, Tipton, PA 19562*

*For more information, Circle No 67*



## MA-B950 Series

# the first commercially available dot-matrix LCD's

### COMPLETE WITH INTEGRAL CMOS LSI DRIVER

Epson brings the legibility of 1/8 multiplex dot matrix to LCD's with its new MA-B950 Series of modules. Each contains integral CMOS-LSI controlling and driving electronics plus a temperature compensated power distribution circuit. Total power consumption is only 30mW from a +5 volt, -5 volt source. Connected to user's microprocessor data RAM and character generator, units present large black 5×7 reflective dot matrix characters on a gray background. Samples may be ordered immediately from stock. Requests for custom LCD modules and displays are welcomed.

### Four versions available:

Model	Total Characters (Characters × Lines)	Character Height
MA-B950B	64 (32 × 2)	0.22" (5.58 mm)
MA-B952B	40 (20 × 2)	0.26" (6.53 mm)
MA-B955B	16 (16 × 1)	0.17" (4.38 mm)
MA-B956B	32 (16 × 2)	0.26" (6.53 mm)

### SEND FOR PRICES AND COMPLETE INFORMATION TO EPSON AMERICA, INC.

23844 Hawthorne Blvd., Torrance, CA 90505  
Telephone (213) 378-2220 • TWX 910 344-7390

# EPSON

For more information, Circle No 68

## News

nonstorage mode and works just like a nonstorage scope even in its digital-storage mode. (Pushing a button selects the appropriate mode.)

With digital storage, no interactions take place between storage-level and intensity controls. The combination of a 25M-sample/sec, 8-bit digitizer and a display-interpolation technique that requires only 2.5 samples/cycle to display sinusoidal signals accurately provides a useful bandwidth of 10 MHz.

An Envelope mode uses dual sampling rates and records maximum and minimum values of a waveform envelope into memory over a selectable number of sweeps—two to 256 or continuous. It can capture narrow pulses on long sweeps and proves useful for glitch catching, waveform-excursion viewing and aliasing detection.

Optional signal averaging and cursors for time and voltage differences simplify operation. An IEEE-488 interface is also optional.

### Competition heats up

Although scopes like Model 465B have given Tektronix the lead in the lab-quality portable-scope arena, new competition is appearing. For example, Kikusui's Model 5650 is comparable in basic specs to Tektronix's Model 455 but provides more features. And its price is \$1895—\$150 less than that of a 455.

Like the 455, the 5650 has 50-MHz bandwidth at 5-mV/div minimum deflection factor. However, the 455 provides faster sweep speeds: 5 nsec/div min at ×10 magnification, compared with 10 nsec/div in the 5650.


But the 5650 features alternate timebase—a capability that can make troubleshooting easier. With it, you can compare four traces simultaneously—the two input channels and expanded segments of each.

It's easy to troubleshoot the 5650, too, if that task should ever prove necessary. Modular construction



# For exceptional ESD circuit protection.

## Meet the New Zero Inductance transient suppressor.

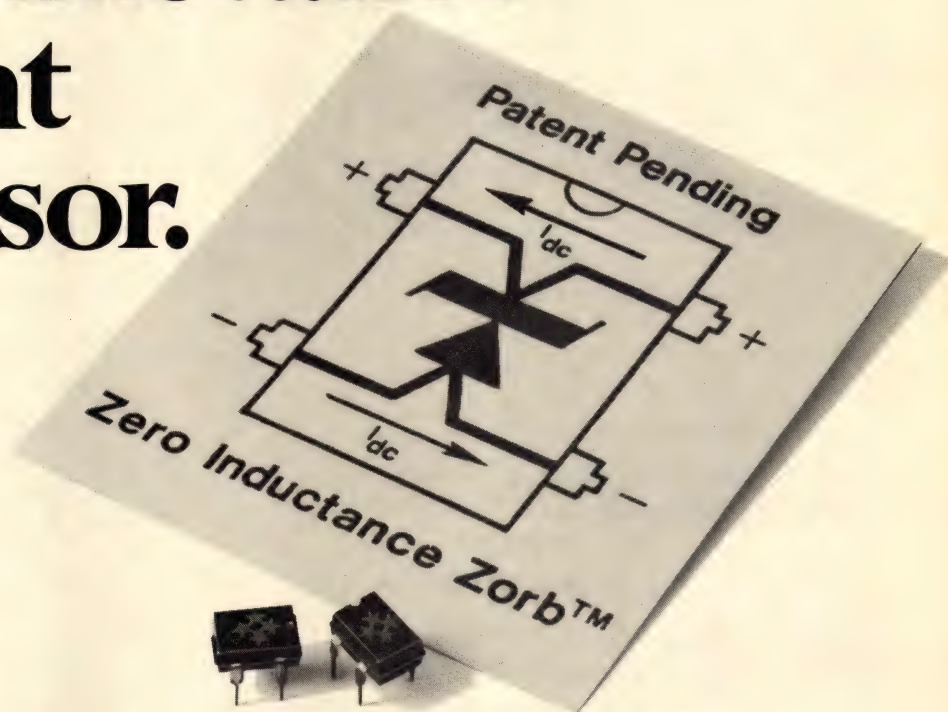

This all new TransZorb® transient voltage suppressor uses a zero inductance design\* to protect integrated circuits from Electrostatic Discharge (ESD). It will clamp ESD transients and stop the inductive overshoot voltage caused by nanosecond rise-time transients. Zero inductance means zero overshoot and lower clamping.

ESD is characterized by rise-times of 2 Kilovolts per nanosecond and peak current of 40 Amps at 20,000 Volts. The new Zorb™ is


quicker than that, and you can save your memories, microprocessors, and other IC's from upset and failure. It can also save your dollars and your product reputation, too. Think about it. Then, call or write General Semiconductor for complete information on this new ESDA TransZorb series.

\*Patent Pending

TransZorb® is a registered trademark of General Semiconductor Industries, Inc.

Zorb™ is a registered trademark of General Semiconductor Industries, Inc.

*For more information, Circle No 69*



**GENERAL  
SEMICONDUCTOR  
INDUSTRIES, INC.**



## VCXOs, TCXOs: Unmatched Versatility.

Damon continues to be recognized as the leader in the design and production of low noise VCXOs/TCXOs. Backed by the technical expertise of our engineering team, Damon offers VCXOs and TCXOs with unique performance characteristics.

**VCXOs Highest Modulation Rate**— Modulation Rate: DC to 2 MHz! Peak Deviation: .03% of C.F. Center Frequency: .1 to 500 MHz. FM Distortion: Less than 5%.

**Widest Deviation Bandwidth**— Peak Deviation: 0.5 % of C.F. Linearity:  $\pm 3\%$ . Center Frequency: 0.1 to 500 MHz.

**Exceptional Spectral Purity**— Center Frequency: 40 to 120 MHz (overtone VCXO). Peak Deviation: 10 to 30 KHz. Linearity:  $\pm 1\%$ . No Harmonically Related Spectral Lines From 0 to 1.9 X C.F.

### TCXOs

Temp. Range	Standard	High Stability
0° to +50°C	0.5-5PPM	to 0.1PPM
-20° to +71°C	2-10PPM	to 0.5PPM
-55° to +85°C	4-20PPM	to 1.0PPM

Damon Electronics: The recognized leader in state-of-the-art, dependable VCXOs and TCXOs plus a high-quality line of crystal filters.



For further information, write or call Ed Doherty, (617) 449-0800

 **DAMON/ELECTRONICS DIVISION**  
80 WILSON WAY, WESTWOOD, MASS. 02090, TEL: (617) 449-0800

For more information, Circle No 72

## Choke Design Made Easy

Send for complete information on the DC and AC characteristics of low cost, high performance iron powder toroidal cores for EMI and power filters. New information includes energy storage curves with application notes to simplify choke design.

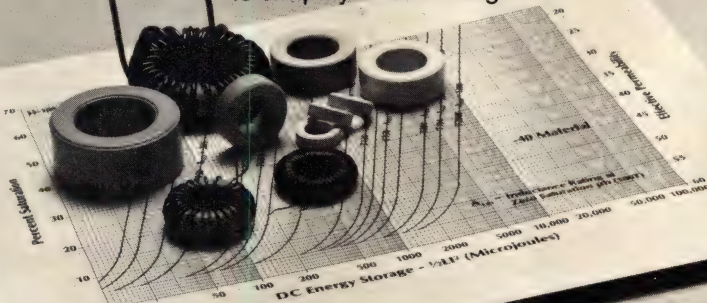

**MICROMETALS, INC.**

1190 N. Hawk Circle, Anaheim, CA 92807 • (714) 630-7420 • TWX 910-591-1690

For more information, Circle No 73

## News

### For more information...

For more information on the latest in laboratory oscilloscopes, contact the following manufacturers directly or circle the appropriate numbers on the Information Retrieval Service card.

**Kikusui International Corp**  
17121 S Central Ave  
Carson, CA 90746  
(213) 638-6107  
Circle No 447

**Sencore Inc**  
3200 Sencore Dr  
Sioux Falls, SD 57107  
(605) 339-0100  
Circle No 448

**Tektronix Inc**  
Box 1700  
Beaverton, OR 97075  
(503) 644-0161  
Circle No 449

and plug-in boards cut disassembly time to 5 min.

### Cutting costs

The lowest priced of the four new scopes, Sencore's Model SC60 Widebander provides a 60-MHz bandwidth ( $-3$  dB) and is usable to 100 MHz, where its response is down 12 dB. Input sensitivity equals 5 mV/div, and maximum measurable input voltage with a  $\times 10$  probe is 1600V p-p. Inputs are protected to 2 kV.

The unit provides TV sync separators and TV preset positions, and signals only 0.5 div high can trigger it. It also incorporates a beam finder so you can be sure a signal's there and properly connected, even though the scope's controls might be improperly set. **EDN**

## JOB SHOPPING?

Check EDN's Career Opportunities

**EDN: Everything Designers Need**



10 to 30 MHz oscilloscopes with more performance and reliability than you ever thought possible.



It's easy to see why LEADER oscilloscopes are now specified more than ever. More performance and quality for less cost... with immediate deliveries from over 100 stocking distributors. They also come with the best two-year warranty in the industry... backed by efficient factory service depots on the East and West Coasts.

### A full-range of reliable, medium bandwidth oscilloscopes.

LEADER's oscilloscope line includes 11 models, single and dual trace versions, for bench or field use. All models offer comprehensive triggering controls, TTL compatible Z-axis modulation, front panel trace alignment control and convenient, color-keyed front panel layout. Probes are furnished with every oscilloscope and options include probe pouches, carrying cases, front panel covers and rack mounting adapters.

### 30 MHz delayed sweep - \$1,530.

LBO-515B is a compact, precision oscilloscope at a moderate price. Using a PDA 4-inch CRT with parallax-free internal graticule, it features 5 mV sensitivity and delayed sweep for viewing and measuring complex waveforms. Also has 120 ns signal delay, trigger hold-off and x-y operation at full sensitivity.

### 30 MHz with signal delay - \$1,100.

LBO-520 combines a 11.7 ns rise time with 5 mV sensitivity and 120 ns signal

# The surprising leader.

delay lines. Has single shot triggering, X10 sweep magnifier and bright, sharp PDA CRT. Triggers to 50 MHz.

### 20 MHz dual and single trace - \$835., \$610.

LBO-508A and LBO-507A give you versatility at low cost. Rise time is 17.5 ns with 1 M $\Omega$  (35 pFd) input impedance. Automatic or external triggering, X5 sweep magnifier, 10 mV/cm sensitivity and add/subtract modes.



Oscilloscopes, frequency counters, function generators, video and audio instruments... a LEADER instrument for almost every need.

### 10 MHz with 1 mV sensitivity - \$645.

LBO-514 has both vertical and horizontal X5 magnifiers. Sensitivity is from 1 mV/cm to 10 V/cm. Sweep speeds from 0.2 s/cm to 0.1  $\mu$ s/cm. Auto or normal triggering. Z-axis modulation. (Single trace version, LBO-513, \$495.)

### 20 MHz battery/ac portable - \$950.

LBO-308S provides lab performance and high reliability in field service applications. Sensitivity is 2 mV with a complete set of triggering controls and 18 sweep ranges to 0.1  $\mu$ s/div. with X5 magnifier. Compact, lightweight with 3-inch rectangular, internal graticule CRT. (Optional 2 hour internal battery pack is recharged during ac operation, \$75.00.)

### Two-year warranty. Evaluation units.

A history of high reliability permits LEADER to provide a generous 2-year warranty... backed by factory service depots on the East and West Coasts.

A free, trial use of LEADER instruments

is available to all qualified companies.

Call toll-free (800) 645-5104 to request:

- an evaluation unit
- our 40-page catalog
- the name of your nearest "Select" distributor
- additional information

When Quality Counts



**LEADER**  
Instruments Corporation

380 Oser Avenue  
Hauppauge, N.Y. 11787 (516) 231-6900  
Regional Offices:  
Chicago, Los Angeles, Dallas.

For product literature, Circle no 23  
For product demonstration, Circle no 24



# Super D\*

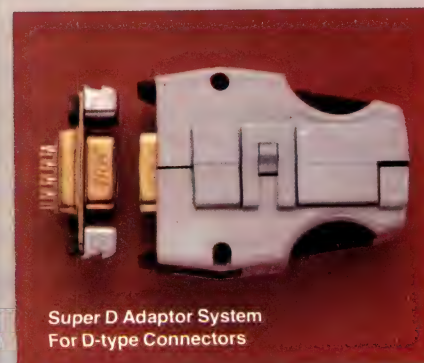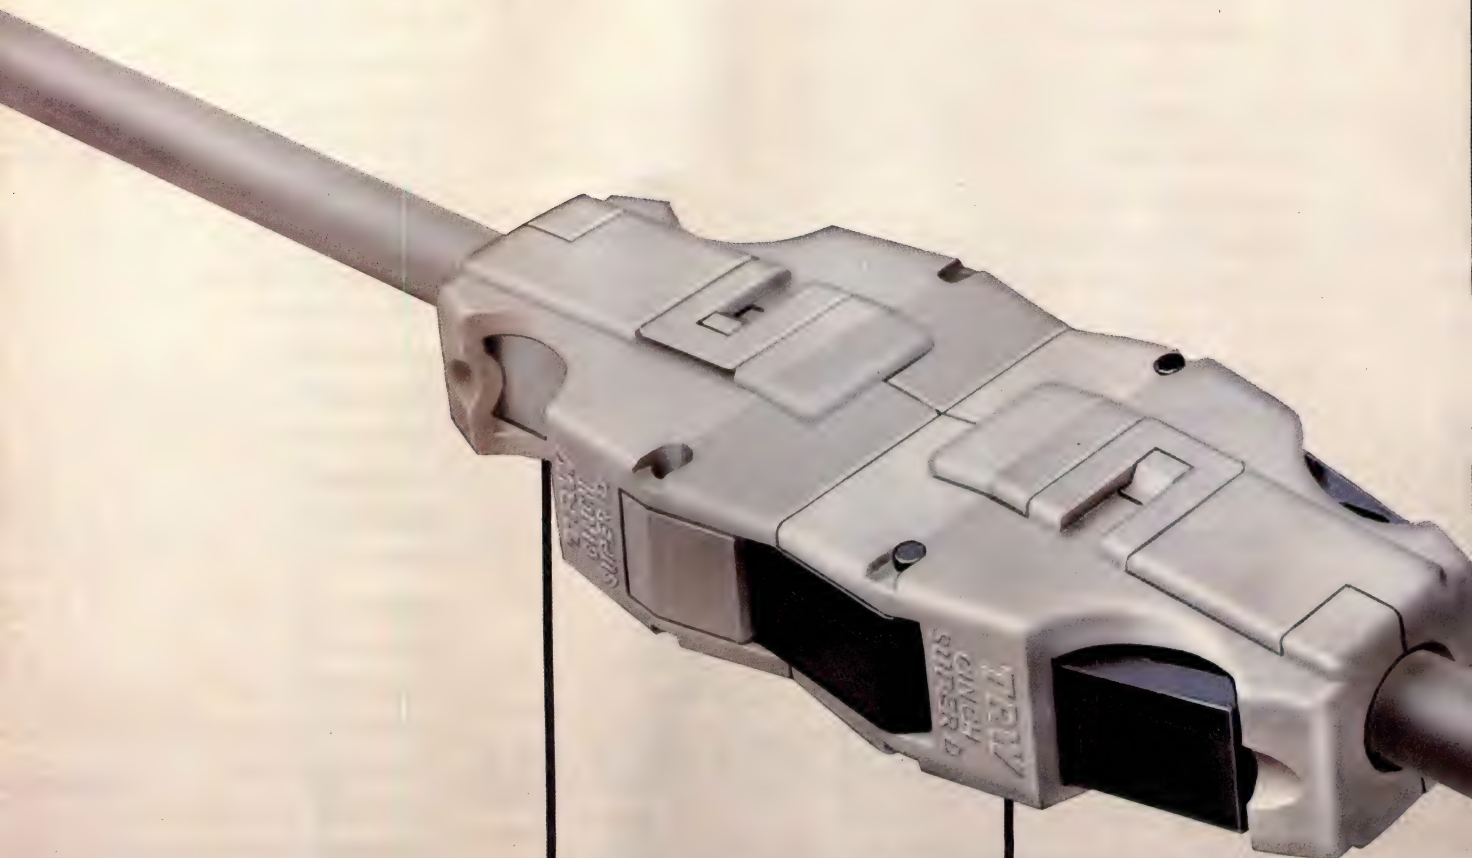

\*Trademark TRW Inc.

U.S. Patent Nos.  
3,902,154 4,035,049 4,090,770  
other Patents Pending



# A unique all plastic snap-locking connector system that costs less and does more than standard D-Subs.

## Here's Why Super D\* is "The D With The Difference".

Different? You bet! TRW Cinch's all new Super D connector system has the exclusive design features and cost-saving benefits that move it to the top of any D-Sub line!

Let's begin with cost savings. Most D-sub connectors require soldering or crimping. Not Super D connectors. Our new pre-loaded pin/socket contacts provide solderless insulation displacement 4-point termination.

This unique contact also gives you twice as many contact points at mating end as other D-sub designs. All without wire prepping or stripping. Result? Immediate assembly time reduction and a positive cost savings with increased reliability!

But that's not all! Besides fast, solderless termination, Super D connectors also have snap-on plastic hoods that feature an exclusive Latch-N-Lock design for positive, audible locking with no additional tools, parts or labor. Just push to connect, squeeze and pull to disconnect. It's that easy!

To convert standard TRW Cinch D-sub to the Super D system, ask us about our special adaptor system for D-type connectors.

Looking for style and design? Look no further! Super D's cost-effective all-plastic assembly is both smooth and functional to complement the styling of your computer, peripheral, data communication, instrumentation or video equipment.

This plastic design effectively insures against shock hazards.

Super D connectors employ *selective* gold plating only where it is needed. We've eliminated expensive gold from non-functioning surfaces. So you get performance without added cost.

The Super D connector is available in four sizes (9, 15, 25, and 37 contacts) for cable-to-cable and cable-to-panel modes. Each will intermate with existing D-type connectors. And, you'll be glad to know that the Super D system is designed to meet EIA Standard RS449 plus IS04902 and 4903 for your DTE and DCE equipment.

To further speed your termination time, TRW Cinch has designed three terminating tools specifically for the Super D connector system. Use Auto-Clinch D\* for high volume; Certi-Clinch D\* for moderate production and field installation; and Uni-Clinch D for field repair.

So take a long, hard look at the D-sub you're using now. Then, take a look at Super D connectors. There is a big difference! To get the Super D difference, write or call your TRW Electronic Component Sales Office ...listed in EEM, or TRW Cinch Connectors, A Division of TRW Inc., 1501 Morse Avenue, Elk Grove Village, IL 60007. 312/981-6000



## **TRW** CINCH CONNECTORS

For more information, Circle No 74







# "Our hole-to-hole registration is critical. Photocircuits boards help set the standard."

Dick Johnson, Production Manager, Teltone.

"Teltone is riding the crest of growth and change in the telecommunications industry.

"Our central office, PBX, key telephone and service analysis equipment is important but not unique to our customers. So we've got to be extremely competitive.

"Today we're building a new plant to be even more competitive. Which is where automatic insertion and Photocircuits come in.

"About three years ago we decided that our board quality had to be better. Especially as we moved toward incorporating automatic insertion.

"We looked over the field and decided to give Photocircuits a try.

"We'd been having a fair amount of trouble with PTH boards in automatic insertion because hole-to-hole registration is critical.

"Then we began running Photocircuits boards. Their boards performed greater than Teltone expectations and Photocircuits helped establish our standard.

"And Photocircuits has helped us in other ways. Board warpage is an industry problem that has a lot to do with laminates. When some of their boards would not insert into our equipment housings, Photocircuits assisted us

in investigating the problem.

They offered design ideas on board layout to minimize the problem. And as the biggest independent board maker, they're in an excellent position to consult and negotiate with manufacturers.

Teltone is located across the country from Photocircuits (Kirkland, Washington), and we're getting response as if they were local.

"What I notice is the constant flow of questions about drawings. They are tougher on artwork than we are. Nothing is left to chance.

"But most important, they know that the board is a major unit of our products. A key to our being cost effective. And their attitude is much like our own.

"They know they'll succeed with their customers if they keep leading in quality, service and competitive prices."

If you want to succeed like Teltone, perhaps you need a supplier like Photocircuits. To find out, just contact your Photocircuits representative. Or call or write Photocircuits, PCK Sales, 31 Sea Cliff Avenue, Glen Cove, New York 11542. (516) 448-1301. A Division of Kollmorgen Corporation.

## **Photocircuits**

**Printed circuitry for mass-produced electronics.**

**See us at Electro '80 Booth No. 3101-3103**

*For more information, Circle No 75*



Why do people buy Digital's high-performance  
micros more than anyone else's?

Maybe it's because there's  
more to buy.





Digital Equipment Corporation has sold more 16-bit microcomputers than any other company in the business.

Over 100,000 of them.

And the reason is simple. We give you more to work with. More hardware, more software, and more true systems capability.

So you can develop your products faster, and offer your customers the right balance of cost and performance every time.

What's more, Digital's micros are software-compatible. Not just with each other, but with our entire PDP-11 minicomputer family as well.

So you'll never run out of ways to expand your business.

Just look at what we offer:

### **Digital's microcomputer family.**

You can choose from eight different configurations of our LSI-11/2 and -11/23 micros, in both boards and boxes. With high-performance features like general-purpose registers. Double-precision floating point processor. Up to 256Kb memory addressing. And the full instruction set of the PDP-11 family.

You also get the best form factor in the industry, because our micro boards measure just 5.2" x 8.9".

### **More options on the industry-standard bus.**

Once you have the micro you want, your possibilities are wide open.

You can choose from dozens of micro products: 9 different memory boards, 11 I/O modules, 9 communications options, even kits for designing your own custom interfacing.

There are also 8 different peripherals, including the TU 58 micro tape cartridge subsystem.

And the whole family runs on Digital's industry-standard LSI-11 Bus, the most widely copied bus structure in micros.

### **The only high-performance hardware with software to match.**

Digital's micro software is literally years ahead of the competition.

There's RSX-11M, the multitasking real-time operating system that sets performance standards for superminis. RSX-11S, a streamlined run-time version of -11M. And RT-11 for smaller single-task applications.

You also get development tools like an optimized FORTRAN IV-PLUS com-

piler and BASIC-PLUS-2. Even a ROM-mable FORTRAN for RT-11.

And Digital's development systems let you break your complex applications into manageable pieces, so several programmers can work on the same application at once.

That can save you plenty of development time.


### **The total approach to micros.**

Behind all Digital's micro products is a support commitment that's unmatched in the industry.

We have 13,000 support people worldwide. Technical consultation and training. And a wide range of support agreements — from do-it-yourself service using our special kits, to full support including coverage for your customers.

It's the total approach to micros, only from Digital.

For more information, contact **Digital Equipment Corporation**, MR2-2/M70, One Iron Way, Marlboro, MA 01752. Or call toll-free 800-225-9220. (In MA, HI, AK, and Canada, call 617-481-7400, ext. 5144.) Or contact your local Hamilton/Avnet distributor. In Europe: 12 av. des Morgines, 1213 Petit-Lancy/Geneva. In Canada: Digital Equipment of Canada, Ltd.

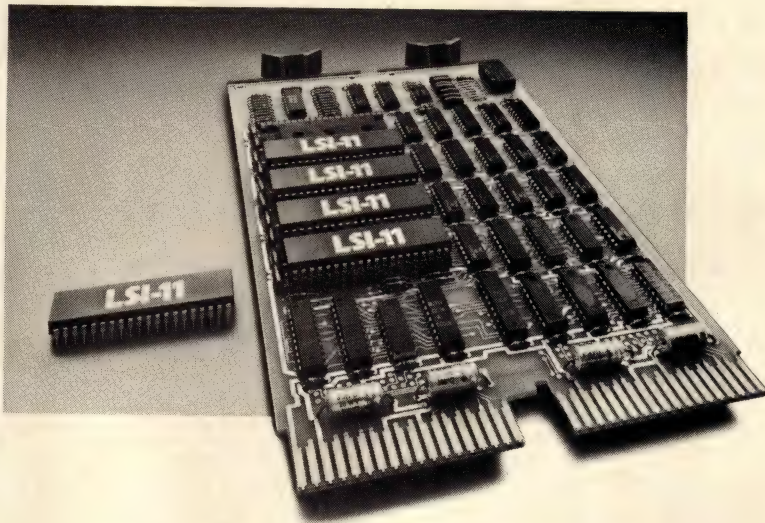

**It took the minicomputer company  
to make micros this easy.**

**digital**

For more information, Circle No 76



# Leadtime Index

## ACTIVE COMPONENTS

PRODUCT	LEADTIME IN WEEKS			PRODUCT	LEADTIME IN WEEKS		
	Min.	Max.	Trend		Min.	Max.	Trend
<b>DISCRETE SEMICONDUCTORS</b>				<b>MEMORY CIRCUITS</b>			
Diode, switching	9	11	=	EPROM	10	14	=
Diode, zener	7	10	=	PROM, bipolar	20	40	=
Rectifier, low-power	8	11	=	RAM, bipolar	7	16	=
Rectifier, power	8	11	=	RAM, CMOS	5	12	=
Thyristor, low-power	7	10	=	RAM, 4k MOS dynamic	8	11	=
Thyristor, power	5	11	=	RAM, 16k MOS dynamic	30	40	=
Transistor, bipolar power	8	12	=	RAM, 1k MOS static	6	13	=
Transistor, bipolar signal	8	15	=	RAM, 4k MOS static	8	10	=
FET, power	15	20	=	ROM, masked MOS	17	22	=
FET, signal	14	22	=	<b>MICROCOMPUTER/MEMORY SYSTEMS</b>			
Transistor, RF power	6	10	=	Core memory board	8	13	=
<b>DISPLAYS</b>				IC memory board	2	6	=
Fluorescent	4	12	=	Interface board	9	15	=
Gas-discharge	8	16	=	Microcomputer board	8	12	=
Incandescent	10	12	=	<b>MICROPROCESSOR IC'S</b>			
LED	5	12	=	CPU, bipolar bit slice	7	18	=
Liquid crystal	7	16	=	CPU, 4-bit MOS	9	18	=
Plasma panel	8	19	=	CPU, 8-bit MOS	10	20	up
<b>ELECTRON TUBES</b>				CPU, 16-bit MOS	8	14	up
CRT, black and white TV	2	14	=	Peripheral chip	9	17	=
CRT, color TV	5	15	▼	<b>OPTOELECTRONIC DEVICES</b>			
CRT, industrial	5	18	=	Coupler and isolator	10	17	up
Industrial power	10	18	▼	Discrete light-emitting diode	5	9	=
Light and image sensing	4	7	=	<b>PACKAGED FUNCTIONS</b>			
Microwave power	14	18	=	Amplifier, instrumentation	8	12	=
<b>INTEGRATED CIRCUITS, DIGITAL</b>				Amplifier, operational	7	11	=
CMOS	16	20	=	Amplifier, sample/hold	4	10	=
Diode transistor logic (DTL)	9	16	=	Converter, analog/digital	5	9	=
Emitter-coupled logic (ECL)	13	28	=	Converter, digital/analog	5	10	=
Low power Schottky TTL	25	35	=	<b>PANEL METERS</b>			
Standard Schottky TTL	20	30	up	Analog	12	28	▼
Standard TTL	24	33	=	Digital	12	20	▼
<b>INTEGRATED CIRCUITS, LINEAR</b>				<b>POWER SUPPLIES</b>			
Communications circuit	12	18	=	Custom	17	25	=
Data converter	8	12	=	Enclosed modular	12	16	up
Interface circuit	8	14	=	Open-frame module	13	18	=
Operational amplifier	11	16	=	Printed circuit	14	16	=
Voltage regulator	9	15	=				

Leadtimes are based on recent figures supplied to *Electronic Business* magazine by a composite group of major manufacturers and OEMs. They represent the typical times necessary to allocate manufacturing capacity to build and ship a medium-sized order for a moderately popular item. Trends represent changes expected for next month.



# Dow Corning® 631 silicone epoxy molding compound. Because you can't make tomorrow's electronic components with yesterday's technology.



A little over a year ago, Dow Corning quietly changed the state-of-the-art of the electronics industry.

We changed it with a product so unique, so totally outstanding, that it overshadowed all existing technology. The product was Dow Corning 631 silicone/epoxy molding compound. And it marked the dawn of a new generation of product performance.

We looked at the advantages of silicone. We looked at the advantages of epoxy. And brought them together to make the world's first successful silicone/epoxy molding compound.

Dow Corning 631 gives semiconductor device manufacturers the compatibility, moisture resistance, and ease of molding of silicone, coupled with the strength, strong lead seal, and salt-spray resistance of epoxy. What it means to semiconductor devices is unmatched reliability

and exceptional performance.


In almost any electronic product. Computers. Telecommunications equipment. Auto electronic devices. Almost anything.

For the past year, almost every major semiconductor manufacturer in the country has been testing Dow Corning 631. And the initial reports indicate that 631 is everything we designed it to be: strong, compatible, reliable.

Experience the dawn of the new generation of product performance for yourself.

For more information about what Dow Corning 631 silicone/epoxy molding compound can do for your products, write

Dow Corning  
Corporation,  
Department  
D-8578, Midland,  
Michigan 48640.

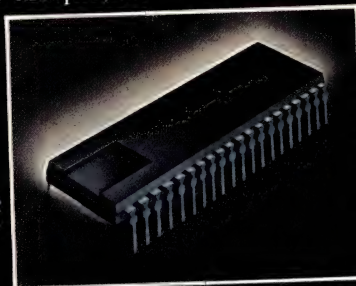

## **DOW CORNING**



©Copyright Dow Corning Corporation 1980.





## BRAIN CELLS.

Employed by smart engineers for reliable, dependable, rechargeable power.

Now available in four, basic 2V cell sizes, ranging from 2.5 to 25Ah, for dozens of battery configurations and hundreds of applications.

With outstanding float and cyclical characteristics and superior storage life.

All invented, manufactured and refined by Gates Energy.

Be wise. Contact Gates Energy Products Inc.,  
1050 S. Broadway, P.O. Box 5887,  
Denver, CO 80217. Phone (303) 744-4806.

# GATES ENERGY

Circle our number on the reader service card for additional input.

For more information, Circle No 78



# Editor's Choice: New Products

## 6809- $\mu$ P evaluation kit serves designers, technicians

Filling the need for evaluation and training material to assist both design engineers and technicians, the MEK6809D4 evaluation unit is part of its manufacturer's MOKEP (Motorola Kit Expansion Product) Series and is the firm's most powerful low-cost evaluation unit. It's the natural expansion of the company's familiar MEK6800D2 but offers considerably more power and features than that unit.

Among these features is a 300/1200-baud cassette interface that permits punch, load and verification of data with or without an offset. The unit's hardware/software operation allows a user to stop on an address; trace software either one instruction or one line at a time; modify, fill or search memory; enter ASCII characters; and set breakpoints.

### Expansions possible

Included on the board are 512 bytes of system RAM (expandable to 1k), 1k of user RAM and

either 2k or 4k of ROM. You also get provisions for an additional 4k of user RAM and six user-ROM sockets that configure for 1k, 2k, 4k or 8k single- or triple-supply ROMs and EPROMs. Furthermore, the board provides a fully buffered 70-pin edge connector that fits into the MEK68MB5 mother-board module for use in expanded systems.

The basic D4 module requires +5V at 2A, +12V at 25 mA and -12V at 23 mA. Its system clock comes from a 3.579-MHz crystal oscillator; provision for an external clock is also present. An optional RS-232-compatible serial port includes buffered handshake signals, and the board's baud-rate generator provides values ranging from 110 to 9600.

### 2-board system

In contrast to the manufacturer's previous evaluation line, the D4 Series can either stand alone and function with a terminal via its optional serial port and 4k-ROM operating system, or be


used in conjunction with the MEK68KPD. This latter module includes a 25-key keypad, eight 7-segment LED displays, an on-board 5V power supply and an uncommitted MC6821 peripheral interface adapter.

The 68KPD also includes a wire-wrapping area; the company feels that when using the kit in this configuration, designers and technicians will want the flexibility of later employing the D4 board in actual system designs. Partitioning the system in this manner also reduces the D4's cost.

The MEK6809D4's 1-board design implies expansion through use of the company's other offerings in the MEK Series, including mother boards and EPROM-programmer modules. The basic D4 unit costs \$445, with RS-232 interface \$25 additional. The MEK68KPD costs \$250.

**Motorola Inc, 3501 Ed Bluestein Blvd, Austin, TX 78721. Phone (512) 928-6000.**

**Circle No 454**

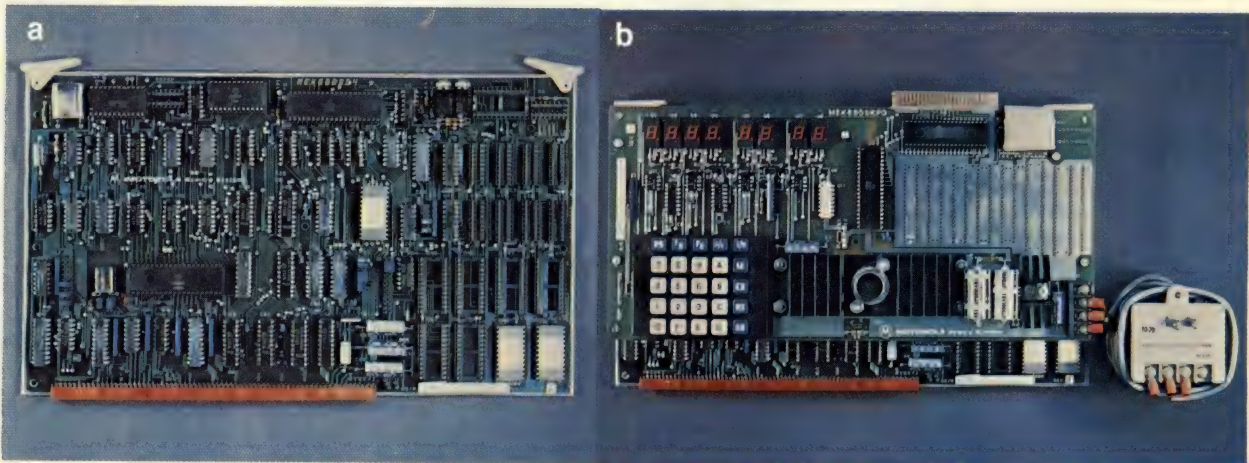

**A low-cost means of providing  $\mu$ P-technology updates, Motorola's MEK6809D4 evaluation module (a) can function in a stand-alone mode or in concert with the MEK68KPD display/keyboard/wire-wrapping board (b).**






## An edge for versatility


### Dale .156" Edgeboard Connectors

give you extra freedom in matching body materials, mounting variations, contact plating and termination styles. Choose from double or single readouts, .140" or .200" row spacing, 6 to 25 contact positions. Instant interchangeability with major connector manufacturers. Phone 605-665-9301 or Circle 35



## When timing is important

**Dale Clock Oscillators** are ready from stock in a choice of prices and profiles (as low as .200"). Functions include complementary output and enable/disable. All have 14-pin DIP configuration and TTL compatibility. Standard frequencies from 250 KHz to 25 MHz. Stability from .005% to 2.5%. Temperature compensated styles also available. Phone 602-967-7875 or Circle 36



# The many faces of Dale.

*Get to know them better.*



DALE ELECTRONICS, INC., Box 609, Columbus, Nebraska 68601 A subsidiary of The Lionel Corporation  
IN CANADA: Dale Electronics, Ltd. • IN EUROPE: Dale Electronics GmbH, 8031 Puchheim, West Germany



# Editor's Choice: New Products

## Programmable function generator features high intelligence

By incorporating both an autoprogrammer and nine storage registers in Model 5900, this instrument's designers have equipped it with capabilities not previously offered in a GPIB generator.

The autoprogrammer permits the generator to learn an entire procedure, which it can repeat at any specified rate. A 200-step capacity eliminates the need for a controller in low-level systems; it also dramatically reduces demands on CPU time in larger systems.

Combined with the instrument's arithmetic, autoincrement and autodecrement functions, the autoprogrammer provides precise, linear sweeps over a 10,000:1 range, log sweeps over the instrument's entire range and nested loops that can intermix log and linear sweeps. It also can operate on frequency, period, pulse width, duty cycle, amplitude (peak or rms), dc offset and burst-cycle count.

The nine storage registers allow you to keep on hand that many combinations of generator parameters for rapid retrieval — a timesaver in applications where many parameters must be changed for each test or where operating simplicity is required for production testing.

### Five waveform types

Covering 100  $\mu$ Hz to 5 MHz, Model 5900 puts out sine, square, triangle, pulse and sawtooth waveforms. Modes include continuous, gated, triggered, digital lin/log sweep



**Put this function generator to work** and you'll drastically reduce the manual labor required for repetitive measurements. Model 5900 provides high intelligence and extreme versatility in the expression of nonsymmetrical waveforms.

and triggered burst.

The instrument's 30V p-p output has 10-mV resolution, followed by a 20-, 40-, 60-dB attenuator. Other features include fixed and/or variable dc offset up to  $\pm 15$ V, 1 to 99% duty cycle, waveform inversion and zero/peak start levels for gated and triggered modes.

### Nonsymmetrical versatility

The instrument's intelligence provides extreme flexibility in expressing nonsymmetrical waveforms, permitting you to achieve any combination of frequency or period, positive duration, negative duration and duty cycle. You can enter amplitude as either a peak or an rms value, although peak amplitude is normally held

constant and the rms value calculated and displayed based on the selected waveform. \$3000. Delivery, 90 days ARO.

**Krohn-Hite Corp., Avon Industrial Park, Avon, MA 02322. Phone (617) 580-1660.**

**Circle No 455**

## NEXT TIME

In EDN's May 5 issue, look for a preview of key sessions and product exhibits at NCC '80. This year's National Computer Conference promises to be bigger and better than ever, and EDN will be there. Also look for feature articles on

- The latest serial printers, complete with a handy clip-out chart
- The next step in EDN's hands-on  $\mu$ C Design Series exploration of analog  $\mu$ Ps

You can't afford to miss this issue!

**EDN: Everything Designers Need**



TORE

RAISE

ENCE  
OR

VIEW  
TIME

• ERASE  
(PUSH)

MAX

NESS

MAX


E

RE

AY



1744A STORAGE O  
HEWLETT

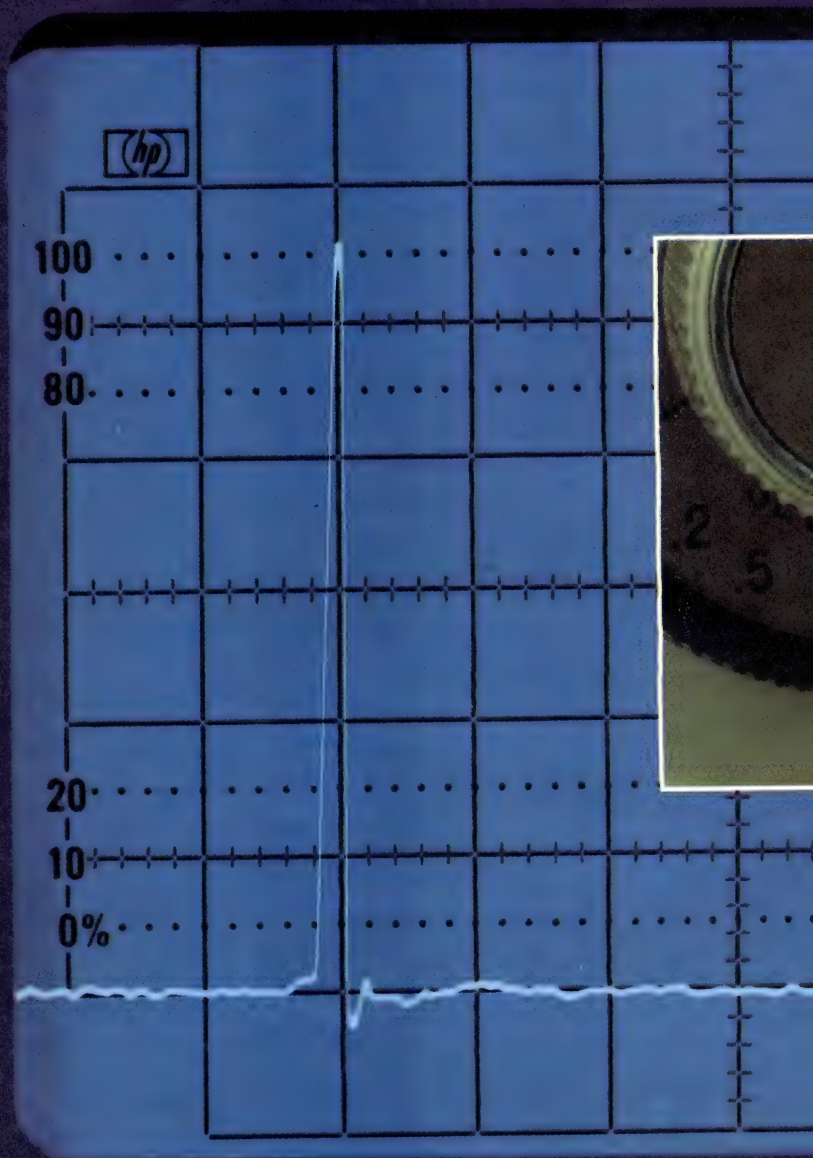

Storage trace as seen using a viewing hood.




# ILLOSCOP PACKARD

## For a 100 MHz storage scope that can capture its bandwidth and display glitches this sharply...

### HP's new 1744A is the Answer.

The key to this storage scope's superior performance is HP's advanced CRT design. It's called Expansion Storage. And this faster-writing technique lets you capture single-shot and low-rep-rate events over a larger display area with greater clarity.

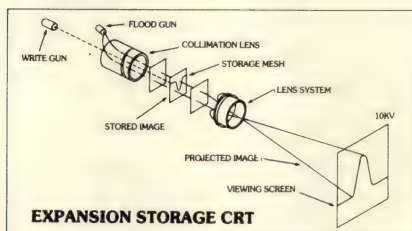

**Take a good, hard look.** Any input signal within bandwidth specification will be displayed cleanly by the 1744A, even at the maximum writing speed of  $1800 \text{ cm}/\mu\text{sec}$  when using a viewing hood. That provides the sharpness you need for detailed evaluation of hard-to-catch waveforms. Our Auto Erase/ provides hands-off operation while Auto Store prepares the scope to snare the troublemaker the instant it occurs. Both are powerful tools for capturing the spurious spikes that disrupt your logic circuitry.

**Catch that glitch.** Expansion Storage technology combines a small storage mesh (about the size of a postage stamp) and an expansion lens system. This exclusive arrangement permits a writing speed of  $1800 \text{ cm}/\mu\text{s}$  and a fine spot size, which lets the

1744A write faster and further than any other 100 MHz storage scope. That gives you full-scan glitch capture capability over a broad range of sweep speeds and repetition rates.

**A new view.** Three channels are better than two. And with the 1744A you have pushbutton selection of a third-channel trigger view. Now you can view timing relationships between the trigger signal and the two vertical channels simultaneously.

Rounding out the 1744A's capabilities are these convenient measurement features: **Easy-IC Probes** to improve closely spaced probe connections and eliminate shorting hazards; a selectable input impedance (1 megohm/50 ohm) for general purpose probing or 50 ohm matching; and measurement sensitivity as low as  $1 \text{ mv/div}$  to 30 MHz on both channels without cascading. Priced at \$5250\*, the 1744A furnishes the state-of-the-art technology and performance needed today in digital design and troubleshooting applications.

For complete details, or for information on the 100 MHz HP 1741A, a lower-cost, high quality scope for applications where an extremely fast writing speed isn't required, write to Hewlett-Packard, 1507 Page Mill Road, Palo Alto, CA 94304. Or call the HP regional office nearest you: East (201) 265-5000, West (213) 970-7500, Midwest (312) 255-9800, South (404) 944-1500, Canada (416) 678-9430.

\*Domestic U.S.A. price only.



## HEWLETT PACKARD

For more information, Circle No 79



# Microcontroller Military Heroes.

## Win your design battles with the single-chip microcontroller solution: Intel's M8048 family.

Expand your military hi/rel applications with our M8048 single-chip microcontroller strategy. For control applications in avionics, guidance and communications, Intel delivers the solution: the M8048, M8748 EPROM and the M8035L will improve the flexibility and reliability of your system with fewer components which enables you to meet reduced space and weight requirements.

Think about it, three totally self-sufficient 8-bit microcontrollers. Cost-effective controller components available now from the company who pioneered the very first military single-chip microcontroller. Intel.

### Each one a proven performer. Begin with our M8048.

When you design Intel's M8048 into advanced military systems, you're making a strategic move. Like our other two family members, it's one of the highest performing controllers you can find... processed and tested to military standards. And screened to full Class B requirements of MIL-STD 883B, Method 5004 and Method 5005.

For component count reduction and faster processing, our M8048 is your solution. This microcontroller contains an 8-bit CPU, 1Kx8 program memory, 64x8 RAM data memory and 27 I/O lines. An 8-bit timer/counter plus onboard oscillator and clock circuits. Intel's M8048 gets you into the 5-volt world with a single power supply, 6MHz speed and -55°C to +125°C operation.

Nowhere will you find a military microcontroller with all these features on one chip... plus Intel's field-proven technological leadership.

### Our M8748 to program yourself.

Need on-chip erasability for easy prototype development? Want design flexibility? A shorter design cycle? Again, Intel delivers the solution: our M8748 user-programmable microcontroller.

The 4MHz EPROM version of our M8048 gives you immediate

mode, but there's a major difference... no program memory.

With our M8035L, you'll have the flexibility to match program requirements with external ROM or EPROM, such as Intel's M2716. The result? A minimum cost system with maximum component performance.

### Development systems for ease of design.

Since Intel is the largest supplier of military microprocessors and microcontrollers, we have the experience to offer all of the development system support necessary for you to start designing today; plus support from our mil-spec RAMs, EPROMs, bipolar PROMs and peripheral devices.

Design with our M8048, M8748 and M8035L as part of your strategy. You'll be the hero with reduced parts count, shorter design times and improved overall system performance.

For more information on Intel's complete family of military microcontroller devices, and development support, contact your local Intel distributor or sales office. Or write Intel Corporation Literature Department, 3065 Bowers Avenue, Santa Clara, CA 95051, or call (408) 987-8080.



feedback during development and preproduction. Once your design is set, you can use the M8048 for volume production. Or you can stay with the M8748 for continued programming flexibility.

### The M8035L, third member of our microcontroller team.

This microcontroller mirrors the M8048 with RAM power down

## intel delivers solutions.

Europe: Intel International, Brussels, Belgium.  
Japan: Intel Japan, Tokyo. United States and Canadian distributors: Alliance, Almac/Stroum, Arrow Electronics, Avnet Electronics, Component Specialties, Hamilton/Avnet, Hamilton/Electro Sales, Harvey, Industrial Components, Pioneer, L.A. Varah, Wyle Distribution Group, Zentronics.

For more information, Circle No 80



# Editor's Choice: New Products

## Self-calibrating RF power meter easily measures insertion loss/gain

Microprocessor control, stored-program memory and additional nonvolatile memory give the Model 4200 RF power meter capabilities not previously available in such instruments. Basically a 200-kHz to 18-GHz autoranging unit, it accepts either its manufacturer's diode sensors (41-4 or 41-5 Series) or a modified General Microwave thermal sensor. The meter's display reads directly in mW,  $\mu$ W, nW, dBm or dBr (relative to an arbitrary reference) and provides a 3½-digit readout of power values as well as 4-digit dB readings, each with 0.01-dB resolution.

### Auto offset and calibration

To correct displayed readings, an automatic panel-operated zero-correction facility stores all zero offsets as a function of range. Additionally, an on-board 1-mW, 50-MHz reference requires only the touch of a panel button to calibrate the power sensor and instrument.

Other convenience features include high- and low-limit operation and a dc-recorder output. Options offer added capabilities, such as IEEE-488-bus compatibility (Option -01) and rechargeable-battery operation (Option -02).

As aids to serviceability, the instrument offers easy access to all pc boards, plug-in interconnecting cables and full active-device socketing. It also includes provisions for using signature analysis as a troubleshooting technique.

### One does the work of two

Conventional setups for mea-



Offering advanced capabilities, Model 4200 RF microwattmeter easily handles insertion-loss and reflection-coefficient tasks.

suring insertion loss (or gain) call for two separate power meters, but one Model 4200 equipped with the second-channel Option -03 handles the job alone. For this purpose, you connect one power sensor to a directional coupler's output test port, set test frequency and level and then read (using Channel 3) the difference in decibels between test-port power and incident power.

Next, replace the power sensor with the device to be measured and connect the sensor to its output. Take another Channel 3 reading; the decibel difference between readings is the device's gain or loss.

Measuring reflection coefficients involves little more difficulty than checking insertion loss and is readily performed by an Option -03-equipped unit. This option also furnishes 2-channel and differential power-measurement capabilities—allowing simultaneous use of two power sensors.

The unit's display can present values from Channel 1, Channel 2 or their difference, expressed

in decibels. You can use two 50 $\Omega$  sensors, one 50 $\Omega$  and one 75 $\Omega$  sensor or a diode and a thermal sensor.

### Square-law response

The diode sensors available from the 4200's manufacturer inherently provide true square-law operation at low levels, and the instrument responds to the true average power of cw, AM, FM and pulsed signals. Above this square-law-response region, diode response gradually tends toward the peak signal value, but even here, the power meter is calibrated to display the true average power of cw or FM signals.

High-power AM or pulsed waveforms require attenuators to buffer the power detector or a directional coupler to implement power sampling.

The basic instrument costs \$1800; \$265 to \$515 each for sensors; \$375 for Option -01; \$495 for Option -02; \$400 for Option -03.

**Boonton Electronics Corp,**  
Rte 287 at Smith Rd, Parsippany, NJ 07054. Phone (201) 887-5110. Circle No 456



From the motion picture "The Graduate," ©1967 Avco-Embassy Pictures Corp.



**"I JUST WANT TO SAY  
ONE WORD TO YOU...  
PLASTICS!"**



# "HITACHI CMOS PLASTICS!"

## INTRODUCING HITACHI CMOS PLASTIC TECHNOLOGY

Now, more than ever before, the world depends on electronic technological advancement to reduce our energy problems. And, we've responded. Through Hitachi CMOS technology.


### "HI-CMOS"

A technology so unique, it's enabled us to combine the low power of CMOS and the high speeds of HMOS with cost-effective NMOS densities.

With the low power of Hitachi CMOS we can now offer high-speed static RAMs in plastic with densities up to 16K.

## CMOS PLASTIC VS. NMOS POWER LIMITS

Hitachi CMOS plastic technology allows plastic packaging of high-speed static RAMs to densities of 64K and beyond, whereas NMOS reaches the limit at 16K.

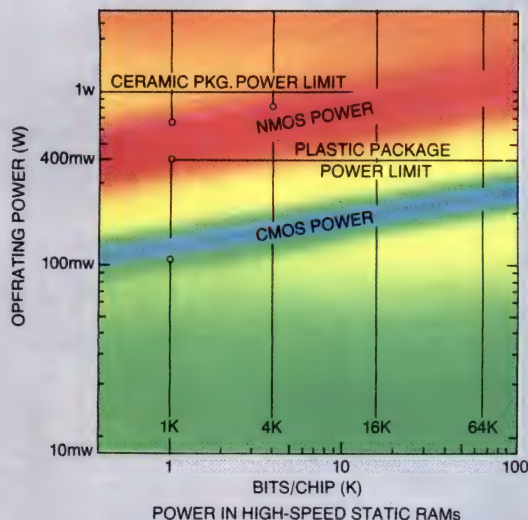

This advanced CMOS plastic technology means you'll need only 200mw to operate our 16K devices compared to the 700mw operating power required by standard 16K NMOS cerdip RAMs.

## MORE REASONS TO CHANGE TO CMOS PLASTIC

Pin-for-pin compatibility. Comparable high speeds. Radically lower-power dissipation. Lower operating temperatures. Reduced need for high-current power supplies. Prices competitive with NMOS cerdip RAMs.

The list goes on, but only you can make the comparison for use in your application.

Part No.	Organization	Speed	Operating Power	Availability
6147	4K x 1	55/70	75mw	Now
6148	1K x 4	55/70	150mw	Samples
6116	2K x 8	120/150/200	200mw	Samples
4334	1K x 4	300/450	20mw	Now
4315	4K x 1	350/450	20mw	Now

The IR100 award winning HM6147 CMOS memory exemplifies this line of state-of-the-art products. A unique combination of high-speed NMOS memory cells and low-power CMOS peripheral circuits yield fast (55ns) access times with the low-power dissipation (75mw) characteristic of CMOS technology.

Compare our plastic packaged HM6147, 4K x 1 CMOS RAM with your present 2147 device. You'll find ours offers unduplicated power advantages plus comparable speeds.

Then compare our HM6148, 1K x 4 with any 2148. Our 55ns access time meets that of your 4K high-speed NMOS static, but only Hitachi adds lower-power characteristics: including 150mw operation and only 5μW during complete standby.

And, our 16K HM6116, 2K x 8 has an address access time of 120ns with low-power dissipation during operation of 200mw, just 20μW during complete standby.

## SAY GOODBYE TO HIGH POWER DISSIPATION PROBLEMS

Just say "HITACHI CMOS PLASTICS" to your Hitachi representative or distributor for data sheets, samples and prices. He'll make delivery, reduced power dissipation and lower cost a sure thing.



**HITACHI**  
Hitachi, Ltd. Tokyo, Japan

## Hitachi. The sure thing.

Hitachi America, Ltd. • Electronic Devices, Sales and Service Division  
707 W. Algonquin Road • Arlington Heights, IL 60005 • (312) 593-7660 • TLX20-6825  
Stocking Distributors: Anthem • Bell • CAM/RPC • Diplomat • Future • Jaco • Marshall • Milgray •  
RC Components • Resco • RM Electronics • Sterling • Time • Western Micro Technology

For more information, Circle No 81





**NCC '80**  
New Directions  
For A New Decade  
Anaheim, CA May 19-22  
See us at NCC  
Booth nos.  
1700, 1701, 1703, 1800

# Break out with our breakthrough

## Add a UDS 103 LP modem to your small system design

- No AC connection
- FCC certified
- Fits under the phone
- \$195 (quantity one)

Add the world's only line-powered modem to your small system design. Forget about AC connections and external power supplies while accessing the whole dial-up telephone network.

Thanks to our breakthrough, the added system cost is only \$195.00 (quantity one) for a fully Bell-compatible,

originate only, Model 103 modem. It gives your system full duplex communications capability at any speed up to 300 bps.

Get in touch with the rest of the datacomm world. Ask for full details from:

Universal Data Systems  
5000 Bradford Drive, Huntsville, AL 35805  
Telephone 205/837-8100  
TWX 810-726-2100

Patent Applied For

"Confidence in Communications"

# Universal Data Systems



For more information, Circle No 82



# μComputerist Corner

## A little hardware single-steps Z80

**Jim Grady**

Hewlett-Packard Co, Waltham, MA


You can implement single-step capability for a Z80  $\mu$ C system with the small amount of hardware shown in **Fig 1** and some support software added to the system's monitor. The hardware generates an interrupt during a program's instruction fetch; the interrupt-service routine stores the processor status, displays it and returns to the system monitor. A single-step command causes the processor to jump to a subroutine that sets the processor to Interrupt Mode 1, restores processor status, enables interrupts, initializes the single-step hardware and returns the processor to the user program, where the cycle repeats.

The single-step hardware consists of a 74LS95 parallel-in/parallel-out 4-bit shift register and a 74LS02 quad 2-input NOR gate. This circuit is

initialized at the end of the single-step subroutine shown in **Fig 2**. An OUT instruction loads a ONE into the shift register's least significant bit ( $Q_A$ ) and a ZERO into the remaining bits. Each falling edge of the Z80's  $\overline{M}_1$  signal shifts the ONE to the right. When  $Q_C$  is a ONE, the CPU is fetching the opcode for the program's next instruction; its output is inverted to generate an active-LOW interrupt-request signal. Z80 instructions having 2-byte opcodes require an additional delay because their fetch cycles encompass two  $\overline{M}_1$  pulses.  $Q_C$  and  $Q_D$  are thus gated together to generate an interrupt when either is a ONE; the interrupt request remains ON until the Int line is tested at the end of the instruction.

If an instruction utilizes only a 1-byte opcode, the prolonged interrupt request doesn't disturb operation because the first instruction of the interrupt-service routine (**Fig 3**) disables interrupts. The interrupt request is cleared when shifted out of the shift register, so disable interrupts during the first

*Continued on pg 101*

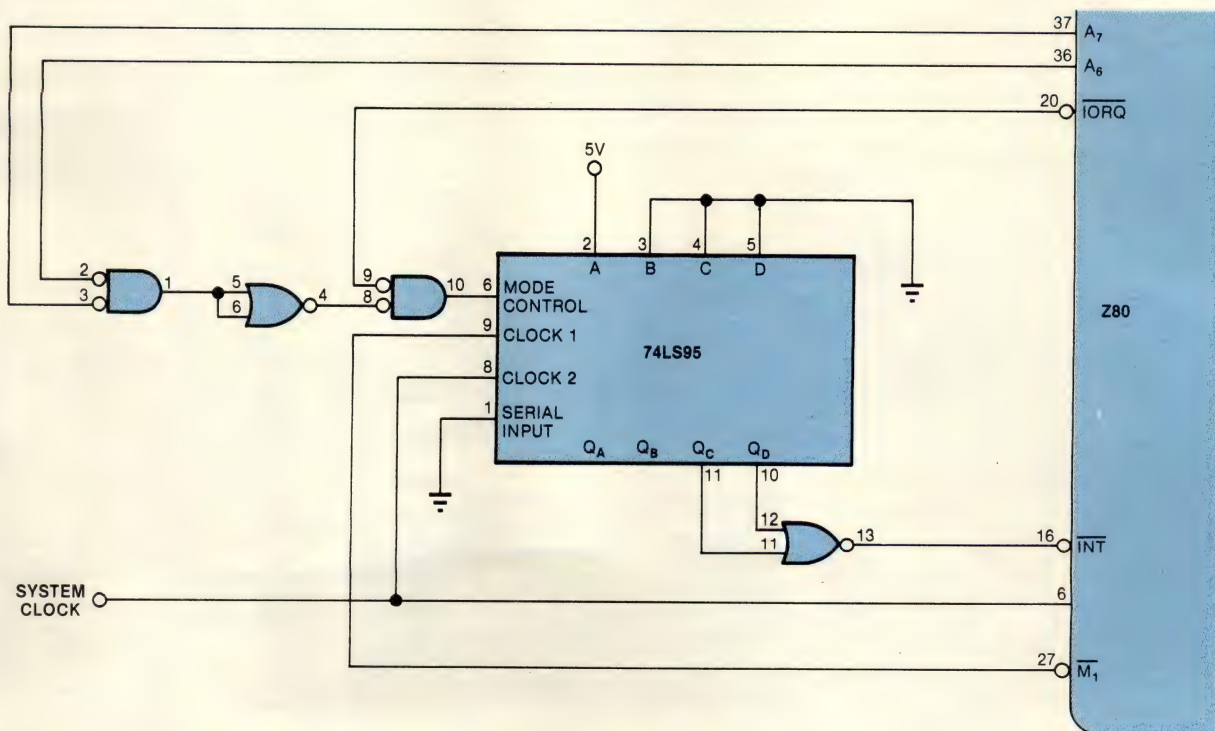

**Fig 1**—Using only Interrupt Mode 1 simplifies the hardware needed to generate an interrupt during an instruction fetch.



# GenRad/Futuredata delivers Intel, Zilog, Motorola, Rockwell, RCA...

## WE SUPPORT MORE CHIPS

When it comes to developing development systems that support more microprocessors, no one can touch us. Our universal development system doesn't box you in with a single chip or chip family. Our system sets you free to design with any or all of the most popular processors.

In your smart-product race through the '80's, switching development systems will be the pits. With our system that won't be necessary.

## WE ADD NEW CHIP SUPPORT FASTER

Thanks to our unique slave emulation system we can add new chips to your system in a matter of weeks. Remember, we don't make the chips – just the development system. And we don't have to redesign our system for each new chip – we just add another slave emulator. And, that's all you pay for. So, we're faster and more economical, too.

## WE SET THE PACE FOR EMULATION

Ours is the only system capable of delivering transparent, non-stop, full-speed emulation

8086  
8085  
8080  
Z8000  
Z80  
6809  
6802  
6801  
6800  
6502  
1802  
3870






# 2300 series

advanced  
development  
systems

to 10 MHz. And it's the only system capable of emulating many different processors simultaneously.

Transparent, non-stop, full-speed emulation takes all the guesswork out of choosing the right microprocessor for your application. It allows you to evaluate each chip thoroughly, accurately and objectively.

The ability to emulate several different chips simultaneously paves the way to development of smart products using more than one processor.

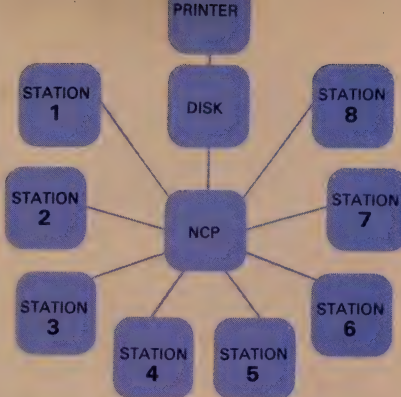

2300 Series multi-station networks share disk and printer with up to eight stations. Each station is universal and may be ordered with the software and/or hardware capabilities required.

## WE DELIVER THE MOST COST-EFFECTIVE SOLUTION

Lower initial cost, universality and expandability make our system a prudent, long-term investment. Any of our systems can be upgraded to network status. By sharing costly and under-utilized resources (disks, printers, emulators, analyzers and even software) you can stop paying your designers to stand in line. Networking can lower your cost-per-station by 20% or more.

## WE'RE HERE TO STAY

There is no finish in the smart-product race. To stay ahead you're going to need flexible, productive, expandable development systems and a supplier with staying power capable of giving you in-depth, after-sale service and support. Ask for a demonstration of the 2300 Series Advanced Development System. Sales and service offices in major cities.


For more information, Circle No 83

## TYPICAL 8086 SNAPSHOT

The 2302 Slave Emulator allows you to view your program in single-step, snapshot or logic analyzer modes. This view can be formatted to match your requirements even for the most complex memory segmentation, interrupt-driven or multi-processor environments.

## WE KEEP YOU IN THE FAST LANE

Our system has been designed to make hardware and software development fast, efficient and productive. With our high-speed CRT, high-level language programming and powerful software, things happen fast – sometimes instantaneously. Now available with highly block structured PASCAL compilers, our system can cut your programming time by 50% or more.

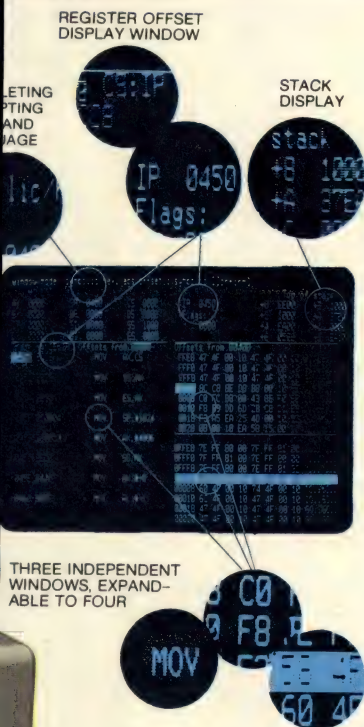

 **GenRad**  
futuredata

GenRad/Futuredata universal development systems – expanding your world of microprocessor-based design.

"See us at Electro '80 in booths 1208-1210-1307-1309."

GenRad/Futuredata  
5730 Buckingham Parkway  
Culver City, CA 90230  
(213) 641-7200. TWX: 910-328-7202.



# Under close analysis, our quality always measures up.

A lot of terminal manufacturers stake a claim to quality. But when you examine their terminals closely, the quality doesn't always pan out.

With Hollingsworth, you can discover quality everywhere you look. We begin with the selection of the best-grade materials. We do testing to make sure they're up to spec.

Then, during manufacture, we continually perform tests on samplings from production runs. We test

for voltage drop, current cycling, tensile strength, salt-spray corrosion and vibration resistance. Our insulated products are further subjected to dielectric withstand, axial load and heat aging tests.

All this means that if you're not dealing with Hollingsworth, you're missing out on a golden opportunity to get quality solderless terminals. Call your Hollingsworth man today. Or write for our catalog and free samples of our terminals. Hollingsworth Solderless Terminal Company, 85 Benjamin Franklin Highway, Pottstown, PA 19464.



# HOLLINGSWORTH®


Atlanta • Boston • Chicago • Cleveland • Dallas • Ft. Lauderdale • Los Angeles • Philadelphia • San Francisco • Seattle • London • Sao Paulo • Toronto

For more information, Circle No 84




## $\mu$ Computerist Corner

four instructions after power-on to clear any ONEs that might remain in the shift register.

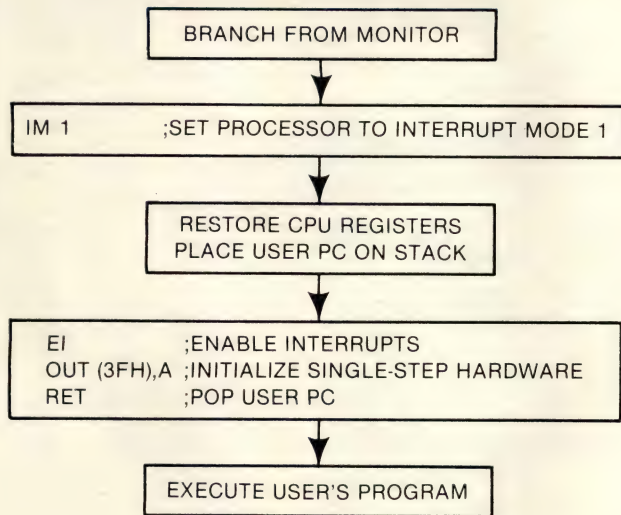

**Fig 2—A single-step subroutine** sets the processor to Interrupt mode, enables interrupts, initializes the associated hardware and returns the processor to the user program.

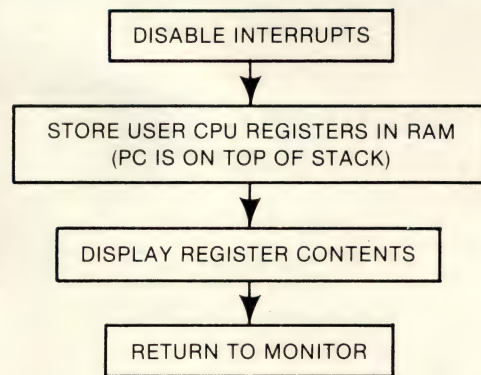

**Fig 3—An interrupt-service routine** stores the processor's status, displays it and returns to the system monitor.

As a result of the desire to provide single-step capability with minimum board space, the hardware required for this approach was minimized by using only the Z80's Interrupt Mode 1 and a simple I/O address-decoding scheme. If you aren't especially concerned about minimizing hardware, you can employ the more flexible Interrupt Mode 2 and add hardware to provide the CPU with the interrupt-service routine's address.

**EDN**

### EDN Software Note #48

## Economical FIFO stack needs two RAM bytes

**Zvi Herman**

Elbit Computers Ltd, Haifa, Israel

The input and output routines shown in Fig 1 implement a FIFO stack that requires only 43 bytes of ROM and two bytes of RAM, in addition to the user-programmable stack. With them, a Z80 with a 2-MHz clock achieves a 43- $\mu$ sec input to the FIFO and a 41.5- $\mu$ sec output time.

The stack design employs two pointers in RAM—FIN and FOUT. The former points to the next available stack location, while the latter points to the location of the next data byte to be read.

Assign the stack space at the beginning of a 256-byte memory block. The routines then treat the stack as a cyclic memory space—you can visualize it as a drum. In line with that analogy (**Fig 2**):

- Initialize FIN and FOUT with the same value, pointing anywhere inside the stack; the pointer

is denoted relative to the beginning of the stack. Equality of FIN and FOUT thus implies that the buffer is empty.

- The first character that arrives goes to the location pointed to by FIN, and FIN is incremented. When another byte arrives, the operation repeats.
- To output from the buffer, the output routine reads the byte in the location pointed to by FOUT, then increments FOUT so it points to the next byte to be read.
- If FIN is incremented more rapidly than FOUT (which means that writing into the FIFO occurs at a higher rate than reading out of it), the buffer becomes full when FOUT leads FIN (around the "drum") by only one location.

The routines use only the pointers' six least significant bits; ignoring the seventh and eighth bits makes them cyclic.

When reading from the FIFO, the output routine





Because ITT is a world leader in capacitor technology, we can back up a variety of styles and dielectrics with years of experience and vast technical resources. Whether you require tantalum, non-PCB type power, metalized film or silvered mica, you are assured of the finest quality because all our capacitors are made to stringent ITT standards. For samples, catalogs, or the name of your nearest supplier, phone (617) 686-1110. Or write: ITT Components, a unit of International Telephone and Telegraph Corporation, 1551 Osgood St., North Andover, MA 01845.

Capacitors from **ITT** Components

Solid tantalum types range from 0.1 to 680  $\mu\text{F}$  with voltages up to 50 Vdc; metalized polyester and polycarbonate film from 0.1 to 10  $\mu\text{F}$  with voltages to 630 Vdc.

For more information, Circle No 85




# **μComputerist Corner**

```

: INPUT TO FIFO
: =====
:
: INPUT: NONE
: OUTPUTS: HL- INPUT ADDRESS
: CALLS: NONE
: DESTROYS: A, HL, F
:
:
: FIFOIN:
LD      HL, (FIN)      ; H=(FOUT), L=(FIN)
LD      A, L
TNC     A
AND     3FH            ; INCREMENT (FIN)
CP      H              ; RESET BITS 5,7 TO MAKE
JP      Z, ERROR       ; IT CYCLIC
;COMPARE WITH (FOUT)
;FIFO IS FULL-JUMP TO
;ERROR ROUTINE
LD      (FIN), A        ;STORE NEW FIN
LD      HL, FIFO        ;GET START OF FIFO -
ADD     L               ;ADD POINTER
LD      L, A            ;HL=POINTER TO RAM
PET

: OUTPUT FROM FIFO
: =====
:
: INPUTS: NONE
: OUTPUTS: HL-OUTPUT ADDRESS
: CALLS: NONE
: DESTROYS: A, HL, F
:
:
: FIFOUT:
LD      HL, (FIN)      ; H=(FOUT), L=(FIN)
LD      A, H
CP      L              ;COMPARE (FOUT)
;WITH (FIN)
JP      Z, FIFOUT-S    ;EMPTY-LOOP
INC     A              ;INCREMENT FOUT
AND     3FH            ;RESET BITS 5,7
LD      (FOUT), A       ;STORE NEW (FOUT)
LD      HL, FIFO        ;GET START OF FIFO
ADD     L
LD      L, A
PET
    
```

**Fig 1—Using only two bytes of RAM, plus the RAM already assigned to the stack, these routines implement storage that acts like a cyclic memory space.**

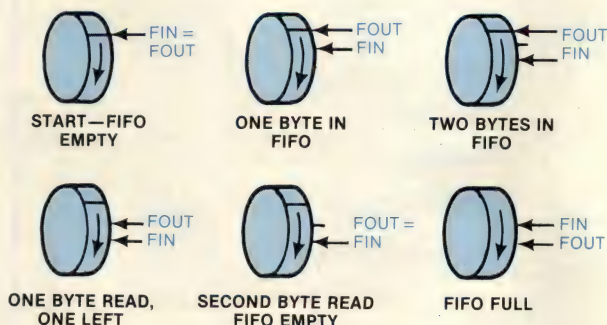


**Fig 2—Two pointers indicate the next available memory location (FIN) and the last-used location (FOUT).**

checks whether FIN equals FOUT. If so, the FIFO is empty; otherwise, FOUT is advanced and the pointer to the RAM constructed. When writing to the FIFO, the input routine checks whether FIN+1 equals FOUT. If so, the FIFO is full; otherwise, FIN is used to construct the RAM pointer. **EDN**


## **THREE NEW HIGH-TECHNOLOGY TELECOMMUNICATIONS RELAYS EXPAND THE BROAD ITT LINE.**

**An ITT Innovation.  
New BZ Relay.**  
Extremely low profile.  
DPDT and 4PDT.  
Flux-free construction.

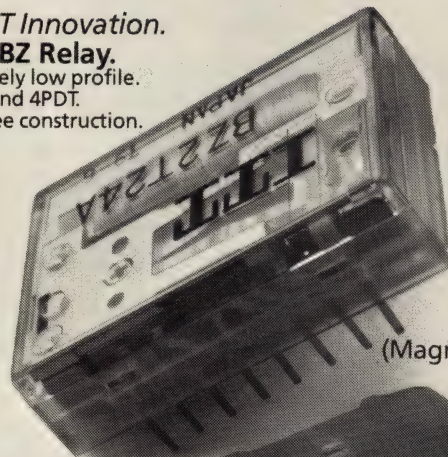

(Magnified 2X)


**An ITT Innovation.  
New SM Relay.**  
Hermetically sealed  
subminiature. DPDT.  
High sensitivity.

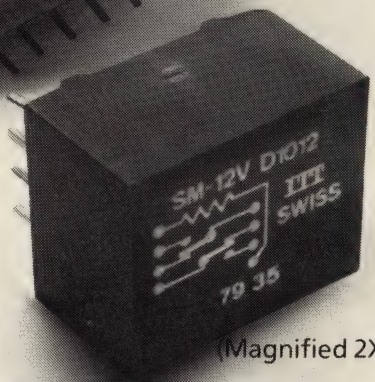

(Magnified 2X)

**An ITT Innovation.  
The much copied  
RZ Relay.**

DPDT.  
Low profile  
Sealed  
option.  
SPDT,  
latching  
version,  
and  
bifurcated  
contacts  
are now  
available.

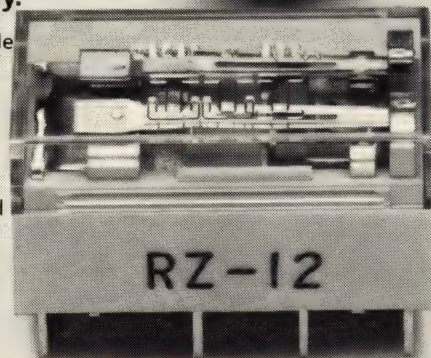

(Magnified 2X)

For samples, our new catalog, and the name of the nearest representative phone Jim Harrison, Relay Marketing Manager (617) 686-1110. Or write: ITT Components, a unit of International Telephone and Telegraph Corporation, 1551 Osgood St., North Andover, MA 01845.


Relays from **ITT** Components

For more information, Circle No 86



**HOWARD® motor-makers**

**do great things with your specs  
for induction drive motors..**

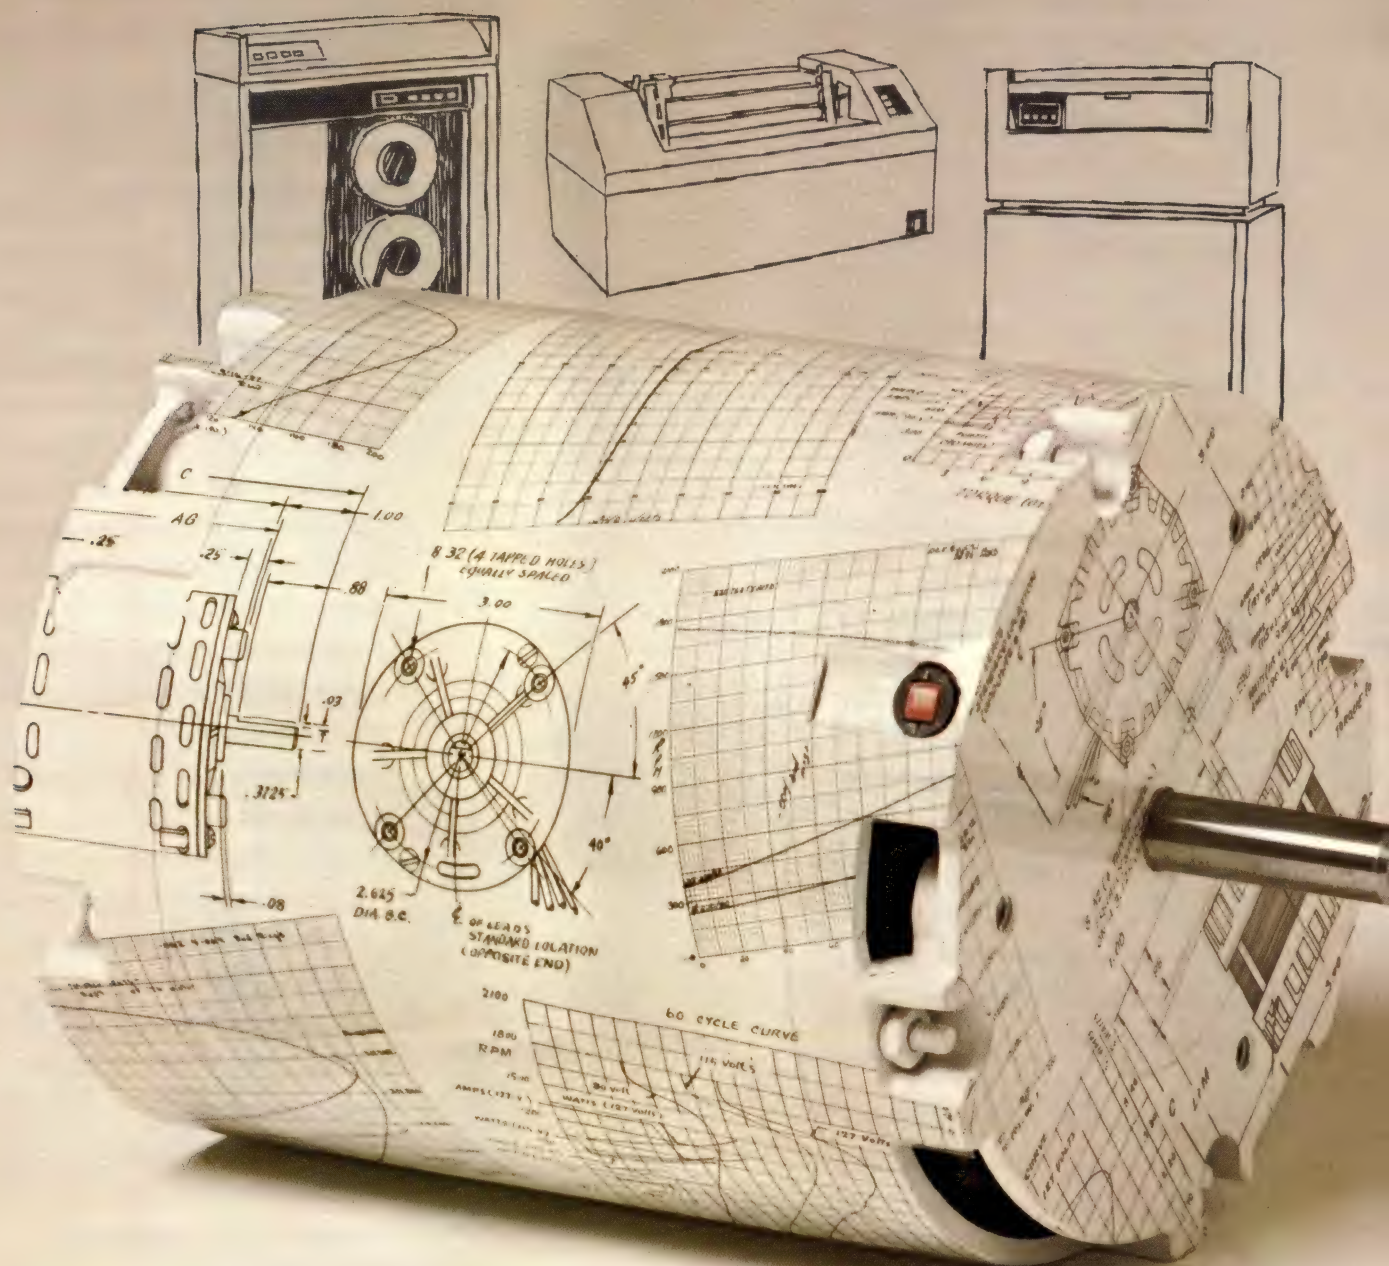



# ..and they price them very, very competitively

When you need an induction drive motor you want it designed exactly as you need it. Without hassles, without design headaches. That's the way Howard's motor-makers operate. They respond to your needs with fast action.


Tough and demanding customers such as IBM, Burroughs, Storage Technology, 3M (as well as scores of others) have found that Howard's engineering flexibility and adaptability makes it easy to get just exactly the induction drive motors they need.

We're small enough to react positively to your development time-tables — big enough and experienced enough (over 11,300,000 motors in the past 10 years) to deliver quality motors at a very competitive price.

Check with Howard's motor-makers for any or all of your induction drive or motor parts sets needs. You'll discover that Howard's custom engineering approach makes your projects go smoother, faster — without paying premium prices.




**WRITE TODAY** for TWO NEW INDUCTION MOTOR CATALOGS that provide torque curves, ratings, dimensional drawings on the complete line of 26, 33, 42, 48 and 56 Frame induction drive motors and motor parts sets.



26 Frame Induction Motor




33 Frame Induction Motor



42 Frame Induction Motor



48 Frame Induction Motor



56 Frame Induction Motor


# HOWARD® POWERED

HOWARD INDUSTRIES • One North Dixie Highway • Milford, Illinois 60953 • Phone: (815) 889-4105  
For more information, Circle No 87



# PANDUIT™ MAS-CON™

## Mass Terminated Connector Assembly System

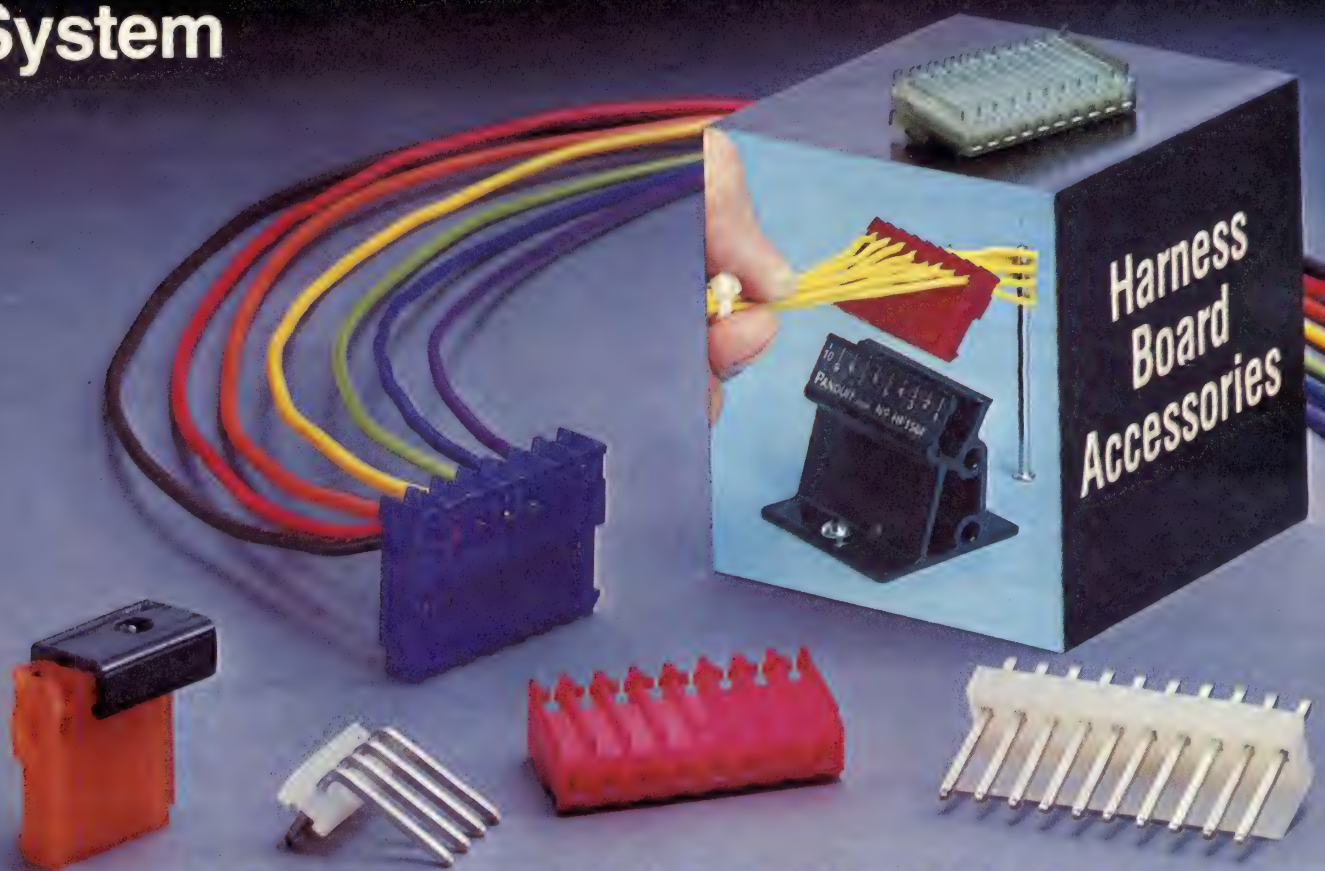

### PANDUIT REDUCES YOUR INSTALLED COST

#### ***Fast, reliable connections with discrete wire and flat cable at low installed cost***

The MAS-CON system mass-terminates both discrete wire and notched flat cable without insulation stripping. No need to crimp or hand load contacts into housings.

Wires snap quickly into unique wire retainers in the connector and are held securely, prior to termination.

Compact, inexpensive, easy-to-use bench presses terminate both through-circuit and end-circuit connectors with discrete wire or flat cable. Interchangeable unit die sets meet all termination and notching requirements.

The versatile MAS-CON system includes: insulation displacement connectors (.100" and .156" centerline spacing); matching header assemblies; harness board accessories; polarizing keys; manual and pneumatic hand tools; bench presses; and unit die sets.


**Immediate shipment from stock.**





**PANDUIT REDUCES YOUR INSTALLED COST**

## DESIGN FEATURES OF MAS-CON<sup>TM</sup> CONNECTORS

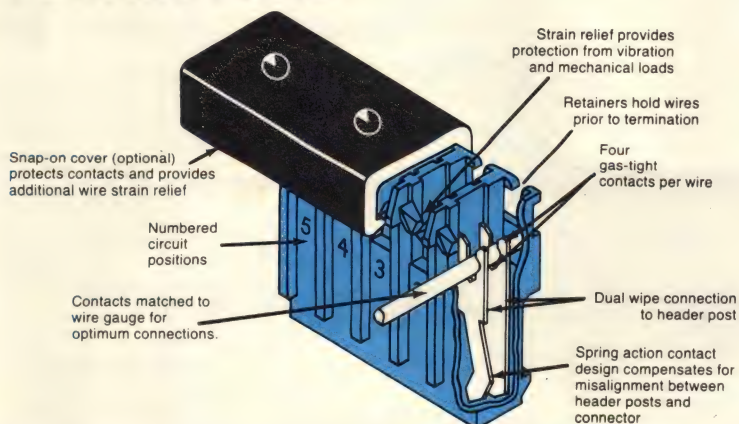

## .100" CENTERLINE CONNECTORS NOW AVAILABLE

Visit Panduit at Electro '80  
Booth 2054-2058

Ask for free demonstration  
and cost analysis.

## FREE SAMPLES

The Reliables... Wherever Electricity is Used



ELECTRONIC PRODUCTS GROUP

Tinley Park, IL 60477 • Phone: (312) 532-1800  
In Canada: Panduit (Canada) Limited



# What makes GE thin edgewise instrument readings so accurate?

## Alnico 8 power.



A high strength Alnico 8 magnet puts extra torque into every mechanism. This makes GE thin edgewise instruments less susceptible to reading errors caused by friction or static. They will continue to meet or exceed all applicable ANSI C39.1 specifications for years.

Available in both vertical and horizontal models, these compact instruments save valuable panel space in all three sizes — 1½, 2½, and 3½ inches. All are attractively housed in virtually unbreakable LEXAN® resin cases. General Electric thin edgewise instruments are interchangeable with most competitive models and are easily modified for special applications.

For full information on General Electric's complete line of ac and dc thin edgewise ammeters (from microamps up) and voltmeters (from millivolts up), write to Section 592-94, General Electric Co., Schenectady, NY 12345, or call your nearest GE sales office or distributor.

**There's more  
to any GE instrument  
than meets the eye.**

**GENERAL  ELECTRIC**

For more information, Circle No 89



# A Question of Law

## When a noncompetition agreement limits an ex-employee's business activities

**Professor H Newcomb Morse**  
Pepperdine University, Malibu, CA

Can a company's noncompetition agreement prevent a former employee from working in the same field for a different firm?

In the early 1970s, Electronic Data Systems Corporation (EDS) brought suit in US District Court for the Northern District of Texas. The suit sought to compel a former employee, Frederick A Kinder Jr, to comply with an agreement not to engage in competition with EDS after termination of his employment with the company. Kinder counter-claimed for a bonus of \$2500, which he asserted was never paid him, and for additional wages he maintained he was entitled to.

At the trial of the suit, the evidence disclosed that since 1962, EDS had performed data-processing services consisting primarily of formulating computer programming systems and using these systems to solve the problems of its clients. A successful data-processing firm maintaining offices in 22 cities and servicing clients throughout the US, the company attributed its success, at least in part, to the formulation and development of computer programs that it considered superior to those of its competitors. Specifically, EDS claimed that its programs were more efficient, resulting in faster and lower cost services to its clients.

### EDS safeguards programming methods

To perpetuate its success, EDS had made substantial efforts to prevent information concerning its programming methods from becoming known and used by its competitors. For example, it retained ownership of the processing systems rather than selling them to its customers, maintaining the documentation of the systems in confidence and contractually binding the customers for a minimum of 5 yrs from disclosing information about the systems. It also added to employment agreements covenants that prevented employees from engaging in competition with it. Specifically, the pertinent covenants stated that for 3 yrs after termination of employment with EDS, former employees would not engage in the following conduct:

"(i) Recruit, hire, assist others in recruiting or hiring, discuss employment with or refer to others concerning employment, any person who is, or within the then preceding 12 months was, an employee of EDS or any subsidiary or affiliated company, or of any present, prospective or former customer of EDS or any subsidiary or affiliated company, (ii) compete with EDS or any subsidiary or affiliated company within 200 mi of any city in the United States in which EDS or any subsidiary or affiliated company does business, or (iii) use in competition with EDS or any subsidiary or affiliated company or customer prospective customer or former customer, any of the methods, information or systems developed by EDS or any subsidiary or affiliated company or its customers, prospective customers, or former customers within 200 mi of any city where such customer, prospective customer or former customer does business."

### Kinder signs noncompetition agreement

After receiving about 4 yrs of training and experience in data processing while he served in the US Marines, Kinder went to work for EDS and signed an employment agreement containing the foregoing covenants. While he was employed at EDS, he became familiar with the processing of health-care claims and was instrumental in the development of a new system for processing such claims. This system, EDS contended, greatly facilitated the processing of these claims and additionally constituted a confidential competitive advantage that the firm maintained over its business rivals.


After leaving EDS, Kinder went to work for Systems Research Inc (SRI). In the course of his employment with SRI, he became involved in business operations involving health-care claims. Stationed in Kansas City, MO, he acted as an intermediary between the Kansas City Blue Shield, a customer of SRI, and the SRI data-processing offices in Dallas, TX.

Kinder's work consisted of solving the daily problems encountered in processing health-care claims and in making recommendations for solving processing problems to the Dallas office. Additionally, he participated in discussions with prospective customers, explaining the virtues of SRI's data-





# CM-600 Circuit Mount

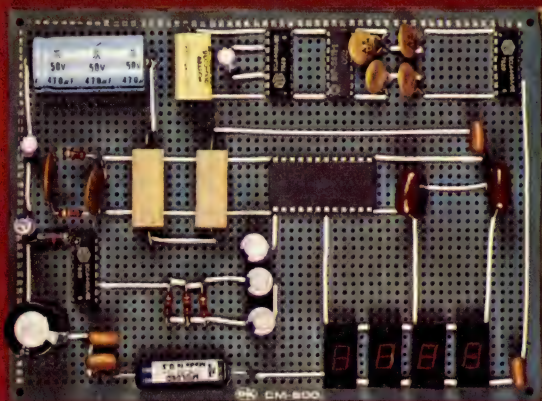

CM-600 \$6.95\*  
RW-50 \$2.98\*

## NEW CM-600 SOLDERLESS PROTOTYPE BOARD

CM-600 is a unique system for solderless construction of circuit prototypes, useful to both engineers and hobbyists. The CM-600 is a neoprene board  $4\frac{1}{2}$ " (114mm) x 6" (152mm) with 2280 holes on .100" (2.54mm) centers. Standard components including DIP's are mounted by simply inserting leads into the holes in the long life neoprene material. Interconnections are easily made using 20 or 22 AWG (0.8 or 0.65mm) wire jumpers. Positive contact is assured by the elasticity of the hole, which compresses the leads together. To remove components or leads, simply pull out. This facilitates easy circuit changes making it ideal for breadboarding experimental circuits. CM-600 also features numbered rows and columns for easy reference.

Accessory Kit RW-50 contains 50 pcs of AWG 20 (0.8mm) insulated jumper wires of assorted lengths from  $\frac{1}{2}$ " (13mm) to 4" (100mm). Both ends are stripped and bent 90° for easy insertion. In stock directly from

**OK Machine & Tool Corporation**  
3455 Conner St., Bronx, N.Y. 10475 U.S.A.  
Tel. (212) 994-6600 Telex 125091

\*Minimum billings \$25.00, add shipping charge \$2.00  
New York State residents add applicable tax



## A Question of Law

processing services in an attempt to attract business.

It was this involvement in SRI's health-care-processing business, EDS contended, that constituted competition with EDS in violation of the covenants not to compete. Kinder should thus be enjoined by the Court from so acting, EDS maintained.

EDS' contention was partially upheld in 1973 by the US District Court, which issued an injunction, but only to the extent of enjoining Kinder from soliciting the employees of EDS to work for SRI. While it denied Kinder's request for the claimed additional wages, the Court concluded that he was entitled to the \$2500 bonus.

EDS appealed the decision to the Court of Appeals for the Fifth Circuit. In 1974, that body affirmed the decree of the District Court, stating: "We believe that the limited injunctive relief granted by the District Court is fully adequate for the protection of plaintiff's [EDS'] business. There is no evidence that Kinder ever disclosed to anyone, or used in competition against his former employer, any confidential information obtained in the course of his employment with EDS. Indeed, SRI does not use EDS' highly prized, confidential system for processing its health-care claims, but uses instead a system called the 'Model System' for processing these claims that is formulated and made available by the government to any person or firm engaged in this type of data processing. As EDS attributes so much of its business success to the confidential nature of its superior processing systems, its business is adequately protected, because none of this information has ever been disclosed by Kinder. Expanding the injunctive relief now is unnecessary for protection of plaintiff's business.

"Even though the restrictive covenants proscribed mere competition apart from the disclosure or use of any confidential information obtained as a result of Kinder's employment, the injunctive relief granted is adequate. The meaning of the term 'competition' in the context of these restrictive covenants must be determined in light of the fundamental policy underlying the imposition of such restrictions. While Kinder was involved generally in the processing of health-care claims and had some dealings with prospective customers, this conduct alone is not a threat to plaintiff's confidential system for processing health claims. Kinder's employment with SRI consisted simply of his acting in a general capacity as a data processor. To restrict him from such employment is not only unnecessary for the protection of the business of EDS, but also is an unwarranted limitation on Kinder's freedom to work as a data processor."

**EDN**



## BW-2630 Battery Tool



BW-2630 \$19.85\*  
BT-30 \$ 3.95\*  
BT-2628 \$ 7.95\*

### BW-2630 BATTERY TOOL

The new BW-2630 is a revolutionary battery powered wire-wrapping tool. The tool operates on 2 standard "C" size NiCad batteries (not included) and accepts either of two specially designed bits. Bit model BT-30 is for wrapping 30 AWG wire onto .025" square pins; BT-2628 wraps 26-28 AWG wire. Both produce the preferred "modified" wrap.

Designed for the serious amateur, BW-2630 even includes both positive indexing and anti-overwrapping mechanisms — features usually found only in industrial tools costing five times as much. Pistol grip design and rugged ABS construction assure performance and durability. In stock at local electronic retailers or directly from

#### **OK Machine & Tool Corporation**

3455 Conner St., Bronx, N.Y. 10475 U.S.A.


Tel. (212) 994-6600 Telex 125091

Minimum billings \$25.00, add shipping charge \$2.00  
New York State residents add applicable tax









# Managing the unmanageable: 57 tons of engineering data-- cataloged, collated, cross-indexed and cross-referenced for you. That's *processed* information.

Any number of companies would like to help you with your information processing.

But only Information Handling Services provides you *processed* information . . . engineering data that's already been cataloged, collated, cross-indexed and cross-referenced for you. So that when you need one important catalog page, Industry Standard, Mil Spec or Government Spec, you can get it. Faster than with any comparable system in the world.

In other words, what you get from Information Handling Services isn't hardware that helps process data.

It's processed engineering data, presented in a useful, usable form.

## **The most comprehensive engineering data base in the world.**

We've been gathering and distributing engineering data for over twenty years. In the industrial area alone, we currently have over 23,000 different manufacturers' catalogs. Plus the most comprehensive collection of Military Specs in the world. Along with 90% of the world's most important Industry Standards. In fact, our total data base now incorporates more than 8,000,000 pages of technical information.

## **Fast, easy access.**

Even more important, we've organized all this information into a system that delivers fast access. All you do is identify the product in which you're interested. Our unique Locator Index then directs you to the catalogs you need, to all appropriate Industry Codes and Standards, to Government and Military Specifications, even to International Standards. In minutes.

## **One thousand people working for you.**

Information Handling Services does a better job of providing you with *processed* information, because we originated Visual Search Microfilm Files (VSMF). Today, our engineers spend tens of thousands of manhours each year simply organizing and cataloging technical data, to make it easier for you to use. For that matter, we have more than 1100 employees now producing a wide variety of information services ranging from manufacturers' catalogs to Military Specifications and Standards, and from an Industry Standards service to Federal Documents, including the Code of Federal Regulations.

## **Interested?**

Find out for yourself the difference between information processing and *processed* information. We have a complete information package that will give you more details, and that can help you determine which of our many information services might best relate to your work. Just write: Dept. 480, 15 Inverness Way East, Englewood, CO 80150. Or call (toll free) 1-800-821-2280, ext. 302 (in Missouri, call 1-800-892-7655, ext. 302.)

**Not information processing,  
but *processed* information.**




**Information Handling Services**

An Indian Head Company

*For more information, Circle No 92*



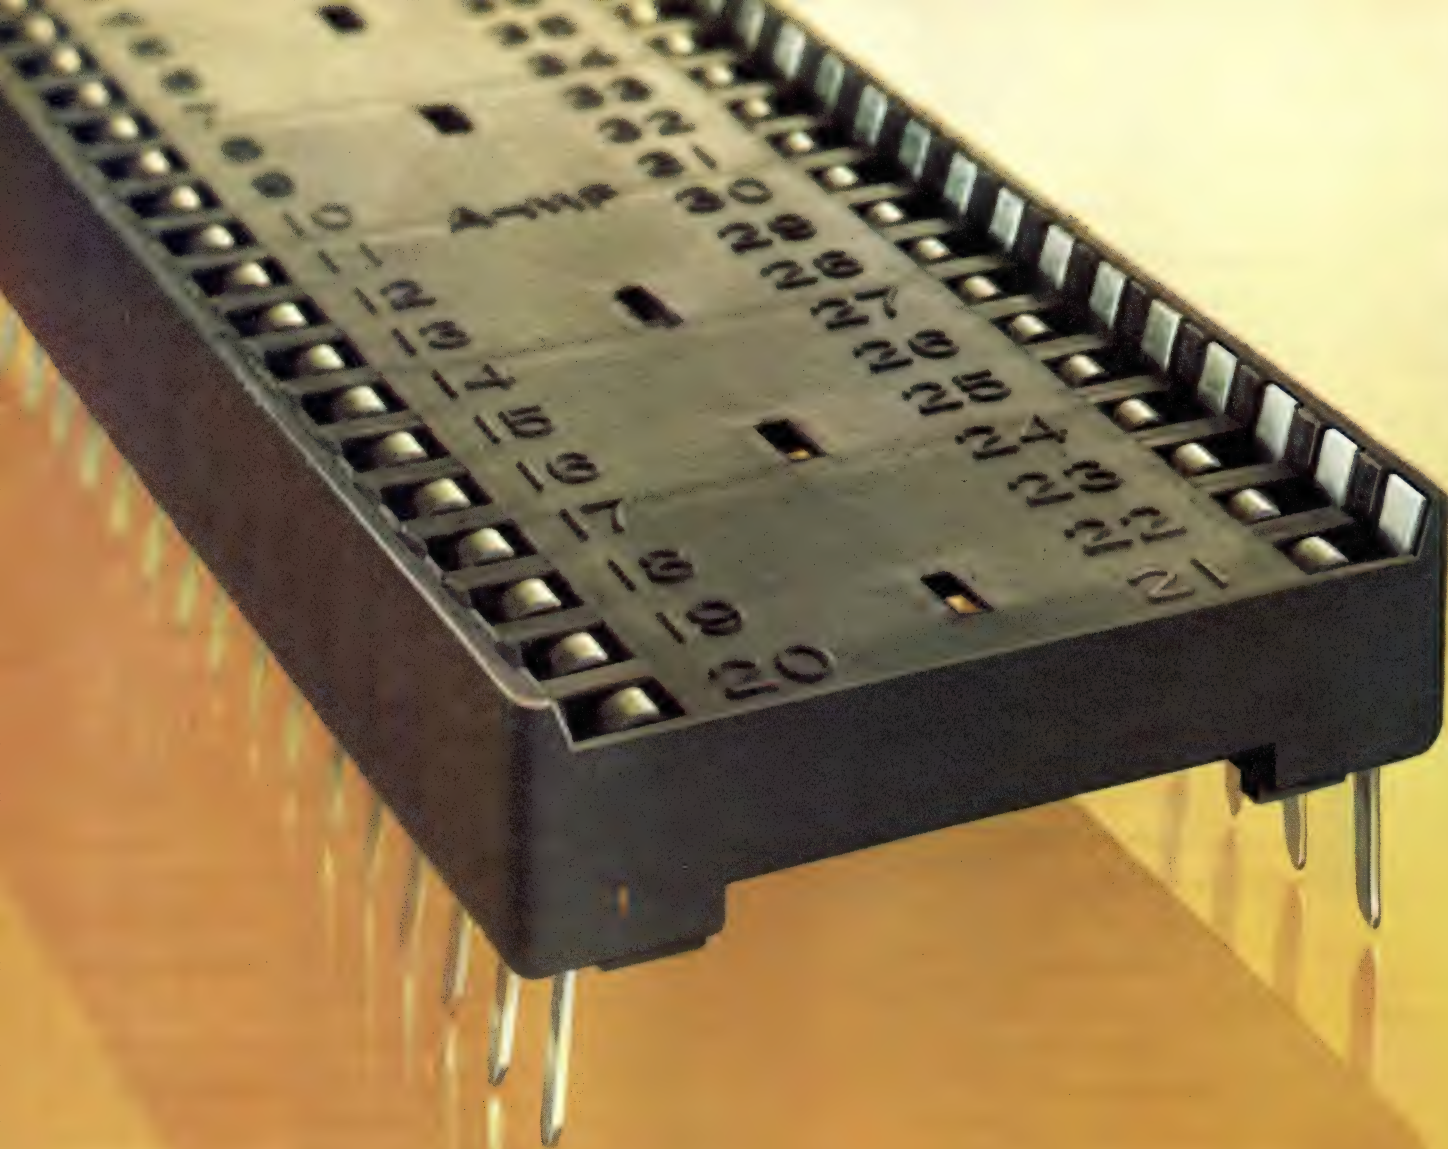


# "For engineers who want all

## **AMP DIPLOMATE 175 Sockets feature:**


- 8 to 40 position sizes
- reliable interconnect in tin or select-gold plate
- large entry target area
- dual wipe contacts
- internal contact anti-overstress stop wall
- closed bottom design
- compatibility with automatic insertion equipment
- immediate delivery via a computer-linked regional inventory system

For the delivery details or for more information, call the DIPLOMATE .175" Profile Socket Information Desk at (717) 780-8400. Or write us. AMP Incorporated, Harrisburg, PA 17105.


AMP & DIPLOMATE are trademarks of AMP Incorporated.

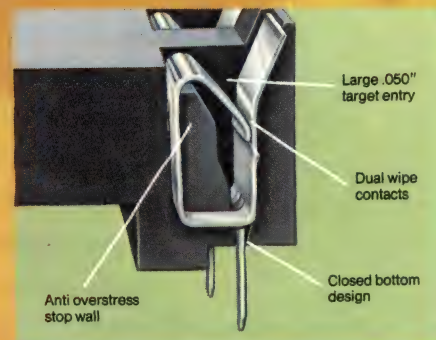



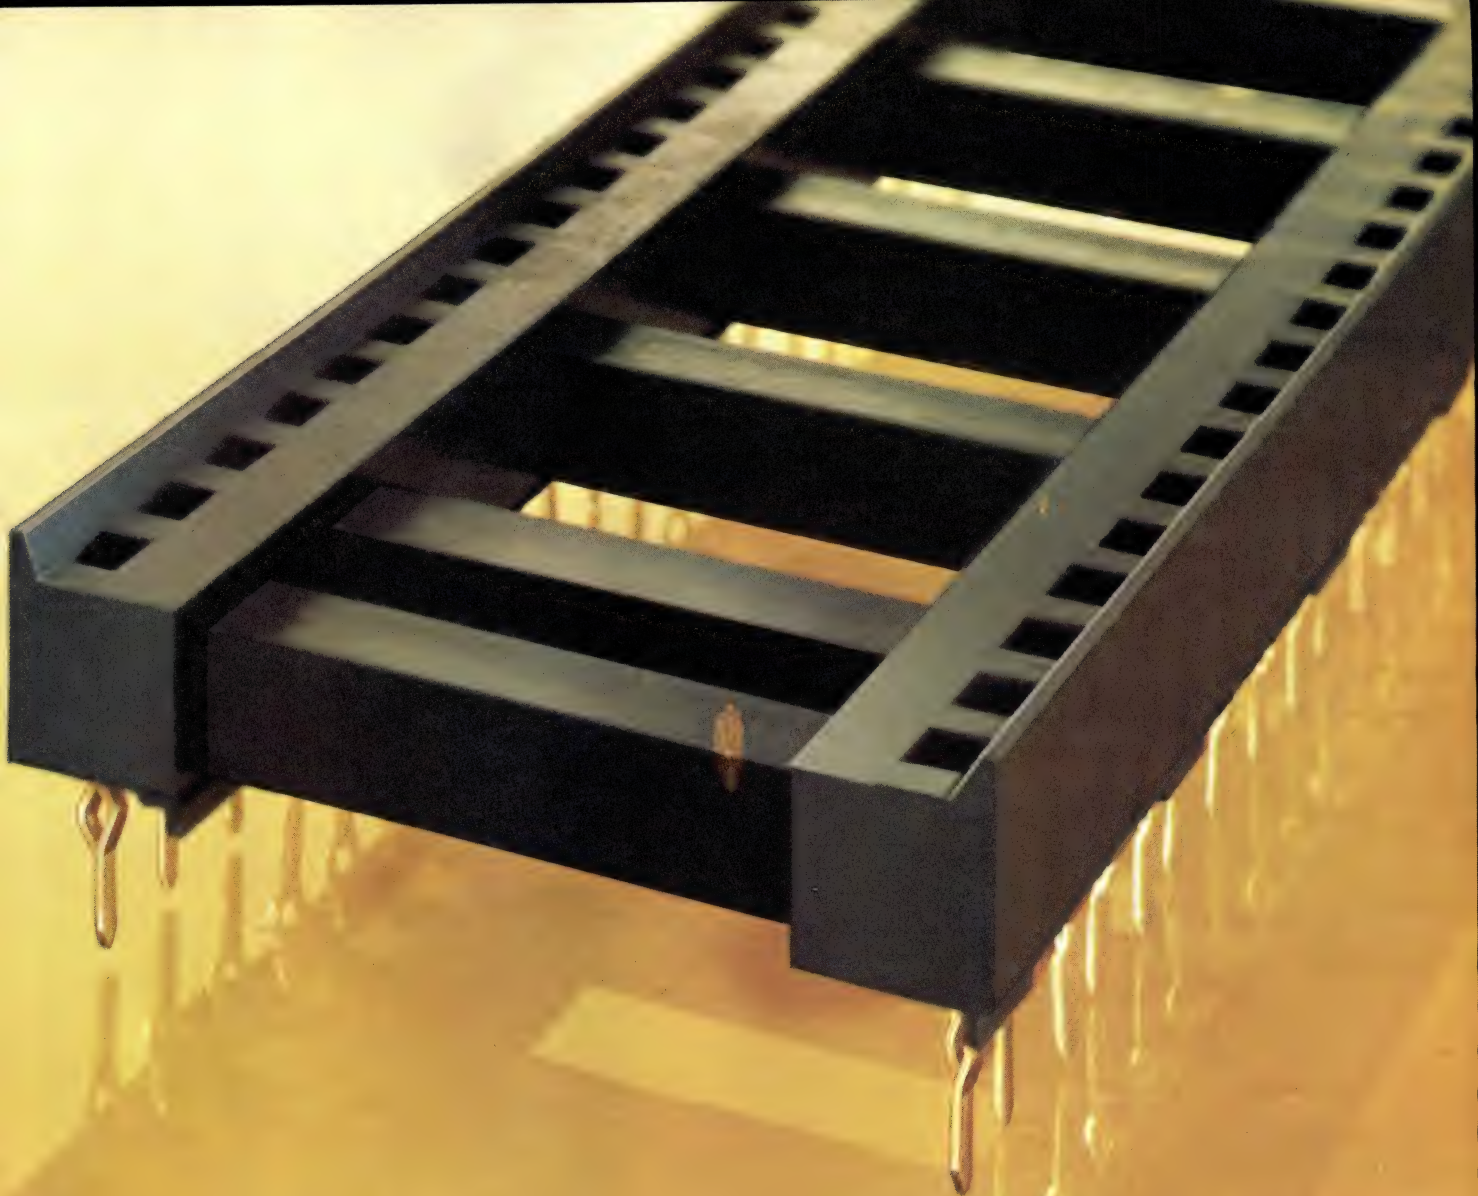

# the best features-plus choice."

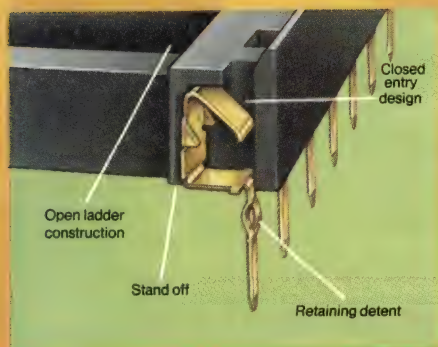

## AMP 160 Sockets feature:

- 8 to 44 position sizes
- lowest economical profile available (.160 ins.)
- anti-wicking, anti-bridging contact design
- ladder housing construction
- tin or select-gold plated contacts
- single row versions for packages with non-standard spacings
- qualification to MIL-S 83734

For the delivery details or for more information, call the AMP .160" Profile Socket Information Desk at (717) 780-8400. Or write us. AMP Incorporated, Harrisburg, PA 17105.

AMP has a better way.


# AMP

For more information, Circle No 93



# Electro/80

*As Boston braces for the first Electro bash of the '80s, the focus is on gate arrays,  $\mu$ Cs and their LSI peripherals, and  $\mu$ P-based instrumentation.*

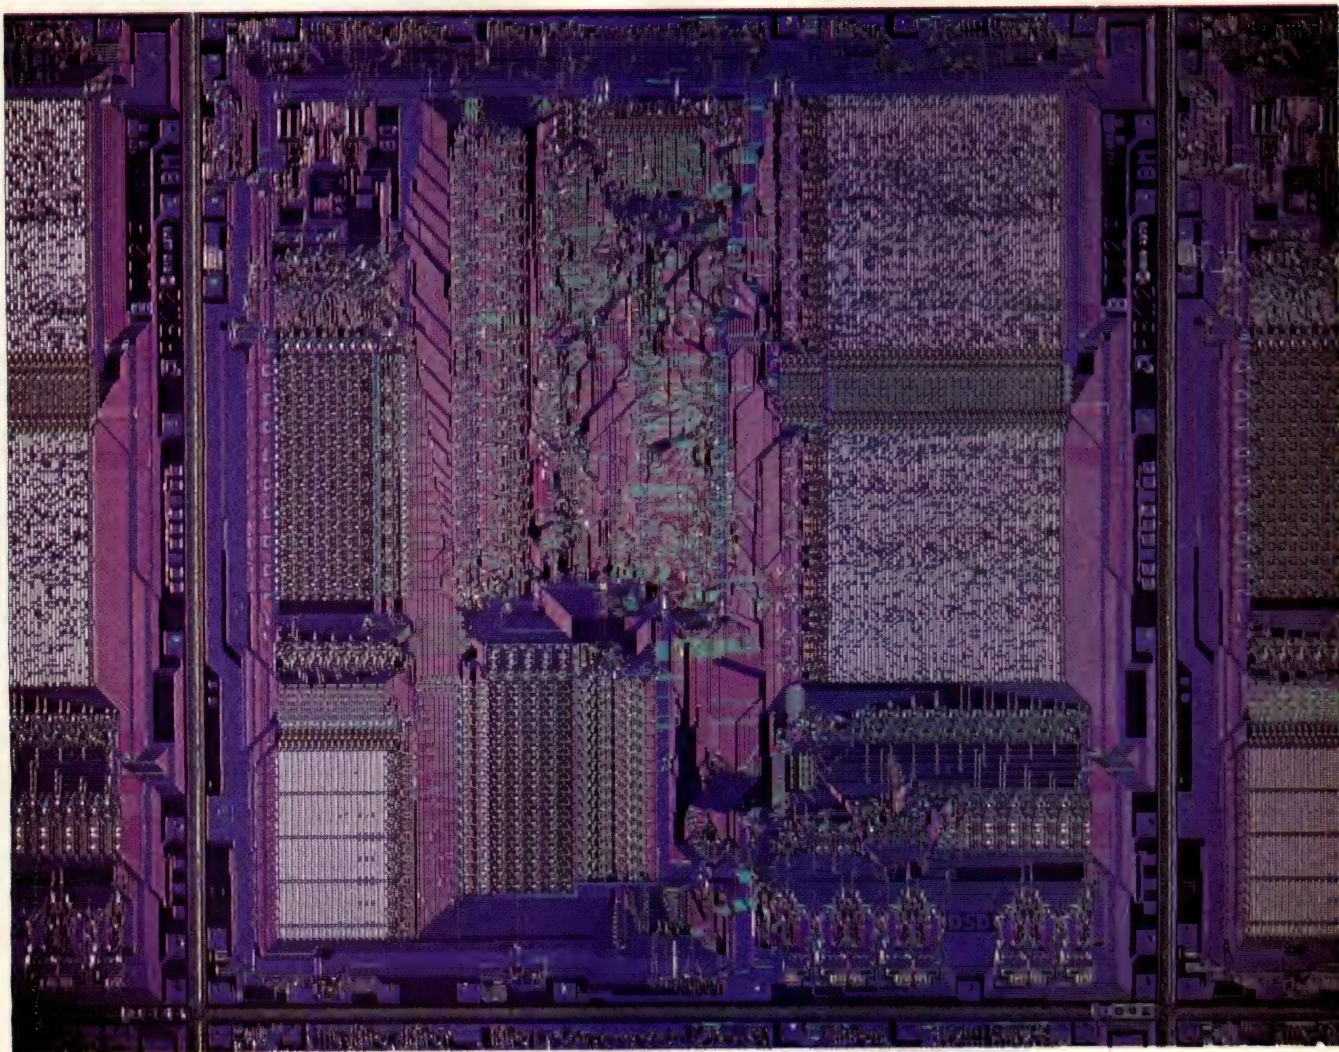

**Are single-chip floating-point processors like the Advanced Micro Devices Am9512 the wave of the future in  $\mu$ C systems? Find out in Electro/80 session 14.**

**John Tsantes**, Eastern Editor

With the theme "Electronics Leads The Way," the first Electro of the '80s will offer attendees the chance to examine emerging technology in all areas of electronics. Electro/80's more than 120 technical and professional presentations, however, will place particular emphasis on microcomputers,  $\mu$ P-related LSI devices and instrumentation.

Highlights among these presentations include:

- A look at the latest developments in gate arrays, stressing those devices' advantages over such alternative approaches as bipolar bit slices and custom LSI parts
- An examination of the growing trend toward single-chip floating-point processors
- An overview of the current status of  $\mu$ P-memory technology, with special emphasis on nonvolatile devices
- A report on  $\mu$ P-based instrumentation



# Leading the way toward tomorrow's electronics

## Schedule details for Electro/80

Electro/80 will take place in Boston on May 13 to 15. All technical sessions will be held in the Sheraton Boston Hotel, between 9 AM and 5 PM; exhibits in the nearby Hynes Auditorium will run from 9 AM to 6 PM on May 13 and 14 and 9 AM to 5 PM on May 15.

In the interests of greater flexibility, Electro/80 will present three blocks of professional sessions

each day—a departure from the traditional 2-per-day blocks. Show officials feel that the new format will allow registrants to attend a greater variety of discussions and avoid potential conflicts.

Daniel Carroll, president of Gould Inc, will deliver the Electro keynote address at a noon gathering on Monday, May 12, in the Sheraton Boston Hotel. He is

expected to discuss opportunities in the electronics industry, with reference to Gould's activities.

For additional information, contact the Electro office at 999 N Sepulveda Blvd, Suite 410, El Segundo, CA 90945; phone (213) 772-2965. Electro's Boston office is at 1387 Washington St, West Newton, MA 02165; phone (617) 527-6944.

ELECTRO/80 — PROFESSIONAL PROGRAM SCHEDULE

	GRAND BALLROOM	CONSTITUTION BALLROOM	REPUBLIC BALLROOM	INDEPENDENCE BALLROOM
TUES MAY 13 9:00 TO 11:00 AM	1 PERSONAL COMPUTERS IN OEM, SCIENTIFIC AND INDUSTRIAL	2 INTEGRATED SOLID-STATE MICROWAVE-AMPLIFIER DESIGN	3 IEEE-488: USER FUNDAMENTALS	4 STATE-OF-THE-ART DATA-ACQUISITION SYSTEMS
TUES MAY 13 12:00 TO 2:00 PM		5 RECENT DEVELOPMENTS IN COMMUNICATIONS RECEIVERS	6 IEEE-488 CASE HISTORIES: PROGRESS AND PROBLEMS	7 NEW ADVANCES IN FLOPPY-DISC TECHNOLOGY
TUES MAY 13 3:00 TO 5:00 PM		8 CURRENT DEVELOPMENTS AND APPLICATIONS IN THE RF POWER-DEVICE FIELD	9 THE FUTURE OF INTELLIGENT MEASUREMENT INSTRUMENTS AND SYSTEMS	10 THE INFLUX OF SOLID-STATE MEMORY INTO BULK-STORAGE APPLICATIONS
WED MAY 14 9:00 TO 11:00 AM	11 MEMORIES FOR MICROPROCESSORS	12 APPLYING THE NEW GENERATION OF ANALOG COMPUTATIONAL ICs	13 STARTING AND OPERATING A SMALL HIGH-TECHNOLOGY BUSINESS	14 HARDWARE ALTERNATIVES FOR FLOATING-POINT PROCESSING
WED MAY 14 12:00 TO 2:00 PM	15 A TURNING POINT IN ENGINEERING EDUCATION (PANEL DISCUSSION)	16 THE FRONTIERS OF HIGH-TEMPERATURE ELECTRONICS	17 TECHNIQUES FOR BRIDGING THE GAP BETWEEN LINEAR APPLICATIONS AND THE MICROCOMPUTER	18 FLOATING-POINT STANDARDS FOR MICROS AND MINIS
WED MAY 14 3:00 TO 5:00 PM	19 ADVANCED ARCHITECTURES: HARDWARE AND SOFTWARE CONSIDERATIONS FOR THE NEW 16-BIT MICROPROCESSORS	20 A/D- AND D/A-CONVERTER TECHNOLOGY	21 NEW IDEAS FOR ENGINEERING MANAGERS	22 HIGH-PERFORMANCE DIGITAL GATE ARRAYS — STRUCTURE, DESIGN METHODOLOGY AND APPLICATIONS
THURS MAY 15 9:00 TO 11:00 AM	23 EVOLUTION OR REVOLUTION TO NEXT-GENERATION DEVELOPMENT SYSTEMS?	24 FIBER-OPTIC COMMUNICATIONS SYSTEMS: CURRENT STATUS	25 NEW BIPOLAR CIRCUITS ENHANCE HIGH-PERFORMANCE MICROPROGRAMMED BIT-SLICE MACHINE DESIGN	26 ARRAY-PROCESSOR ARCHITECTURE
THURS MAY 15 12:00 TO 2:00 PM	27 BUT HOW DOES YOUR MICRO-PROCESSOR DEVELOPMENT SYSTEM DEVELOP MY SYSTEM	28 FIBER-OPTIC DATA-BUS STATUS AND APPLICATIONS	29 TOTAL SOLUTION ON A SINGLE CHIP	30 INTERDEVICE COMMUNICATIONS AND BUS ARCHITECTURE
THURS MAY 15 3:00 TO 5:00 PM	31 MICROCOMPUTER LANGUAGES FOR THE '80s	32 STATIC PROTECTION OF HIGH-CIRCUIT-DENSITY COMPONENTS AND ASSEMBLIES	33 SINGLE-CHIP MICROCOMPUTERS AS SYSTEM COMPONENTS	34 DIGITAL IN THE TELEPHONE-SUBSCRIBER-LOOP PLANT

- An analysis of the state of the art in single-chip  $\mu$ Cs.

### Gate arrays mature

With both manufacturers and users paying greater attention to high-performance gate arrays (EDN, April 5, pg 88), **session 22** ("High-Performance Digital Gate Arrays—Structure, Design Methodology and Applications") should prove particularly enlightening. Gate arrays are now mature LSI circuit-design

elements that offer architectural flexibility, fast manufacturing turnaround and high probability of first-pass design success.

**Session 22** will focus on the structure, characteristics and applications of several digital high-performance gate-array units. Chaired by Stephen Lau, marketing manager for custom LSI at Signetics Corp, Sunnyvale, CA, this session will include papers on gate-array power/speed tradeoffs, a fast-turnaround system for a 400-gate array and the use of high-performance,




low-power Schottky arrays.


One of the session's papers, "F300 Advanced Gate Array Offering Power/Delay Tradeoffs," will tout the advantages of using these devices rather than custom LSI in highly complex low-volume applications. According to author Tom Goodman, manager of bipolar-LSI logic marketing at Fairchild Semiconductor, Mt View, CA, today's very fast computing systems call for the shortest possible logic-state delays and consequently the fastest possible switching circuits. But increasing density and reducing gate delays in conventional LSI components might not by themselves prove adequate to meet these needs; Goodman feels that reducing the number of interconnects in a computing system via gate arrays will also play a part (Fig 1). Fairchild's F300, for example, offers the equivalent complexity of approximately 2000 gates with delays as short as 400 psec.

But why employ gate arrays rather than bipolar bit slices or dedicated custom-LSI designs? Bit slices satisfy the LSI requirements of some applications and might offer significant cost advantages compared with custom designs or LSI arrays, but they frequently don't suit the architectural partitioning requirements of very fast systems, says Goodman. In many applications, using standard bit slices might actually produce slower computing systems than using SSI and MSI devices.


Dedicated custom-LSI designs, on the other hand, are tailored to specific system requirements and provide the ultimate in speed and power efficiency. However, the time and money required for their development (as high as \$150,000 for each circuit) can

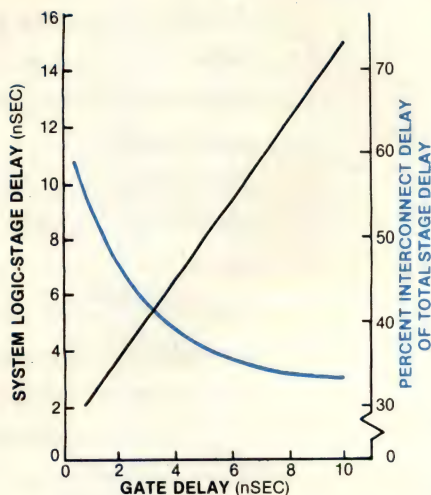

**Fig 1—Shorter gate delays** imply a need for fewer computer-system interconnects in order to achieve optimum performance. As *Electro/80 session 22* will show, gate arrays provide one way of achieving this goal. (Source: Fairchild Semiconductor Div)

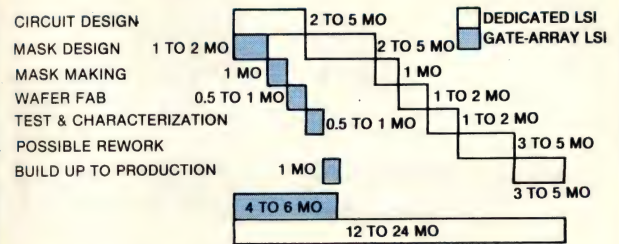

**Fig 2—Gate arrays** provide significant development-time advantages compared with conventional LSI. (Source: Fairchild Semiconductor Div)

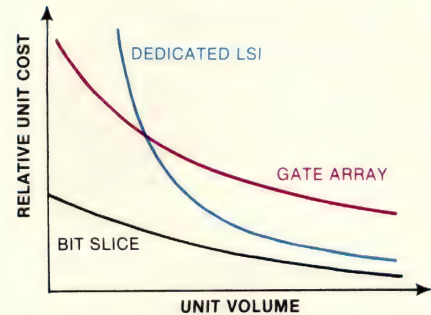


**Fig 3—The relative unit cost** of logic-design alternatives shows gate arrays with an advantage over dedicated LSI at lower volumes. (Source: Fairchild Semiconductor Div)

be prohibitive, especially when a system requires many types of LSI in small quantities.

The gate-array approach effectively deals with these difficulties (Fig 2). And while gate arrays might not be as efficient as custom parts in terms of chip size and power, they can prove more economical, considered in terms of overall IC cost over system life (Figs 3 and 4).

According to Goodman, future gate arrays will develop in two directions: Some will emphasize speed at the expense of greater complexity, while others will emphasize complexity over speed, in each instance exhibiting subsequent advances in the weaker area. But Fairchild's F300, he says, will address both high-

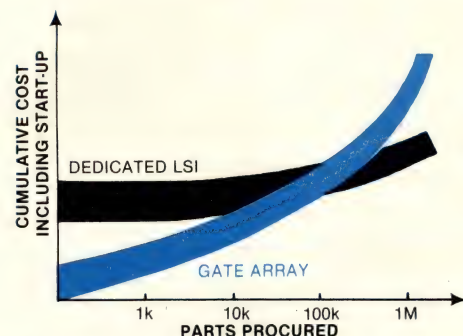

**Fig 4—The cost of LSI procurement** (including start-up) is lower for gate arrays than for dedicated LSI at lower volumes. (Source: Fairchild Semiconductor Div)





# "Want high performance in a field-proven RAM/ROM tester?"

## Then test drive the new 1980 Macrodata M-1!"

The big industry news in 1978 was the introduction of the Macrodata M-1 memory device tester. The big news in 1980 is that the 1980 version of the Macrodata M-1 is even better and easier than ever to use.

Look at these features:

- with operator prompting, it's easy for anyone to use — product engineers, production test engineers, maintenance engineers, technical operators.
- full ROM, PROM & EPROM test capability.
- two-years solid field experience with a broad customer base.
- fully automatic software calibration

(Auto-Cal) without the need for special jigs or fixtures.

- available with wafer probe or automatic handler test heads.
- system now available with interactive shmoo package, 20-MHz Raster Scan System, extensive applications software library.
- same powerful DEC LSI-11 computer as used in the Macrodata MD-207/11 memory board tester.

That's why we say, if you haven't seen the Macrodata M-1 lately, you haven't seen anything in state-of-the-art memory device testers. Send for the new M-1 brochure, or arrange to bring in your favorite ROMs, RAMs, (static or

dynamic) 4K, 16K, or 64K, and test drive the 1980 M-1 today.

Eaton Corporation, Semiconductor Test Systems Division, 21135 Erwin Street, Woodland Hills, CA 91365. Phone (213) 887-5550. Telex 69-8489.

Canada: (416) 678-1500

France: (01) 907 78 44

Germany: (089) 903 73 73

Italy: (02) 4154 141/2/3

Japan: (03) 499 0551

Scandinavia: (08) 87 94 90

UK & Benelux: (0628) 32 336

**EAT•N** Semiconductor Equipment





rompt Shipment Regardless of Quantity

## New! Laser-Sealed Precision Thermostat. Evaluate One FREE.

The new Series 5200 thermostat from AIRPAX has been developed to handle your exacting surface sensing requirements... and you don't have to wait 12 weeks to get it.

Laser technology is employed in the critical sealing process, allowing direct heat application to the area being sealed while protecting the sensitive bimetal disc from heat expansion.

The single pole, hermetically sealed AIRPAX Series 5200 thermostat is perfect for applications requiring isolated contacts. Over an operating temperature range of 15°F to 500°, it provides fast, positive response, excellent repeat reliability, and good shock and vibration resistance. The Series 5200's size and reliability make it highly suitable for use in business machines, copiers, and hot glue-melt machines. Its precise design and conformance to MIL standards make it ideal for industrial and military applications as well.

Sound too good to be true? Let us send you one FREE so you can see for yourself. Just write to the address below on your company's letterhead we'll provide you with a thermostat that closes on temperature rise at 135°F for your evaluation.

*For immediate need, Circle no 25  
For reference only, Circle no 26*



# AIRPAX

NORTH AMERICAN PHILIPS CONTROLS CORP.

Frederick Division  
P.O. Box 500  
Frederick, MD 21701  
Tel: (301) 691-5111




speed and high-density applications simultaneously.

The array incorporates 600 dual-level series-gated switching structures. Within limits, you will be able to select the power level of its internal switches, thereby trading off array propagation delay for dissipation. The initial three power options offered will be 8W (400 psec), 4W (800 psec) and 2W (1.2 nsec).

## High-level gate arrays improve design efficiency

Another **session 22** paper will be "Using the MECL 10K Macrocell Array as a Basic Building Block for Standard Product Development." According to author Randy King, systems engineer at Motorola's IC Div, Mesa, AZ, the firm's Macrocell Array (**Fig 5**) is an extension of the gate-array concept. However, rather than gates, each of its cells contains several unconnected transistors and resistors. Computer-stored specifications can create interconnection patterns for these components, transforming the cells into SSI/MSI logic functions termed macros. These macros take the form of standard logic elements such as dual D-type flip flops, dual full adders, quad latches and other predefined functions. Currently, the Macrocell Array library consists of 85 different logic functions.

King claims that using Macrocell Arrays as basic circuit building blocks is extremely easy and efficient because designers, when producing LSI configura-

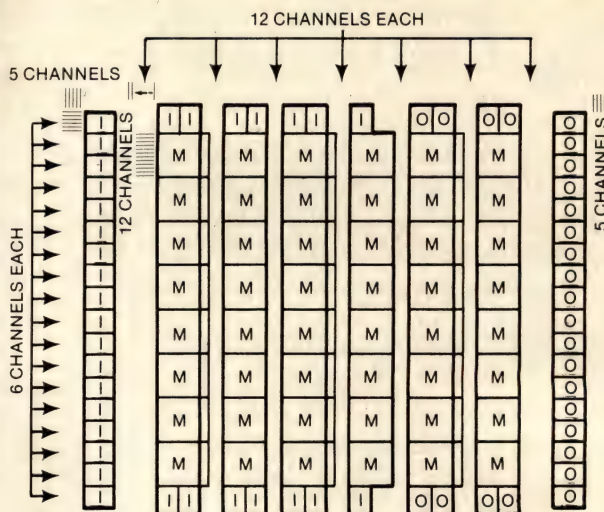

**Fig 5—A series of fixed arrays of unconnected transistors and resistors, Motorola's Macrocell Array consists of 48 major cells (M), 32 interface cells (I) and 26 output cells (O). Electro/80 session 22 will cover this alternative to custom-logic configurations.**

tions, need only be concerned with selecting the appropriate macros from the library, placing them in particular cell locations and creating the necessary cell-interconnection pattern. The computer generates the proper interconnection pattern within each cell.

Compared with the conventional approach to custom-LSI circuits, the Macrocell Array offers a tremendous reduction in delivery time, says King. With a stockpile of fully diffused wafers, turnaround time can

## A look at how to deal with job stress

Paper 2 of Electro **session 21** will deal with a timely topic: "Managing Personnel Under Stress." Author John Moody of Management Consultants, Hollis, NH, will present his ideas as part of **session 21's** theme, "New Ideas for Engineering Managers."

Moody will define stress and discuss its effects on managers in terms of current theories. He'll also discuss the various stages that an individual goes through in coping with a crisis; understanding these stages provides managers with information on their progress (and that of their subordinates) in dealing with problems.

Moody points out that approximately one-third of people's working lives are involved with job-related activities. And investigators are realizing that on-the-job and off-the-job stresses are ex-

tensively intertwined. While managers have little or no control over the problems they and their co-workers bring to the job, they can exert some control by learning to reduce anxiety in themselves and others. The result, says Moody, will be reflected in improved performance both at and away from work.

Moody will discuss some current stress-reducing techniques that seem effective both on and off the job:

- Anticipate stressful events and attempt to schedule them if they are unavoidable or avoid them if possible.
- Monitor the amount of stress you are under by periodic self-evaluation, using devices such as the Social Readjustment Rating Scale (to be discussed during the session).

- Undergo routine physical examinations to detect responses to stress, particularly the silent killers such as hypertension.

- Initiate stress-reducing activities (whether they be job oriented or not) in a positive direction rather than toward a specific goal. Goals tend to be distant and perhaps unrealistic and should at best be considered milestones.

- Be realistic—know what you can and can't do; what you will and won't do; what people will let you do and what they won't let you do.

- Self actualize; attempt to see yourself as others see you.

- Realize that life crises can leave physical and mental scars; learn to live with them rather than relive them.

- Be patient. The memory for pain is short.



be 12 wks. He also claims that the Macrocell Array will pave the way for future developments in high-speed digital arrays, including Macrocell units with several thousand gate equivalents and increased performance, plus smaller low-power-Schottky versions.

## Year of the floating-point processor

For many years, hardware floating-point processors have been an expensive option available only on high-performance computers. The presentations in **session 14** will indicate that such units are now becoming available outside their traditional realm.

Organized by Shlomo Waser, product planning manager at Monolithic Memories Inc, Sunnyvale, CA, the session will focus on semiconductor firms' development of single-chip floating-point processors. It will examine the major hardware alternatives for implementing floating-point processing—ranging from a single-chip approach to a fully parallel method requiring several hundred ICs—plus tradeoffs such as performance vs chip count and precision vs complexity.

According to session-paper coauthors Stephen Cheng and Krishna Rallapalli of Advanced Micro Devices Inc, Sunnyvale, CA, most 8-bit  $\mu$ Ps perform poorly in computation-intensive applications. Why? Because the  $\mu$ Ps' limited internal-data-path width makes for a slow computation-execution speed. And if the numbers in the computation are represented in floating-point notation, execution speed is slower still.

A typical 32-bit floating-point-arithmetic operation


requires approximately 2 to 5 nsec. But AMD's Am9512 floating-point processor, to be described by Cheng and Rallapalli, provides an order-of-magnitude performance improvement in floating-point computations. And by improving the throughput of 8-bit systems, such a 1-chip floating-point processor can often eliminate the need for costly upward redesigns to 16-bit systems.

The Am9512 (**Fig 6**) is fabricated with n-channel silicon-gate MOS technology and comes in an industry-standard 24-pin DIP. It provides single-precision (32-bit) and double-precision (64-bit) add, subtract, multiply and divide operations and interfaces with most of the popular 8-bit processors.

The bottom-line message of **session 14**? Devices like the Am9512 offer many significant advantages over software-based approaches to floating-point computations (see the article on pg 179 of this issue for a discussion of one such approach). For instance, single-chip floating-point processors can provide an approximately tenfold speed improvement over an 8080A software counterpart. And, because most of the devices contain the entire floating-point computation algorithm in microcode, external memory usage declines by as much as 2k bytes. By eliminating software, the floating-point chips save money. And they save hardware as well: A direct hardware floating-point implementation requires more than 10 times the board real estate of single-chip devices. Another advantage: lower power consumption.


## Memories stress nonvolatility

In the area of microcomputer memory devices, Electro/80 will continue the coverage initiated at February's ISSCC. **Session 11** ("Memories for Microprocessors"), chaired by Michael Bolan, senior applica-

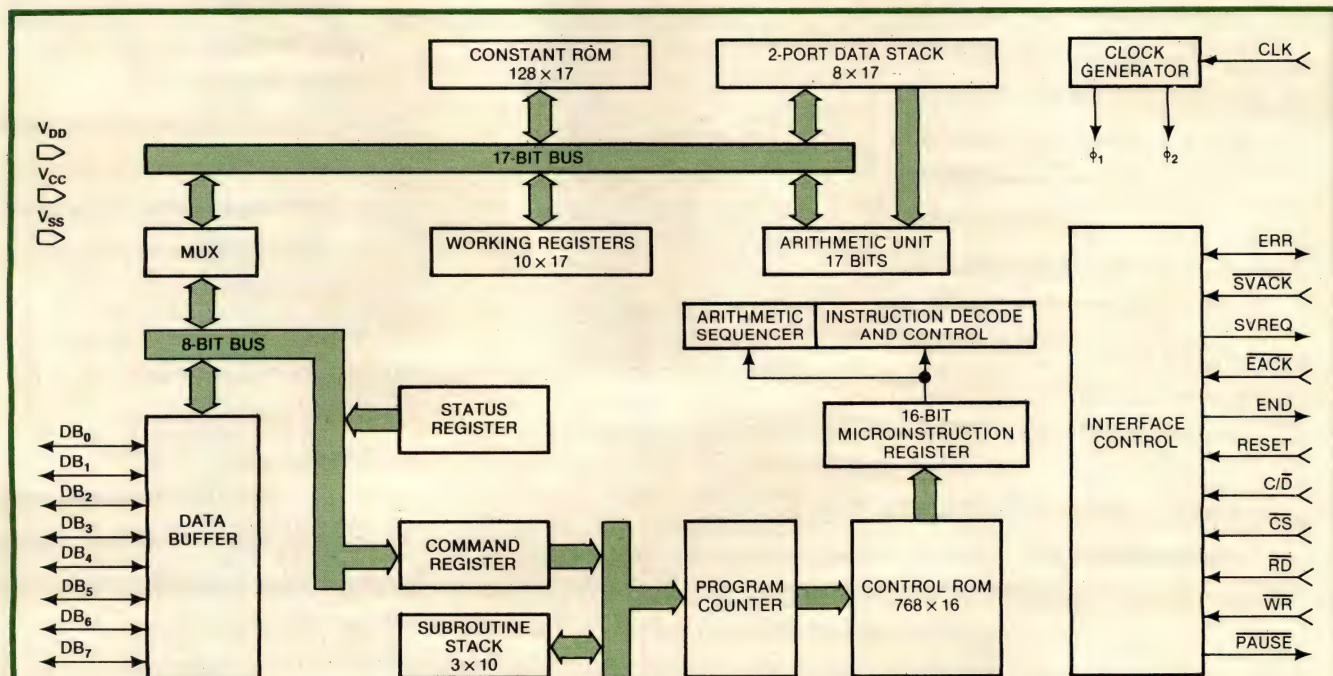

**Fig 6—A single-chip floating-point processor, Advanced Micro Devices' Am9512 can produce a tenfold speed improvement compared with its 8080A- $\mu$ P software counterpart. Electro/80 **session 14** will examine current developments in such devices.**







NATIONAL  
POWER PRODUCTS

## NOISE! TEMPERATURE! TRANSIENTS!

# "Who makes a reliable DC/DC Converter that stands up to all of it?"

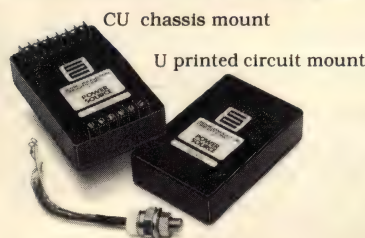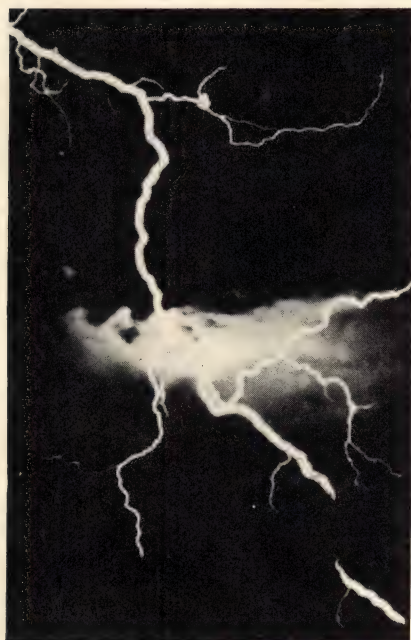

We do... because we know what you're up against!

We know your operational problems are complex. That's why we combined a host of innovations into our U and CU series of 25W dc/dc converters.

A 4:1 input range — unique in the industry — is standard in this line. So is the special filter that isolates the input source from reflected spikes. Input protective circuitry can sustain a minimum of 40% overvoltage, making transient suppression simple. Protective circuitry safeguards the input source and the output load. Remote shutdown conserves power and offers sequencing capability, and the self-resetting shutdown system ensures continuous operation. That's reliability!

Great innovations. Great choices. Both series are available with single, triple, or quadruple outputs. The shielded cases are designed for mounting convenience and noise-free operation. And like *all* the power supplies we make, our U and CU lines require *no derating from*

-25° to +71°C. Converters are 10-piece-priced at \$157 for single output (5V or 12V), \$228 for triple outputs ( $\pm 5V$ , +12V, or +5V,  $\pm 15V$ ), and \$228 for quadruple outputs ( $\pm 5V$ ,  $\pm 12V$ ).

For process control, telecommunications, any application where reliability and noise control are vital in a dc/dc converter, depend on us for the answer. We are a Semiconductor Circuits company. Call on us for problem solving. Look to us for innovation. See our product listings in EEM and Gold Book and ask for a free wall chart of our products.

### Problem Solving Through Innovation



**SEMICONDUCTOR  
CIRCUITS**

218 River Street  
Haverhill, MA 01830  
(617) 373-9104

© Semiconductor Circuits, Inc. 1979



tions engineer at Mostek Corp, Carrollton, TX, will focus on such memory issues as software, packaging, performance and nonvolatility.

One of the more vital of these issues is that of nonvolatility, which will form the subject of the paper "System Effective 5-Volt-Only Nonvolatile Static RAM." In it, coauthors Bud Koch and Wallace Tchon of Xicor, Sunnyvale, CA, will discuss the company's X2201.


Director of planning Tchon points out that traditionally, ROMs and EPROMs have provided nonvolatile storage. But ROMs must be factory mask programmed, and EPROMs require unsocketing, expensive quartz lids and high voltages for reprogramming. Tchon believes a better solution to microprocessor-system memory requirements is an electrically erasable device in which a user can change data without removing the device from the circuit.

The Xicor X2201 (Fig 7) eliminates the need for high voltages, quartz lids and unsocketing. The only power supply this 1k $\times$ 1 device requires is 5V; all control signals are simple TTL levels. The part contains two

independent bit-for-bit overlaid memories: one a standard static RAM, the other a nonvolatile EEPROM. While General Instrument has previously produced a similar device, it employs MNOS technology to achieve nonvolatility; the Xicor part utilizes a conventional n-channel silicon-gate process.

The heart of the X2201 is a floating-gate nonvolatile element, which according to Tchon is programmed and erased by enhanced tunnel current flow between multiple levels of polysilicon. Charging the floating gate with electrons turns on the element's transistor and accomplishes programming; removing the electrons turns the transistor off and erases the element. In operation, the system reads and writes all data into the device's standard static RAM; data then goes into the EEPROM by copying the entire RAM array in parallel in response to a TTL-level Store signal. Readout from the nonvolatile memory occurs by first transferring the data into the RAM by means of a TTL-level Array Recall signal; once the data is in RAM, it can be read or modified in the standard manner. Note that a copy of the original EEPROM data remains unaltered in the nonvolatile memory.

One aspect of a device like the X2201 is that it's an extremely versatile and simple-to-use nonvolatile memory component. And such nonvolatile RAMs can replace existing products because they are both static

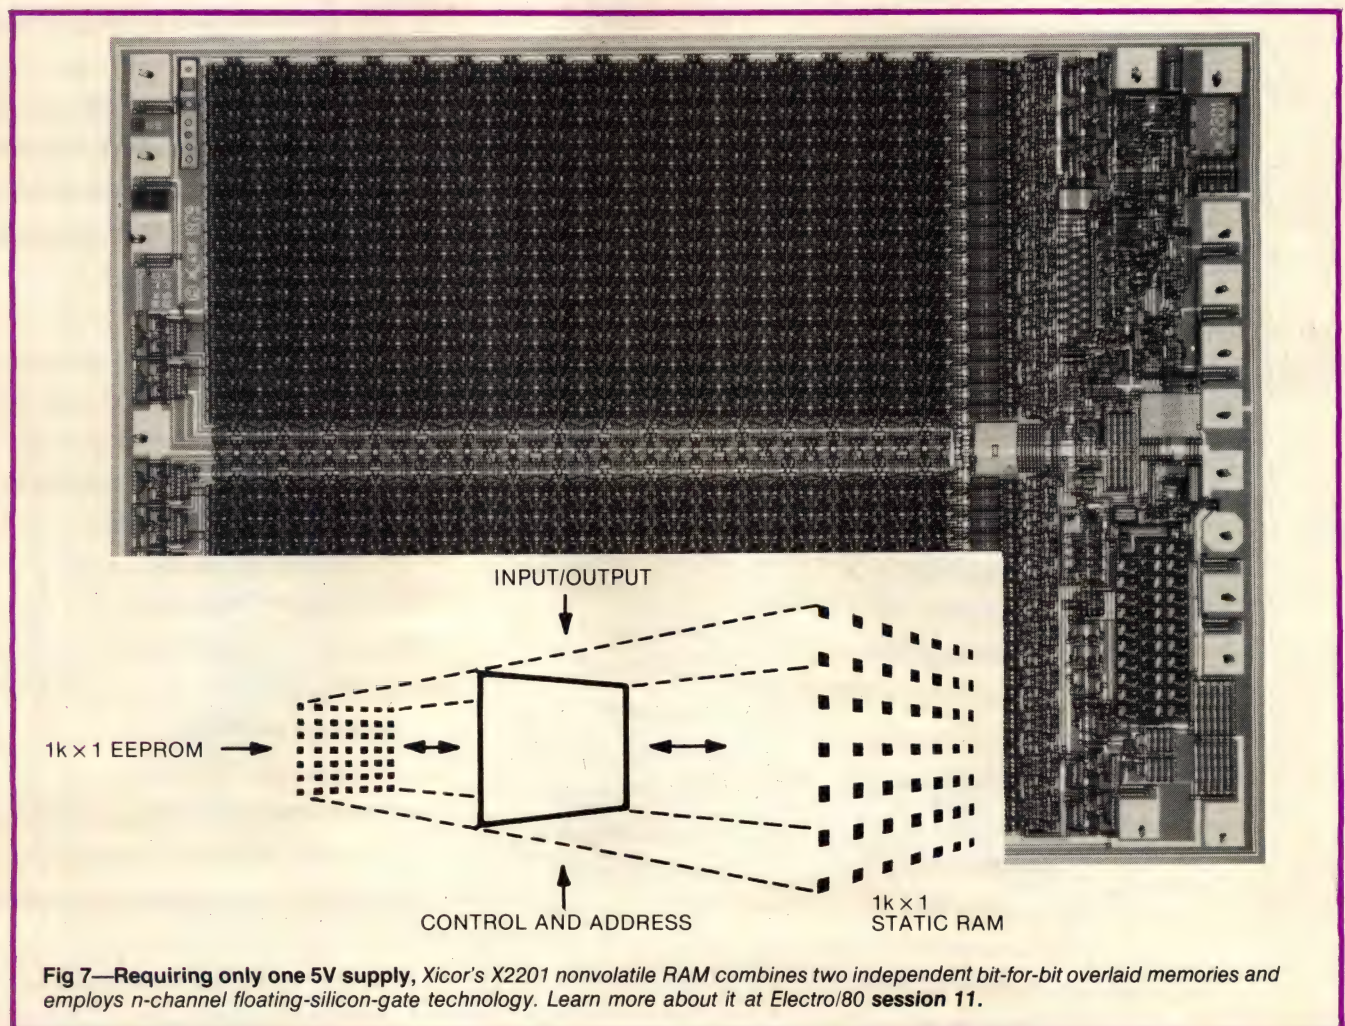





We can give you the power to solve a hot problem.

Heat is a rechargeable battery's biggest enemy. At about 45° C life starts to shorten dramatically. The new Polytemp™ is a NICAD® nickel-cadmium battery designed to take the heat and give long life. Satisfactory life to 70° C.

Polytemp's long life in high temperature applications makes it an ideal battery for backup power in memory circuits, emergency lighting and alarms, telephone and telegraph equipment, electronic instruments and process control equipment.

And Polytemp batteries have a unique negative electrode construction which means less voltage depression during overcharge than sintered nickel matrix types. A radial compression seal gives greater protection to surrounding circuits.

A battery that leads a hot life doesn't have to lead a short life. Now there's Polytemp from Gould. The company that makes more different types of batteries than anyone else in the world.

Available in sizes "1/2 AAA" to "F" (0.070 amp. hours to 7 amp. hours.) For complete design spec's write: Applications Engineering Mgr. Gould Inc. 931 Vandalia St. St. Paul, MN 55114



GOULD



RAMs and EEPROMs. Performance is up to snuff as well: The X2201 has an access time of less than 250 nsec.

## The future of $\mu$ P-based instruments

If you're concerned with "The Future of Intelligent Measurement Instruments and Systems," you'll find Electro's **session 9** of particular interest. This session will explore how designers are taking advantage of the  $\mu$ P in instrumentation systems by means of three approaches: systems based on the IEEE-488 interface bus,  $\mu$ P-based systems employing A/D modules that communicate with the system CPU over a microprocessor bus, and systems exemplifying a fully integrated approach.

The session will start with remarks by chairman Dr Henricus Koeman, engineering manager at John Fluke Mfg Co, Everett, WA. Initially, he says, the  $\mu$ P replaced complex LSI circuits; now, with the advent of sophisticated software for use in microprocessor circuits, considerable arithmetic capability and programmability result from the intelligence of a  $\mu$ P-controlled instrument.

What limits exist on this added power? They center on factors relating to ease of control and programmability.

ity. For example, Koeman says that the design or definition of a display and function keys can be complicated: The objective is to make totally obvious the operation of an intelligent instrument from its front panel, but a front panel with a large number of pushbuttons or an alphanumeric keyboard can have a negative impact on an instrument's "friendliness."

Other highlights of **session 9** include a paper by Tom Rousseau, project engineering manager at Tektronix Inc, Beaverton, OR, that will highlight the integration of an oscilloscope-type measurement function with digital-signal-processing capability. And Martin Larson, engineering section manager at Fluke, will discuss the integration of signal-processing power and measurement functions in digital voltmeters.

The session will also address the difficulty of cost-effectively solving some measurement problems with a single intelligent test instrument. This difficulty arises, for example, when you must measure several signals simultaneously and wish to adapt the system to your needs. Here, a  $\mu$ P-based system and analog signal-conditioning boards appear to be the best approach. Jawed Wahid of Data Translation Inc, Natick, MA, will examine the capabilities, advantages and flexibility of this kind of solution.

In the related **session 3**, "IEEE-488: User Fundamentals," Dave Ricci, interface engineer with Hewlett-Packard Co, Palo Alto, CA, will explore the use of this interface bus. **Session 9** chairman Koeman points out that both sessions cover related topics; attend both if you want a complete picture of future instrumentation.

## The single-chip solution

**Session 29** should prove useful in providing an overview on another key electronics area. Entitled "Total Solution on a Single Chip" and chaired by K S Padda, systems engineer with Texas Instruments Inc, Houston, it will focus on single-chip microcomputers.

Only recently, single-chip CPUs were considered a triumph in the electronics industry, yet they were rapidly followed by single-chip  $\mu$ Cs. Consequently, 1-chip devices can now implement a large number of controller applications—a possibility that has changed traditional design economies. Now, the cost of peripheral interface circuitry exceeds that of the controller. **Session 29** will examine the trend toward also placing interfacing circuits on-chip, thus resulting in a true single-chip total solution.

**EDN**




## Everything But...

Acme Electric's AMS Series AC to DC modular switching power supplies have everything but the kitchen sink. 39 models to meet all your power needs from 100 watts to 625 watts, output voltages from 2 VDC to 28 VDC, UL recognition, super 0.05% regulation and built-in overvoltage protection.

And... they are quiet. Internal filtering keeps conducted EMI within the spec limits of MIL-STD 461A. Keep your logic or memory chips happy with noise-free AMS power. No flips instead of flops. No lost bits.

Try an AMS model on your next job. They are all on the shelf for immediate delivery, and let your logic or memory circuits tell you how quiet they are.

Circle the reader number or write to receive the AMS Data Sheet featuring detailed electrical and mechanical specifications.



**Acme Electric Corporation**

Cuba, N.Y. 14727 Phone (716) 968-2400

For more information, Circle No 97

## Article Interest Quotient (Circle One)

High 470 Medium 471 Low 472

## JOB SHOPPING?

Check EDN's Career Opportunities


**EDN: Everything Designers Need**



# Ask yourself some fitting questions about test fixturing.

## 1.

ATEC Series 55-150



**Is there a fixturing system that fits perfectly with my present test set?**

Yes. The ATEC Series 33. No matter what test set you presently use, ATEC Series 33 has test fixturing that fits. That means it mates with the GenRad 2270, the Teradyne L527, the Hewlett-Packard 3060A and, of course, the ATEC Series 55 test sets. The ATEC Series 33 fits perfectly with these and many more.

## 2.

**But will it fit different product sizes?**


Yes! The Series 33 Interface Adaptor accepts a variety of product sizes by simply changing the test head. There's no need to purchase a different adaptor for different product sizes. The Series 33 Interchangeable Test Heads are configured to the specific test point pattern of your product. They can accommodate products up to 20 x 24 inches with up to 2048 test points.

## 3.

**What if my product doesn't fit the standard fixturing?**


Give us a sample product or suitable artwork, and we'll build fixturing to fit it. No problem, no trouble, no big expense. We've been making custom test fixturing a long time, and we're good at it.

GenRad 2270 In-Circuit Functional Test System



## 4.

Teradyne L527 Assembly Inspector



**Will ATEC test fixturing really fit into my production scheme and solve my in-circuit and functional test problems?**

You bet it will. We've fixtured hundreds of test sets for a variety of products. The system works, and it works well.

## 5.


**Will the ATEC Series 33 fit my budget?**

Yes! It's cost efficient for both in-circuit and functional test systems. Besides, every moment you don't have reliable test fixturing costs you money. It also costs you time and frustration, something nobody can afford.



HAROLD REDSHAW  
Sales Coordinator  
ATEC, Pomona

## 6.

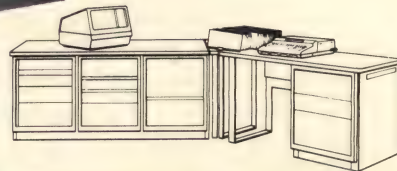

Hewlett-Packard  
HP3060A Board Test System

**Does the ATEC Series 33 fit all my fixturing needs?**

Definitely. The Series 33 has been expertly engineered for reliability, skillfully assembled for durability, economically priced for affordability. For test fixturing that fits any test system you're thinking about, there's no question about it. ATEC Series 33.

## ATEC™

ASSEMBLY AND TEST  
EQUIPMENT CORPORATION

2887 NORTH TOWNE AVENUE  
POMONA, CALIFORNIA 91767  
714 621-9511  
TWX 910-581-3838

AN EVERETT/CHARLES COMPANY

**EC™ EVERETT/CHARLES, INC.**

For more information, Circle No 98



# Electro/80 Products


## Fiber-optics kit speeds data at 20M baud

Many currently available fiber-optics kits and data-link modules might get your systems up and running in short order, but without your learning anything in the process. This kit, however (the result of a collaboration between AMP and Motorola), brings theory and practice together.

The package includes the optical emitters, detectors and connectors, drilled pc boards, ancillary semiconductors and other parts required to build a pair of transceiver modules. A 1m-long preterminated fiber is provided, in addition to the connectors, tools and materials required for terminating other fibers. A complete set of device data sheets and Motorola's Application Note AN-794 documents the project.

The note includes the transceiver schematic, parts list and full-size, reproducible pc-board artwork. Transmitter/receiver performance and testing are completely characterized with waveform photographs and dc measurements.

The data link's only interface requirements are TTL-compatible rise times and levels. Any data-encoding scheme, combination of ONEs and ZEROs and idle-channel condition can be employed, and either simplex or half- or full-duplex operation is possible, provided the data rate doesn't exceed 20M

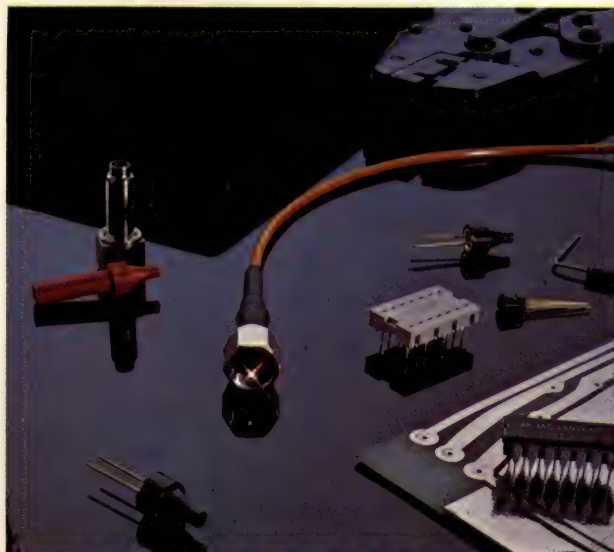

baud. A module can operate over a 100m range (depending on fiber type) and be configured as an optical repeater by looping back the receiver data output to the transmitter data input. \$495. Delivery, 8 wks ARO.

**AMP Inc, 449 Eisenhower Blvd, Harrisburg, PA 17105. Phone (717) 564-0100. Booth No 2416.**  
Circle No 423

## Remote terminal offers flexible operation

If your data-entry and display application doesn't require the high performance (and can't justify the high cost) of a full-featured keyboard/CRT terminal, you'll be interested in Model TM25.

Measuring just 8.5×4.5×0.6 in., the unit sports a waterproof front panel, which protects the 8-digit, 7-segment LED alphanumeric display, the seven special-function keys and indicators and the hexadecimal or numeric keyboard. Through software interfacing with the host computer, the function keys can start or otherwise control machine tools, ATE units and similar processes. In addition to indicating CPU acceptance of keyboard entries, the keys' individual LEDs can be CPU programmed to initiate operator actions.

By employing a standard serial-ASCII 20-mA RS-232C current loop, the TM25 can operate at distances of up to 1 mi from a CPU. Its locally




buffered input permits data or message verification before transmission to the processor at 110 or 300 baud. One DB-25 connector handles the power and I/O lines. \$249 for hexadecimal- or numeric-keyboard version.

**Burr-Brown, Box 11400, Tucson, AZ 85734. Phone (602) 747-0711. Booth Nos 2255, 57.**

Circle No 426




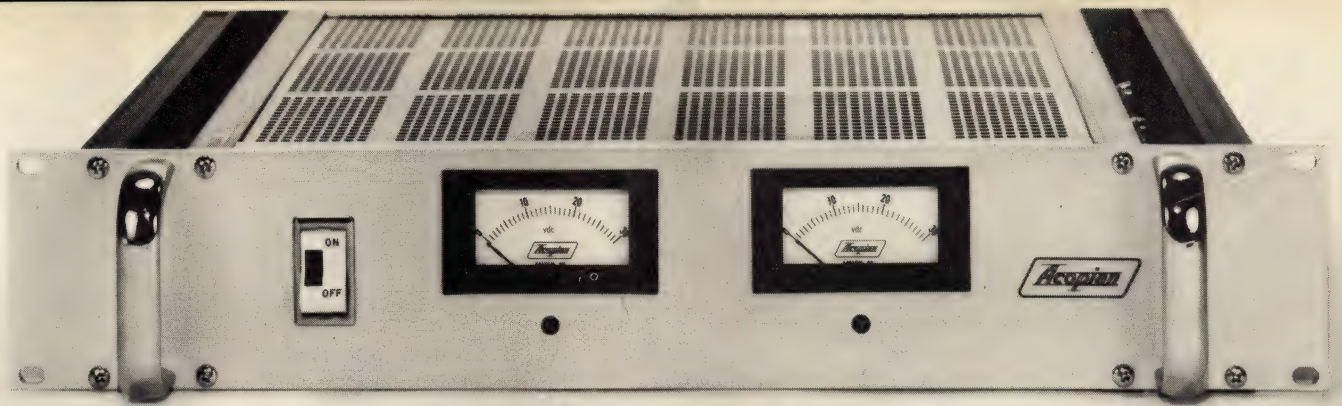

### Rack mounting

Available with outputs of  $\pm 12$  or  $\pm 15$  volts, to 9 amps. Designed for mounting in 19" RETMA cabinet racks. Shipped in nine days.

# Multiple output DC POWER

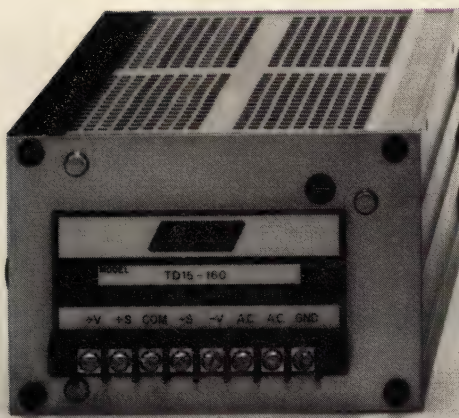

### General purpose

Thousands of dual output voltage/current combinations. Balanced output duals for op amps. Triples for microprocessors. Shipped in three days.




### Plug-in

Widely used in process control instrumentation and test equipment, these modules can be changed in seconds. Dual and triple outputs, matched or dissimilar, are available to 150 volts, to 2 amps. Shipped in three days.



### Narrow profile

Only 1.68" thick — fit where others can't. Choice of  $\pm 12$  or  $\pm 15$  volt tracking outputs, 500 ma or 1 amp. Single output models also available. Shipped in three days.

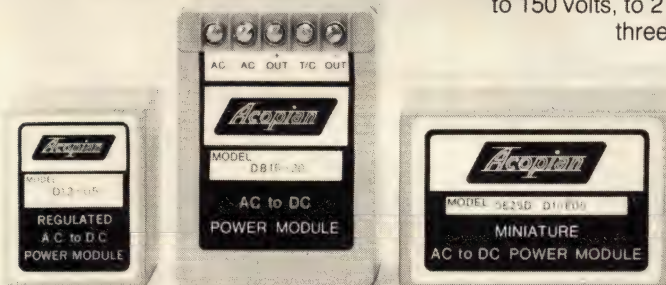

### Miniaturized

Select matched or dissimilar outputs to 28 volts, to 500 ma. For PC-board or chassis mounting. Single output models are also available to 75 volts, to 2.5 amps. Shipped in three days.

Write or call for a copy of the new 52-page Acopian Catalog. It contains complete specifications and prices on these and a wide variety of single output power supplies.

**Acopian** Corp.

P.O. Box 638, Easton, PA 18042  
Toll free number: (800) 523-9478



Choosing a 16-bit MPU is no easy job. We know. We went through it ourselves back in '78.



We chose the Z8000 because we believed you'd choose the Z8000. Because it's better. Here's why:

## **"The AmZ8000 has a better architecture."**

It has 16 registers. All general. All for you. Use them for data or addresses. Use them to write more efficient software with less code and faster execution.

The AmZ8000 has gobs of address space: 8M bytes of direct addressing in each of four possible address spaces. It has memory management with sophisticated relocation and protection features. It has a rich instruction set that operates on data types from quad length words right down to single bits. You can even map the I/O into memory or keep it separate.

Sven Simonsen, Vice President  
and Technical Director,  
Advanced Micro Devices

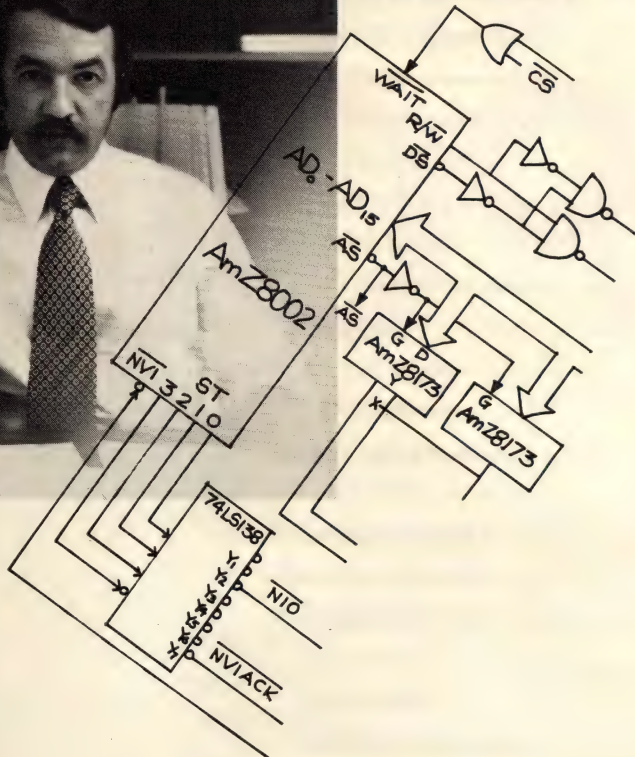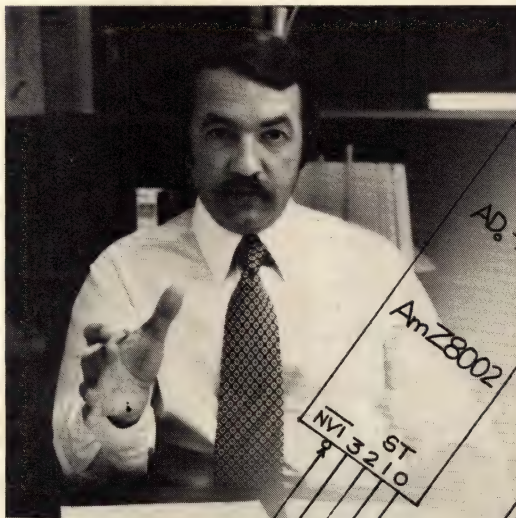

As if all that weren't enough, the AmZ8000 has a whole series of string-oriented instructions to move, translate or compare up to 64K bytes of data in a single instruction.

## **"The AmZ8000 has a better future."**

The AmZ8000's architecture and instructions fit perfectly with today's computation, communications and instrumentation markets. So do the peripherals. And all the popular existing parts for the 8080A/8085A, including the Am9511A and Am9512 floating-point processors and the Am9517A

# **"The AmZ8000 is better for your application."**



DMA circuit, work great with the AmZ8000.

There's a CPU that's just right for you. For imbedded controllers, where 64K of memory is enough, there's a compact 40-pin CPU that uses less memory for programs. For addressing large memory spaces, there's a 48-pin CPU that's software compatible.

But best of all, we're getting ready to introduce a bunch of new bipolar and MOS peripherals. There's an I/O device with a built-in FIFO, a chained DMA controller, error correction circuits and an editing CRT controller, just to name a few.

As technology develops, newer and better software-compatible CPUs with higher throughput will be coming your way.

## **"The AmZ8000 has better support."**

We know you need supporting documentation. And we've got it. Ask us for our Data Book, our Processor Interface Manual and our Processor Instruction Manual.

We know you need software development tools. And we've got them, too. There's our macro assembler with powerful high-level constructs and a relocatable linking loader,

and a PASCAL compiler. Cross-software is available, too.

If you need a hardware development system, our AmSYS8/8 with in-circuit emulator was designed just for the AmZ8000. So was our Am96/4016 Evaluation Board. (To learn all about them, come to one of our field seminars or take one of the courses offered by our Education Department.)

And soon, you'll need parts. With the AmZ8000 you've got two major U.S. manufacturers with a mask-exchange agreement. We have international partners, also. When you need parts, we'll be there.

## **"The AmZ8000 is better because we're better."**

Advanced Micro Devices didn't become the nation's fastest growing IC company by accident. We did it by design. We only manufacture high-quality, high-volume parts. And from the day we opened for business, we've thrown in a freebie with every order: MIL-STD-883.

If you want your application to be better, get the MPU that's better. Get the AmZ8000. It's the best 16-bit family for you.

# **Advanced Micro Devices**

901 Thompson Place • Sunnyvale, CA 94086 • Telephone (408) 732-2400

Visit AMD at the Paris Salon International des Composants Electroniques,  
March 27 thru April 2, Hall 1, Aisle 8, Stand 41.



# Electro/80 Products

## Thermometer sports tight specs, low cost

Although small enough to fit in your shirt pocket, the Series 1001 digital thermometer claims big-instrument performance. Employing NiCr/NiAl thermocouples, the 2.75×5×1-in. unit spans a -30 to +450°C range without the need for range switching or reference-junction calibration—cold-junction compensation is automatically held to 0.075°C/°C.

Five standard probes are available. The X10, a general-purpose flexible-lead unit, has an exposed thermocouple bead, especially suiting it for rapid liquid or air-temperature measurements up to 350°C. The X11 through X14 versions (operable to 500°C) provide various rigid-probe configurations and come with handles.

Requiring a single AA battery, Model 1001 draws just 800  $\mu$ A—permitting up to 500 hrs operation with an MN1500 alkaline cell—and sports resolution of 1°C and accuracy of 0.3%±1 digit. An LCD automatically indicates battery end of life. \$189, including an X10 probe and zinc-carbon battery.

**Jenway Instruments Inc, 10080 N Wolfe Rd, Cupertino, CA 95014. Phone (408) 996-1116. Booth No 1025.**

Circle No 424




## Bubble cassette subs for mag tape

Storing 64k bits in a 0.78×1.77×2.36-in. package (equivalent to the storage capacity of 65 ft of paper tape), the FBM31CA can replace paper tape, punch cards or magnetic tape in many portable-memory applications. Utilizing serial-loop data organization and a 100-kHz drive frequency, the cassette features a transfer rate of 100k bps and 740-msec max access.

The FBMU001 holder panel mounts in the host terminal and provides the mechanical and electrical interface between the cassette and the control-electronics board. Containing the required coil and function drivers, sense circuits and LED status indicators, the holder measures 2×2×4.5 in.

All of the cassette's TTL-compatible interface logic, timing circuits and power-supply regulators mount on the FBC308C1A control card. Data is normally 8-bit parallel processed, but a DMA mode is also possible. Measuring 9×6.3 in., the control card requires +5V (1.5A max), +12V (0.25A max) and -12V (0.1A max).

FBM31CA, \$117.50; FBMU001, \$212.50;

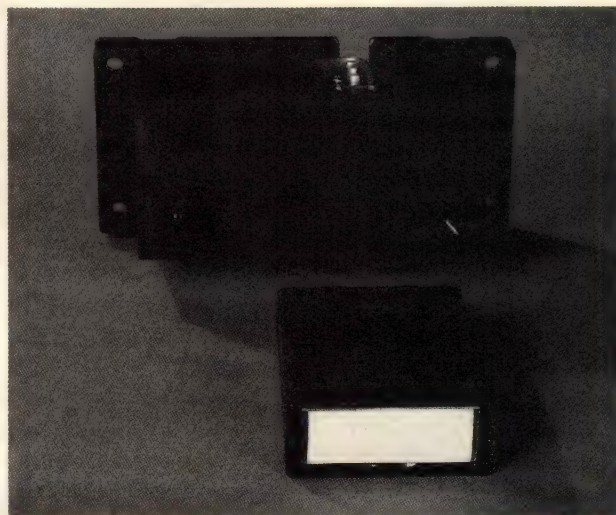

FBC308C1A, \$331.25. Delivery, 8 wks ARO.

**Fujitsu America Inc, 910 Sherwood Dr, Lake Bluff, IL 60044. Phone (312) 295-2610. Booth Nos 3107, 09.**

Circle No 427





**Model  
3010  
\$200**

**Model  
3020  
\$350**

# Generate virtually any wave shape with famous B&K-PRECISION cost-effectiveness!

The new B&K-PRECISION Model 3020 sweep/function generator is the most versatile signal source ever offered by B&K-PRECISION. This one instrument can actually replace a function generator, sweep generator, pulse generator and tone-burst generator. Frequency coverage spans 0.02Hz to 2MHz in seven ranges, with each range providing linear 1000:1 frequency control.

A low-distortion, high-accuracy signal source, the 3020 has the versatility to generate almost any waveform. Examples include sine waves, square waves, TTL square waves, tone-burst, pulses and ramps. All waveform types can be inverted. Internal linear and log sweep capability is also featured. Both modulation and carrier levels can be varied so even a double sideband suppressed carrier test signal can be generated.

For those applications requiring standard function generator signals only, B&K-PRECISION also offers the Model

3010 low distortion function generator. The 3010 generates sine, square, TTL square and triangle waveforms from 0.1Hz to 1MHz in six ranges. An external VCO input is provided for sweep frequency tests. Variable DC offset is also featured for engineering applications. Modestly priced, the 3010 is a stand-out value.

Like other B&K-PRECISION products, the 3020 and 3010 are available for immediate delivery at your local distributor. A ten day free trial is available at many locations.

For additional information and complete specifications, write:

**B&K PRECISION** **DYNASCAN CORPORATION**  
6460 W. Cortland Street • Chicago, IL 60635 • 312/889-9087

In Canada: Atlas Electronics Ontario International Sales: Empire Exporters, Inc. 270 Newtown Road, Plainview, L.I., N.Y. 11803

**For free demonstration circle no 102  
For additional information circle no 103**



# Electro/80 Products

## Logic analyzer catches 3-nsec glitches

Logic analyzers don't analyze: Only you can do that, and then only if your test equipment is versatile and fast enough to capture the data stream accurately—as Model PM3500 is. Clocked at 100 MHz, the unit can capture 3-nsec, 400-mV hardware-generated glitches.

Memory capacity equals 16 bits wide×505 words deep, and you can display this entire data block. Alternatively, you can expand the display to show 50- or 20-bit segments for a closer look at the timing.

The instrument can display the state of stored data in binary, octal or hexadecimal notation; you can locate (via cursor) and show any 16-bit-wide 16-word segment of the memory.

Internal triggering occurs upon recognition of a 16-bit word denoted by means of front-panel switches (an X “don't care” state is also permitted). Threshold sensitivity for channels 0 to 7 and 8 to 15 can be independently set to TTL, ECL or a variable level; 100-MHz recording requires 500 mV p-p.



Measuring 7.9 in. high, 15.2 in. wide and 18.5 in. deep, the PM3500 weighs 30 lbs and costs \$8995, including its standard probe set.

**Philips Test & Measuring Instruments Inc, 85 McKee Dr, Mahwah, NJ 07430. Phone (201) 529-3800. Booth Nos 1010-14, 1109-13.**


Circle No 428

## Versatile DMM employs $\mu$ C control

With a single-chip,  $3\frac{1}{2}$ -digit ADC handling measurement and display-driver operations and a 4-bit  $\mu$ C performing decision-making and housekeeping chores, there isn't much left for you to do when using Model 2845 except select the desired function and measure. You can measure ac or dc voltage and current, resistance and continuity; the continuity buzzer (when enabled) sounds for a measured resistance value of less than 180 $\Omega$ .

Offering features not usually found in its price/performance/size range, the digital unit furnishes an Autoranging mode, which operates for any parameter measurement unless range locked by the user. This capability reduces measurement time because the instrument doesn't have to determine the optimum range setting step by step.

Voltage measurement (ac and dc) spans 1 to 1000V FS with a minus sign displayed when appropriate. Input impedance equals 10 M $\Omega$ , and the input is protected by a fuse/diode network. DC accuracy equals  $\pm 0.1\% \pm 1$  LSD for all ranges; ac accuracy is determined by both range and frequency, with the 50- to 500-Hz, 1 to 100V value being  $\pm 0.5\% \pm 3$  LSD. AC/DC current ranges cover 1 to 1000 mA and have

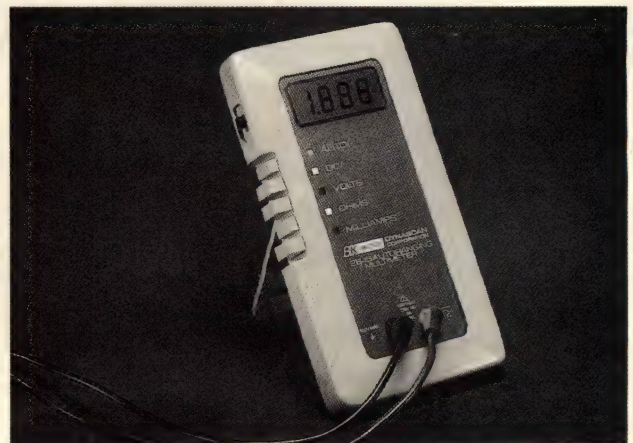

similar accuracy limits and tolerances.

Measuring less than 7×4×1.5 in. and weighing 1 lb, the 2845 has an operating range that spans 0 to 55°C and 0 to 80% relative humidity.

With test leads and spare fuses, Model 2845 costs \$170. Delivery, 6 to 8 wks ARO.

**B&K-Precision, 6460 W Cortland St, Chicago, IL 60635. Phone (312) 889-9087. Booth Nos 1207, 09.**

Circle No 425



# WHEN YOU'RE HERMETICALLY SEALED, YOU CAN COUNT ON LONG LIFE.

## LIKE OUR MINIATURE METAL-CASE RELAYS. MILITARY QUALITY AT PLASTIC PRICES.


### PLASTIC? OR HERMETIC METAL CASE. WHICH RELAY IS THE REAL SURVIVOR?

Sure, some plastic relay manufacturers claim their non-hermetic sealed products will survive flow-solder and solvent baths. We say *maybe*. And even if they do, will they really survive in the field?

For our hermetically-sealed all-metal relays, there's *no question* about long life. Our MM-5 microminiature (TO-5 type relays) are going strong after 10 million operations. Our Flagship® family of half-size crystal cans, 50 million or more. That's why we call them the "Survivors" — they keep performing in applications where plastic won't last.

### MILITARY QUALITY AT PLASTIC RELAY PRICES.

Like our military relays, both Flagship and MM-5 relays are made to last — not just strong, but truly leak-free as only hermetic devices can be. They reliably withstand punishing atmospheres, demanding electrical performance requirements, and as much as 30g shocks

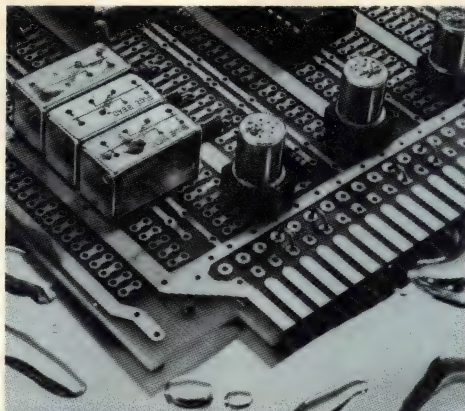

Electrical Characteristics/Selector Chart  
Write on company letterhead for evaluation sample.

	Nominal Voltage Vdc	Pick-up Voltage (Max.)			Coil Resistance (Ohms) ± 10%		
		FS2	FS3	FS5	FS2	FS3	FS5
Flagship	6	4.4	4.4	4.4	55	130	25
DPDT	12	8.7	8.7	8.5	220	520	100
Contact Ratings:	24	17.5	17.5	17.0	870	2070	400
up to 5 Amps	36	26.0	26.0	26.0	1960	4550	900
	48	35.0	35.0	34.0	3480	8300	1600
MM-5	5.0	3.6			50		
DPDT	6.0	4.2			100		
Contact Ratings:	12.0	8.4			390		
10 mA to 1 Amps	18.0	13.0			880		
	26.5	17.0			1560		

(Other tolerances and specifications upon request.)

and vibration of 10g's to 500 Hz. You can operate them over a -55 to +85°C temperature range without derating or heat sinking. Even immerse them again and again in strong industrial solvents and flow-solder baths. With leak rates of less than 10<sup>-6</sup>cc/s, they can take it. Millions of cycles later, there's still no corrosion, no perceptible wear, no contact degradation. And, unlike solid state devices, no risk of false operation.

### PRODUCTION SAVINGS, RIGHT DOWN THE LINE.

Use Flagship and MM-5 relays with automated component insertion equipment to keep high volume assembly costs down. Save on PC-board space, too, with TTL-compatible MM-5 relays that fit on 1/2" centers, and Flagship relays that are just 1/3 the size of competitively-priced "equivalent" plastics. Write or call for latest catalog and pricing and/or request sample on letterhead. Relay Division, Hi-G Incorporated, 580 Spring St., Windsor Locks, CT 06096; (203) 623-2481.

For more information, Circle No 104



DESIGNED TO SURVIVE.




# Electro/80 Products

## 4-channel DAC settles to 12 bits in 4 $\mu$ sec

The ST-724 analog-output board provides four D/A channels with 12-bit resolution and an accuracy to within 0.05% FSR. Hardware, software and pin compatible with SBC-80 and Multibus-based  $\mu$ Cs, it's a direct replacement for the SBC-724. Supplied with a systems manual and paper-tape-based diagnostics, the unit is controlled by Intel's RMX-80 software—facilitating installation and calibration.

A wide range of user-selectable parameters adds to the unit's versatility, and a variety of input formats (0 to 5 and 0 to 10V) and output ranges ( $\pm 5$  and  $\pm 10$  V dc), including a 4- to 20-mA current output, is available. Current outputs require a user-provided external excitation source of 18 to 30V dc.

The digital inputs from the host-computer bus are converted by four 12-bit hybrid DACs, each having an input storage register. D/A linearity lies within  $\pm \frac{1}{2}$  LSB, and differential nonlinearity equals  $\pm \frac{1}{2}$  LSB max. Zero TC (unipolar ranges) is less than  $\pm 5$  ppm/ $^{\circ}$ C (FSR), and bipolar offset TC is within  $\pm 10$

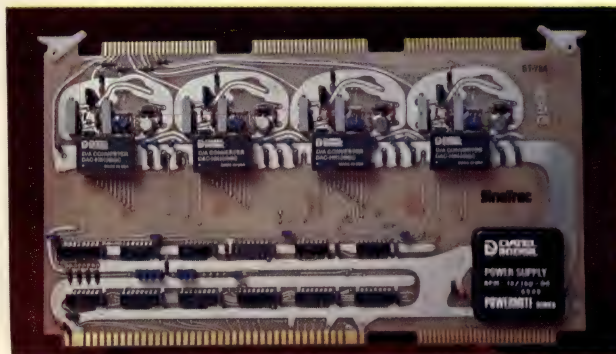

ppm/ $^{\circ}$ C of FSR. DAC settling time to  $\frac{1}{2}$  LSB specs at 4  $\mu$ sec max, and slew rate is 20V/ $\mu$ sec; FSR gain TC is less than  $\pm 20$  ppm/ $^{\circ}$ C.

Board size stands at 12 in. wide, 6.75 in. deep and 0.5 in. thick—permitting adjacent-board slot installations. \$595. Delivery, 8 wks ARO.

**Datel-Intersil Inc, 11 Cabot Blvd, Mansfield, MA 02048. Phone (617) 339-9341. Booth Nos 1723, 25, 27.**

Circle No 429

## Phase-locked loop stabilizes RF sweeper

Spanning a 10½-octave range, Model XR-1500 RF sweep generator covers 1 to 1500 MHz without band breaks. An exception to the old rule of thumb that wide-band sweepers can't also exhibit high narrow-band stability, it employs phase-lock techniques to achieve its performance: With a sweep width of 2 MHz or less, residual FM equals 1 kHz p-p and drift is 50 kHz, permitting accurate alignment of narrow filters and networks.

The XR-1500 incorporates a digitally generated marker system that alleviates the usual problems associated with harmonic (birdy) markers: non-constant amplitude over the complete sweep range and interbeating between different market oscillators. Marker amplitude, width and tilt are individually controllable.

Leveled to within  $\pm 0.25$  dB of the desired value, RF output is controlled by two step attenuators (10 and 1 dB/step) in conjunction with a high-resolution vernier. An LED display shows center frequency; active functions are identified by color bars and enunciators. You can switch select sweep width over 0.2 to 1500 MHz; continuous fine adjustment is



provided by a vernier. Sweep rate is controllable from 0.01 to 100 Hz, and you can also synchronize it to the line or vary it manually.

Measuring 4 in. high, 12 in. wide and 15 in. deep, the XR-1500 weighs 18.5 lbs and requires only 50W from a 120/240V, 50- or 60-Hz source. Priced at \$2850, it comes with the marker package, a 1-kHz modulator and RF/video-blanking capability. Delivery, 12 wks ARO.

**Texscan Corp, 2446 N Shadeland Ave, Indianapolis, IN 46219. Phone (317) 357-8781. Booth No 1825.**

Circle No 431



**On a single new Burroughs  
SELF-SCAN<sup>®</sup> panel  
you can vividly display  
graphics  
foreign languages  
large and small characters  
upper and lower case letters  
single or multiple lines  
blinking lines and characters  
or anything else you want.**



A plasma display panel showing a graphic of a car on the left, the word "LINK" in large letters in the center, and some numbers and symbols on the right.

## **That's versatility.**

The SELF-SCAN "One-for-All" gas plasma display offers maximum display capability on a *single* panel. This includes alphanumerics, symbols, charts, etc., for word processing, typesetting systems, signature verification, plotting trends, and many other applications.

With 17 horizontal rows and 192 vertical columns of addressable dots (3294 programmable dots in all), you can display single or multiple character lines on 5x5, 5x7, 6x12, 7x12, 8x12, etc. dot matrices (max. 17 vertical dots).

You've never seen a display this bright, crisp, or easy to read. It's rugged and reliable. Get all this, including drive electronics, for only \$262 per display in lots of 100. And, you get 90-day delivery.

Nothing . . . but nothing beats this Burroughs SELF-SCAN panel display. We'll prove it! Write **Burroughs OEM Marketing Corporation**, Burroughs Place, Detroit, MI 48232, (313) 972-8031. In Europe, High Street, Rickmansworth Hertfordshire, England. Telephone 09237-70545.

**For general information, Circle no 33  
For detailed specifications, Circle no 34**

# **Burroughs**




# Electro/80 Products

## Recorder achieves 100-dots/in. resolution

By employing a 1-piece solid-state thermal print-head, the Tigraph 100 graphic display achieves 100-dot/in. resolution across its full 4.2-in. recording width. Case size (5.75 in. wide×6.25 in. high) permits side-by-side mounting of three units in a 19-in. rack panel—providing up to 18 data-recording channels in a height of only 7 in.

The recorder's only moving parts are contained in its chart drive, powered by a print-rate-synchronized stepping motor. And because the unit prints all pertinent data, including timing marks and grids, you needn't use preprinted sprocketed chart paper. A print rate of 5 lps max combines with 282 chart speeds (0.3 in./hr to 3 in./min) to provide 164 days of recording on a single chart 94 ft long.

Sporting a 10-M $\Omega$  impedance, the recorder provides a standard input range that spans 0.5 to 2V (1 mV to 100V optional). Full-scale specs include resolution of 0.25% and accuracy of  $\pm 0.5\%$ . Zero-offset adjustment can occur over  $\pm 100\%$  of input span, and zero drift equals 0.6  $\mu\text{V}/^\circ\text{C}$  max. Common-mode rejection stands at 120 dB at 60 Hz to 100V dc or ac pk.

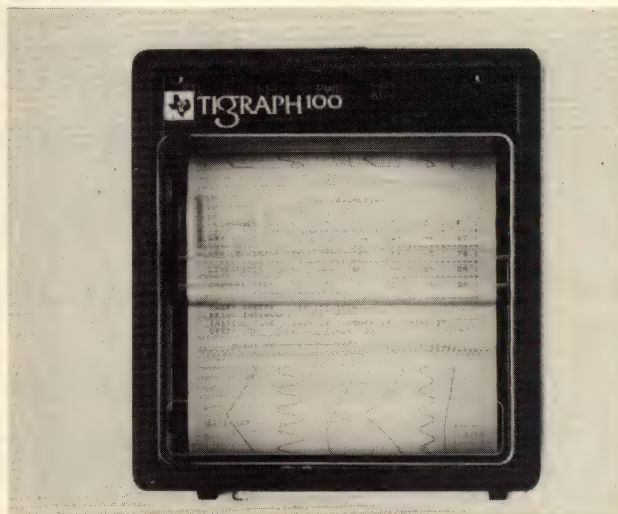

Operating from 117/230V, 50 or 60 Hz, the unit typically requires 65W. \$1995 for the basic 6-channel model. Delivery, 6 wks ARO.

**Texas Instruments Inc, Box 1443, M/S 663, Houston, TX 77001. Phone (713) 490-2888. Booth Nos 596, 97. Circle No 430**

## Couplers ease IEEE-488 interfacing

Interfacing instruments to the industry-standard IEEE-488 bus is now easier and less expensive: A Series 2488A coupler allows you to buy and use an instrument without a built-in interface and later add the bus capability when you need it.

The unit interfaces several standard TTL-compatible instruments to the IEEE-488 bus by translating their bit-parallel or serial codes, signals or data into the bus' byte-serial format. In operation, the coupler provides all the necessary functions to interconnect an instrument with a bus controller and/or other instruments and functions as a listener, talker or both.

Passive cabling interconnects your instruments to the coupler. You can connect several couplers in parallel on the bus; the system controller outputs command their respective instruments and accept their data. All bus cabling is terminated by the standard IEEE-488 connector.

By properly cabling two instruments to the coupler, you can employ it as a talker/listener to



control one and take data from the other. In any mode of operation, the coupler is a transparent device, acting as though it resides in the instrument being addressed.


The standard 2488A's  $\mu\text{P}$  follows programs contained in a PROM programmed for the manufacturer's and other firms' general-purpose instruments. \$995; interconnect-cable set, \$165.

**Ballantine Laboratories Inc, Box 97, Boonton, NJ 07005. Phone (201) 335-0900. Booth No 1509. Circle No 432**



# Now... a monolithic 4-bit 30-megasample A/D converter

(And only \$29 in 100s.)



ACTUAL SIZE

Our new, monolithic, bipolar 4-bit A/D does its work at a speed of 30 megasamples per second. Since it's fully parallel, it samples without the need for any external sample-and-hold circuit. And it's TTL compatible.

The chip packs 1,000 components, including 15 comparators and an output buffer register. It comes in a 16-pin package that's hardly bigger than a paperclip. And it draws only 250mW of power.

With specs like these, our new TDC-1021J is tailor-made for processors that go into facsimile systems, industrial video and ultrasound imaging. And the price makes the fit perfect: just \$29, in 100s.

And that includes features like...

- $\pm \frac{1}{4}$  LSB linearity
- Binary or two's complement output
- 30 psec aperture jitter
- Single convert signal

The TDC-1021J is available now from stock from Hamilton / Avnet.

**For immediate information call (213) 535-1831 or send coupon. TRW keeps you ahead in digital signal processing.**

#### TRW LSI Products

EDN-4

An Electronic Components Division of TRW Inc.  
P.O. Box 1125  
Redondo Beach, CA 90278

Please send data on the new **TDC-1021J** 4-bit video speed monolithic A/D converter.

Name \_\_\_\_\_

Company \_\_\_\_\_

Div/Dept \_\_\_\_\_ Mail Code \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_


State \_\_\_\_\_ Zip \_\_\_\_\_

**TRW LSI PRODUCTS**  
...for Digital Signal Processing



# Electro/80 Products

## ANALOG DAS

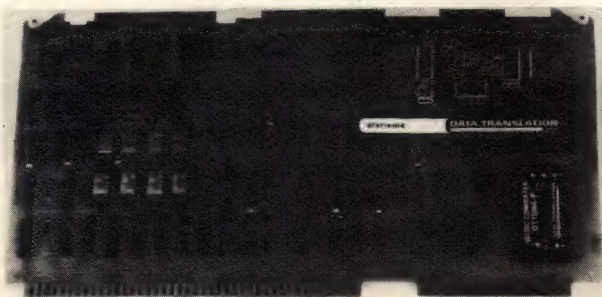


Although it's called an intelligent analog peripheral, Model DT3752 is really a  $\mu$ C-based, stand-alone, single-board analog data-acquisition system. The standard version provides 16 single-ended or eight differential-input multiplexed analog channels, a 12-bit ADC, 35-kHz throughput rate, 16k bytes of dual-port RAM, on-card DMA and serial as well as parallel I/O.

Sporting a 100-M $\Omega$ , 100-pF ON input impedance (100M $\Omega$ , 10-pF OFF), the unit provides 0 to 5V,  $\pm$ 5V, 0 to 10V and  $\pm$ 10V jumper-selectable input ranges. Programmable-gain-amplifier gains of 1, 2, 4 and 8 further extend the input-range options, with gain and offset errors adjustable to zero. ADC linearity equals  $\pm$ 1/2 LSB, and overall analog accuracy stays within  $\pm$ 0.03% FSR. Common-mode voltage specs at  $\pm$ 10V max, and CMRR at 60 Hz is 76 dB min.

Provided with user's manual, software diagnostic tape and either differential or single-ended inputs, the DT3752 costs \$1895.

**Data Translation, 4 Strathmore Rd, Natick, MA 01760.**  
**Phone (617) 655-5300. Booth Nos 602, 04. Circle No 400**

## PC-BOARD RELAYS

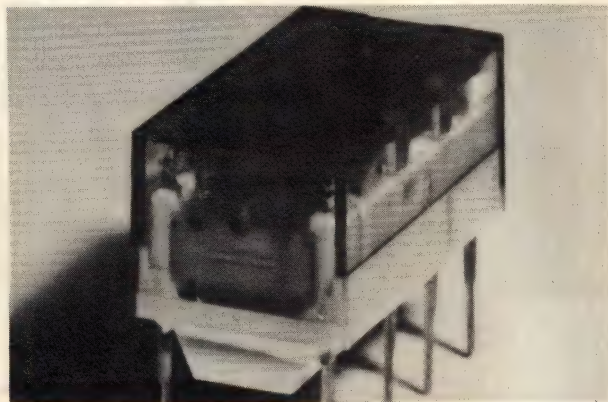


Sealed against wave soldering and cleaning-solvent damage, RD Series DIP-sized relays offer a wide selection of coil-voltage and contact configurations. Insulation resistance specs at 100-M $\Omega$  min, and dielectric strength between contact and coil or opposite-polarity contacts equals 1 kV ac.

Available coil voltages are 3, 5, 6, 12 and 24V dc; requiring 0.5W typ, the relays operate in 6 msec max and release in less than 4 msec. Contact settling time specs at 5 msec max, and electrical life expectancy is more than 500,000 cycles at rated load. Contact arrangements include spdt (3A max), dpdt (2 and 3A), spdt/dpdt (2A) and a 2A-rated, 2-coil 4pdt unit. \$6.20 for a dpdt, 3A (Model RD2V-33) unit.

**IDEC Systems & Controls Corp, 3050 Tasman Dr, Santa Clara, CA 95050. Phone (408) 988-7500. Booth Nos 2020, 23.**  
**Circle No 401**

## SIGNAL ANALYZER

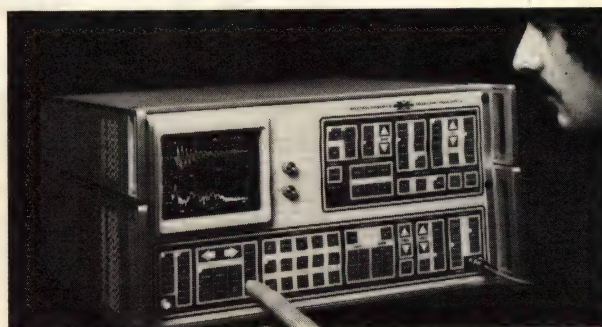

Featuring a full 70-dB dynamic range and touch-control front-panel operation, Model SD345 FFT signal analyzer provides 400-line spectral analysis to 100 kHz. Options include IEEE-488/RS-232 I/O interfaces, 1/8- and full-octave acoustic data analysis and digital spectrum expansion to 100 $\times$ .

With an input impedance of 100 k $\Omega$ , vertical sensitivity spans 10 mV to 20V in 11 steps. The unit's frequency capability ranges from 1 Hz FS to 100 kHz FS in 16 steps.

Operating over a 5 to 45°C range, the unit requires 350W at 115/220V ac. \$12,500. Delivery, 45 to 60 days ARO.

**Spectral Dynamics, Box 671, San Diego, CA 92112. Phone (714) 268-7100. Booth 603.**  
**Circle No 402**

## POWER TRANSFORMERS



Employing toroidal cores, devices in this family of 50/60-Hz power transformers manufactured by Avel-Lindberg Ltd are about 50% smaller and lighter than equivalently rated units. Because there's no air gap, reluctance losses are low—important in "instant-on" applications—and electrically induced hum or noise is eight times lower than that exhibited by stacked, laminated transformers.


Derived from 50 basic types, units in the 40/30 Series come in a wide range of primary and secondary voltage and current combinations. Encapsulated in resin-filled thermoplastic cases, they're offered in flexible-lead and pc-board styles; mounting occurs through 8-32 threaded bushings molded into the case.

All units have dual isolated primary windings, permitting parallel connection for 115V operation or a series hook-up for 230V applications. Additionally, the transformers have dual secondary windings, permitting series, parallel or completely separated outputs. Nominal load ratings extend from 15 through 130 VA, with dual secondaries of 6V (1.25A per winding min) to 40V at 1.62A per winding. 15 VA, \$21.96; 130 VA, \$35.34.

**Connecticut Research Associates Inc, Box 37, Danbury, CT 06810. Phone (203) 744-3020. Booth 2460.**  
**Circle No 403**



# 4,000,000 PICs Prove Our Point.

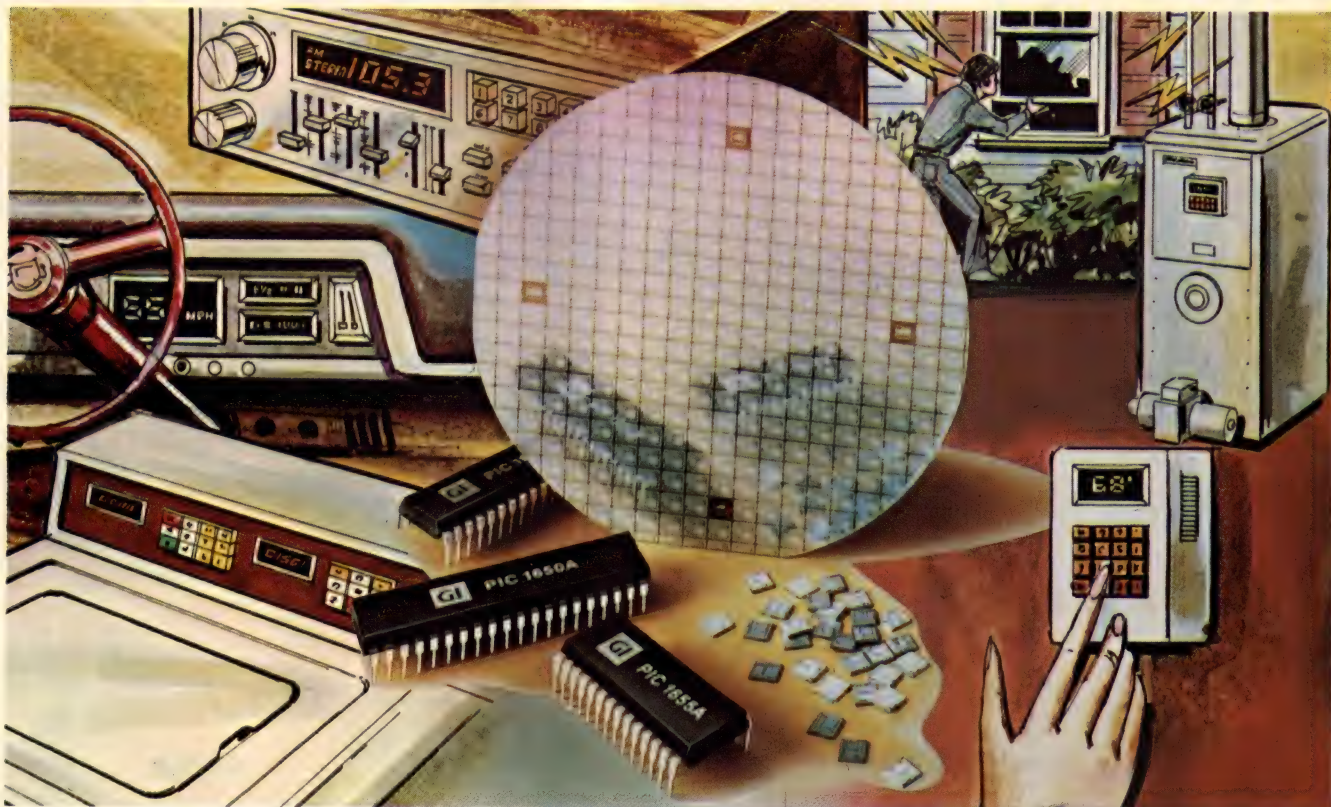

**The point is, more designers are choosing General Instrument PIC microcomputers than ever before.** And they're using them in an ever-widening range of applications; including consumer appliances, energy management systems, electronic games, security systems, keyboards, display drives, TV/radio tuning systems, and automotive dashboard instrumentation, to name but a few.

That's why General Instrument delivered more than four-million 8-bit microcomputers in 1979; more than *twice* as many as our leading competitor.

Big numbers, certainly, but more than that, our record is a direct reflection of the success and

designer acceptance of General Instrument's business philosophy: Deliver high quality products at competitive prices, backed by comprehensive customer service and support. For example, PIC can revolutionize the performance and energy efficiency of universal motors. As a closed loop controller, PIC provides soft starting and current limiting, improves efficiency under variable loads, protects against motor-jam, prevents overheating plus controls speed. What about cost? Remember the facts: General Instrument's PIC microcomputers are already proven cost effective in high volume applications.

To support our many users, we offer a complete set of hardware

and software aids, including the PICAL two-pass assembler program and PICES In-Circuit Emulation System. These help customers in their design, development, and evaluation of a particular application. In short, we deliver more microcomputers, because our microcomputers deliver more to our customers. And that's the *real* bottom line.

For more information on the PIC Series, write to: Microelectronics Division, General Instrument Corporation, 600 West John Street, Hicksville, New York 11802, Attention: Literature Department, or call 516-733-3107.

**We help you compete.**

## GENERAL INSTRUMENT



# How Nicolet fits into this box than

Fitting more oscilloscope into a cubic foot took one big first step—the use of modern digital methods. Plus a lot of little steps such as recognizing what's "oscilloscope," what's not, and keeping the "not" outside where it belongs. Here are some of the great things the digital method has made possible.

## Resolution and Accuracy


Scientists and engineers (thousands of them)



are delighted with the Explorers' 4000-line resolution, and accuracy literally an order of magnitude better than that of analog scopes and other digital scopes.

## Super Storage


Users appreciate the Explorer's waveform




storage. At equivalent writing rates of up to 50 cm/ $\mu$ sec an Explorer can clearly remember, every time, without fade or bloom, literally hundreds of times as much about signals as the finest analog

## 64X Zoom Display






Explorer users enjoy the convenient display that allows them to *zoom in* on details of interest. They also can superimpose "old" signals and

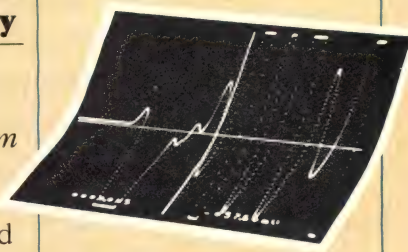

live, "fresh" signals for extremely sensitive observation of differences or changes. They can

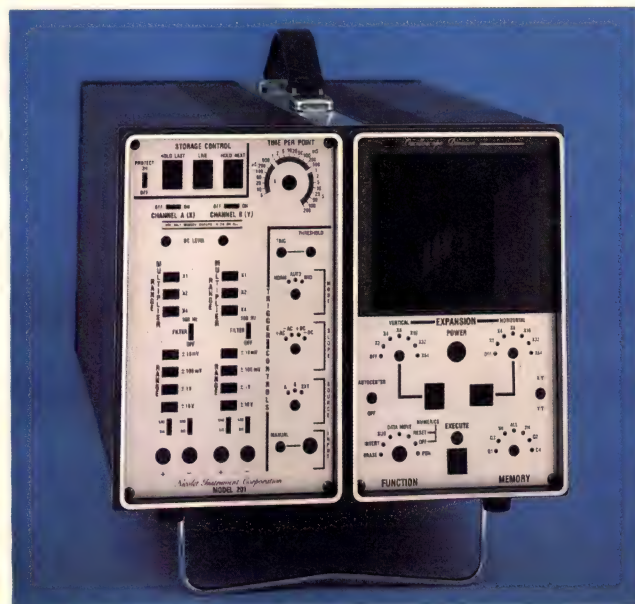

storage scopes. Best of all, Explorers store waveforms with no hassle.



superimpose two (or four) old waveforms, or two live waveforms. And zoom in on details with up to 64X digital display scale magnification.



# more oscilloscope anyone else.

## They're Pure Oscilloscopes

The digital method results in other welcome improvements. Sweep speeds that range down to days in length to allow you to precisely measure very slow phenomena. Pre-trigger sweep start



allows you to see what precedes an event as well as what follows. XY operation provides even greater precision



than servo-driven XY recorders, but at speeds a million times greater. Speeds as high as most analog XY oscilloscopes.

All of these are oscilloscope function improvements. The

## Disk Memory Option


The optional, built-in disk memory can remember signals for years, storing as much data per disk as you could capture



improvements include greater ease of use, for a dozen reasons. The Explorers are "pure oscilloscope." They interface between the signal source and the most intelligent and powerful computer in the world.


You.

on thousands of photos. Disks are inexpensive and reusable, don't need developing, and store data at the touch of a button.

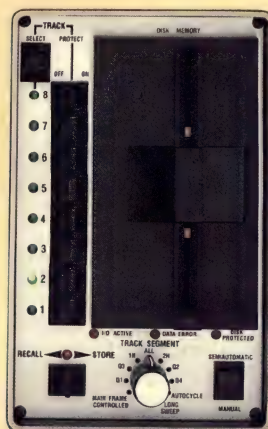

## Matching Your Needs

You can choose the Explorer model that fits your measurement needs from a family of instruments, plug-ins and IEEE-488 or RS-232 options.

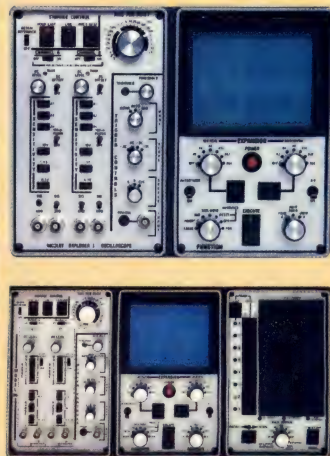

## For More Details

To get complete information quickly, to discuss your application or to arrange a demonstration, call (608) 271-3333.

**NTE** NICOLET  
INSTRUMENT  
CORPORATION  
OSCILLOSCOPE DIVISION

5225 Verona Road  
Madison, WI 53711  
Telephone: (608) 271-3333  
TWX: 910-286-2737  
Sales and Service Offices Worldwide

**ELECTRO SHOW  
BOOTHS 117 & 119**



# Electro/80 Products

## SIGNAL GENERATOR



Spanning 300 kHz to 650 MHz, the Model 460 synthesized signal generator combines a  $-140\text{-dBc/Hz}$  noise-floor figure with stability and accuracy specs of  $\pm 1 \times 10^{-5}/24$  hrs.

Output frequency (displayed on a 9-digit LED readout) is spin-wheel tuned in steps of 1, 10, 100 and 1000 kHz/step with 100 steps/turn. A vernier control provides continuous fine adjustment over a 1-kHz range with 1-Hz resolution.


Internal AM frequencies are 400 and 1000 Hz; an external 3-dB bandwidth capability extends from dc to 100 kHz. External dc-coupled FM rates extend to 150 kHz with maximum peak deviations of at least 300 kHz below a 100-kHz rate. A maximum  $300^\circ$  pk phase deviation is possible for PM rates to 50 kHz.

Options include a built-in frequency doubler and a GPIB interface. \$13,850. Delivery, 6 wks ARO.

**Alltech Div Cutler-Hammer, 2070 Fifth Ave, Ronkonkoma, NY 11779. Phone (516) 588-3600. Booth Nos 216-219.**

Circle No 404

## INSTRUMENT CASES

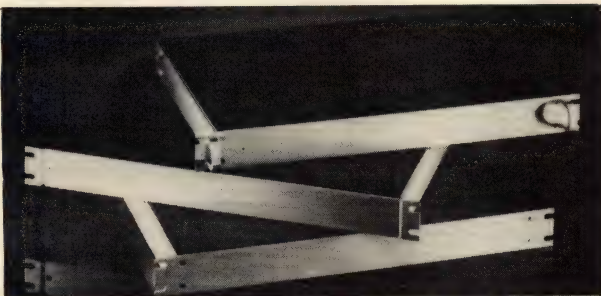

Offered with blue, black or brown vinyl-clad aluminum top and bottom covers, FC Series instrument cases are suitable for mounting small components and large pc boards in standard 19-in. racks. All versions have  $1\frac{3}{4}$ -in. front-panel heights and are available with 10- or 12-in. inside depths.

Several selective-ventilation patterns for the top and bottom covers are standard; customer-specified configurations are optional. A  $\frac{3}{16}$ -in. tubular threaded front-to-back brace and heavy, serrated, front-panel finger pulls are also available. \$37 (50).

**Buckeye Stamping Co, 555 Marion Rd, Columbus, OH 43207. Phone (614) 445-8433. Booth Nos 1422, 24.**

Circle No 405

## PROM-PROGRAMMER MODULE

The UniPak module augments the capabilities of its manufacturer's System 19 PROM and logic-device programmer. You set up the module by simply entering the appropriate 4-digit code for a particular PROM via the System 19's hexadecimal keyboard; the unit's software assembles the programming algorithm and




selects the correct 16- through 28-pin PROM socket.

The algorithm permits programming of more than 200 MOS and bipolar PROMs with typical time savings claimed of one-third to one-half compared with standard programming methods. (For example, a 64k EPROM can be programmed in less than half the time required for a 16k device using standard methods, according to the manufacturer.) \$1800. Delivery, 6 wks ARO.

**Data I/O Corp, Box 308, Issaquah, WA 98027. Phone (206) 455-3990. Booth Nos 1730, 32.**

Circle No 407

## THERMOELECTRIC COOLER

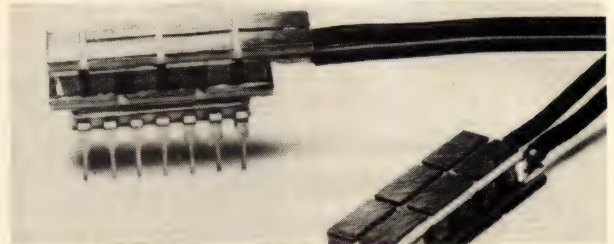

Sandwiched between a DIP and its heat sink, this small thermoelectric module can pump as much as 3.5W of heat out of the DIP.

Measuring  $0.3 \times 1.025 \times 0.21$  in. overall (active area covers  $0.9 \times 0.3$  in.), the unit has a maximum heat-pumping capacity of 3.3W. Operating at a nominal 0.7V dc, it requires as much as 9A, depending on the differential DIP-to-ambient temperature. The module can heat or cool within a maximum temperature differential of  $\pm 60^\circ\text{C}$  so long as the maximum operating-temperature limit of  $125^\circ\text{C}$  isn't exceeded. Model 801-1029-01-00-00, \$4.90 (OEM quantities).

**Cambridge Thermionic Corp, 445 Concord Ave, Cambridge, MA 02238. Phone (617) 491-5400. Booth No 2028.**

Circle No 408

## STEPPER TRANSLATOR

Providing both RS-232 and TTL input/output compatibility, the TM600 translator can provide up to 0.8 hp to Slo-Syn-type stepper motors. In addition to  $\mu\text{P}$  controllability, this modular open-frame unit has an on-board oscillator, permitting manual (off-line) operation at up to 20k half-steps/sec ( $0.9^\circ$  increments).

In the full-step mode, the driver's base speed ranges from 0 to 1k steps/sec; the high-speed range offers 400 to 20k steps/sec.

Designed to control M092 to M172 frame-size motors, the unit requires 120/240V at 50/60 Hz and 12A max. Maximum overall dimensions are  $15\frac{3}{4} \times 13\frac{3}{8} \times 10\frac{1}{4}$  in., and weight equals 54 lbs typ. Provided with temperature and supply-voltage monitors,



**"We stock 150 different analog I/O boards and guarantee delivery in five days. We're turning this business upside down."**

Fred Molinari, President

By our competitors' standards, we run a pretty unorthodox operation.

We stock all the analog I/O our customers need, and we deliver it quickly.

Some of our boards are unique. Many are technically better than their "equivalents" and less expensive to boot.

In fact, we offer the widest selection of high accuracy, high resolution DAS boards in the business.

We stock more Multibus™ compatible DAS than Intel or National. Even some advanced models with on-board intelligence. More LSI-11 and PDP-11 DAS than DEC. And our prices are lower.

We can deliver dual height boards for LSI-11 and quad-size boards with features no one else has. Like DMA, 125KHz throughput to memory, isolated low level, 64 channel analog input capability and DEC compatibility.

What's more, we have an extensive software library to tie it all together. A new catalog to make ordering easier. And free diagnostics and user manuals.





The performance of our PDP-11 Unibus™ analog boards is also unequalled, thanks to isolated low-level, DMA I/O, 64 channel analog input capability, DEC compatibility, and 8 channel analog outputs.

Whether your application is laboratory or industrial, we offer you the means to upgrade your system quickly.

Unlike our "competitors," we'll never leave you hanging.

Data Translation, 4 Strathmore Road, Natick, Massachusetts 01760, (617) 655-5300, Telex: 948474. In Europe: Data Translation Ltd., Reading, Berkshire/England. Phone (0734) 669-335; Telex: 847482.

We stock the industry's widest selection of microcomputer analog I/O systems for DEC LSI-11 and PDP-11, Intel Multibus, Mostek/Prolog STD Bus, Zilog, and Computer Automation.

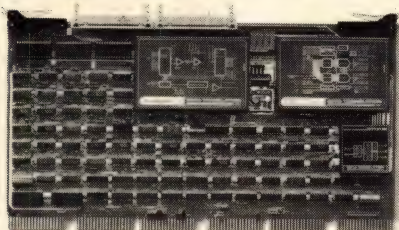

# DATA TRANSLATION


SALES OFFICES AZ 602-994-5400, CA 415-965-9180, 213-681-5631; CO 303-371-2422; FL 305-791-9292, 813-725-2201, GA 404-455-7222; IL 312-960-4054; IN 317-788-4296; MA 617-655-5300; MD 301-636-1151; MI 313-227-7067; MN 612-441-6190; NC 919-723-8102; NJ 609-428-6060; NM 505-292-1212, 505-523-0601; NY 516-488-2100; OH 513-253-6175; OK 405-528-6071; OR 503-297-2581; PA 412-327-8979; TX 713-988-9421, 512-451-5174, 214-661-0300, 713-780-2511, 512-828-2251; UT 801-466-6522; WA 206-455-5846; CANADA 416-625-1907.

Multibus is a trademark of Intel Corp. Unibus, PDP-11 and LSI-11 are trademarks of Digital Equipment Corp.

For more information, Circle No 107




# Electro/80 Products

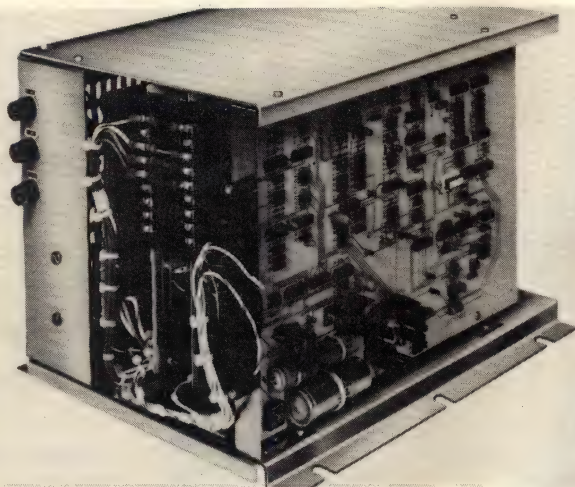

the TM600 operates over 0 to 55°C and costs \$1250.

**Superior Electric Co, Bristol, CT 06010. Phone (203) 582-9561. Booth Nos 2310, 2409-10. Circle No 406**

## ZIF CONNECTORS

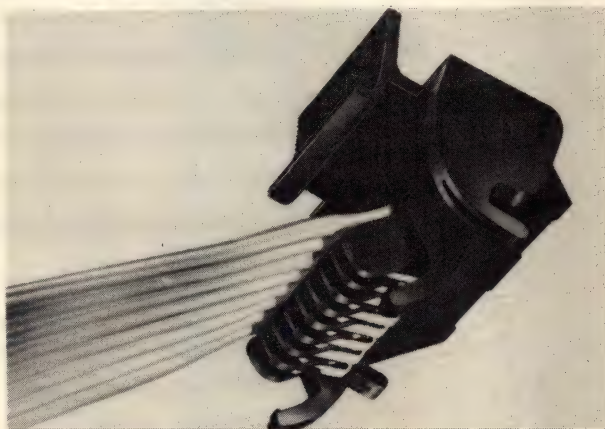

Employing an insulation-displacement contact scheme, Midas Series zero-insertion-force connectors provide a disconnectable interface with pc-board interior surfaces—without the need for an on-board mating unit. Their 4-slot design provides eight separate contact points with each lead, eliminating the need for wire stripping and soldering.

Available with eight through 24 positions, the 100-mil-centered connectors accommodate 24- and 26-AWG leads, permitting currents up to 4.5A.

Because these connectors require so little pc-board real estate, they should find use in such high-density applications as home computers and alarm systems. Approximately \$0.035 per position.

**T&B/Ansley Corp, 817 Morse Ave, Schaumburg, IL 60193. Phone (312) 893-8013. Booth Nos 1234-36, 1333-35. Circle No 409**

## INTERVAL COUNTER

A combination of dual start/stop clock oscillators and a low-speed-logic vernier-interpolation technique allows Model 797 time-interval counter to achieve 100-psec resolution. Trigger level, polarity and slope are all independently adjustable for




both the Start (A) and Stop (B) inputs, permitting three operational modes:

- **Tim**—Measures the interval between two events; these can be selected separate trigger levels or (for rise- and fall-time measurements) the 10%/90% levels of a single pulse
- **Per**—Measures the period (duration) of one input cycle on A input
- **Width**—Measures the width of one input pulse on A.

An optional GPIB interface provides control of mode, slope, polarity and trigger-level functions and outputs the 10-digit interval data. Other options include a temperature-controlled crystal oscillator, 10-turn potentiometers for start/stop trigger level and a 19-in. rack-mounting kit. \$5000. Delivery, 16 wks ARO.

**E-H International Inc, 7303 Edgewater Dr, Oakland, CA 94621. Phone (415) 638-5656. Booth Nos 1407-09. Circle No 410**

## SLIDE SWITCHES

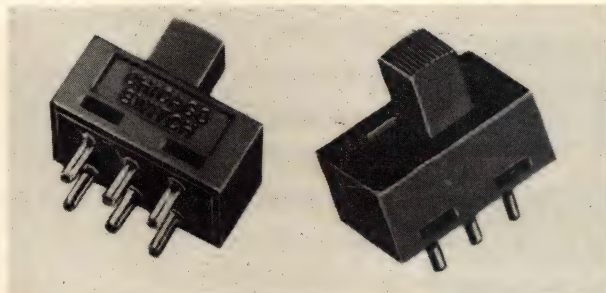

Featuring 2-piece bodies, Series 124 slide switches can be wave soldered without contaminating their contacts. Only the lower base inserts into the pc board and is wave soldered and cleaned; the units' top half is then hand-snapped on.

The switches' hard-gold-and-nickel-over-brass contacts—rated for 500 mA at 125V ac—have initial resistance of 0.02Ω and mechanical life expectancy of 50,000 operations. Insulation resistance equals 100 GΩ, with an interterminal breakdown rating of 1 kV/60 Hz.

Standard configurations include spst, spdt, dpst, dpdt and Form Z. With an overall body size of 0.5×0.3×0.24 in., the units operate over -40 to +100°C. SPST, \$0.28 (10k).

**Chicago Switch Inc, 1714 N Damen Ave, Chicago, IL 60647. Phone (312) 489-5500. Booth No 2322. Circle No 411**

## IC TESTER


Utilizing a control-console/device-module architecture, the LSI-1 integrated-circuit tester can perform full-function parametric evaluation of μPs, RAMs, ROMs and peripheral chips.

The NMOS-μP-governed control console outputs up to two supply voltages, handles system housekeeping tasks, downloads device-module test programs and evaluates test results. Clock independent, the console can interface to an automatic IC handler and an RS-232-compatible data-logging port.

Because each device module contains its own clock, it can perform device tests up to 50 MHz without burdening the



# Whoo?

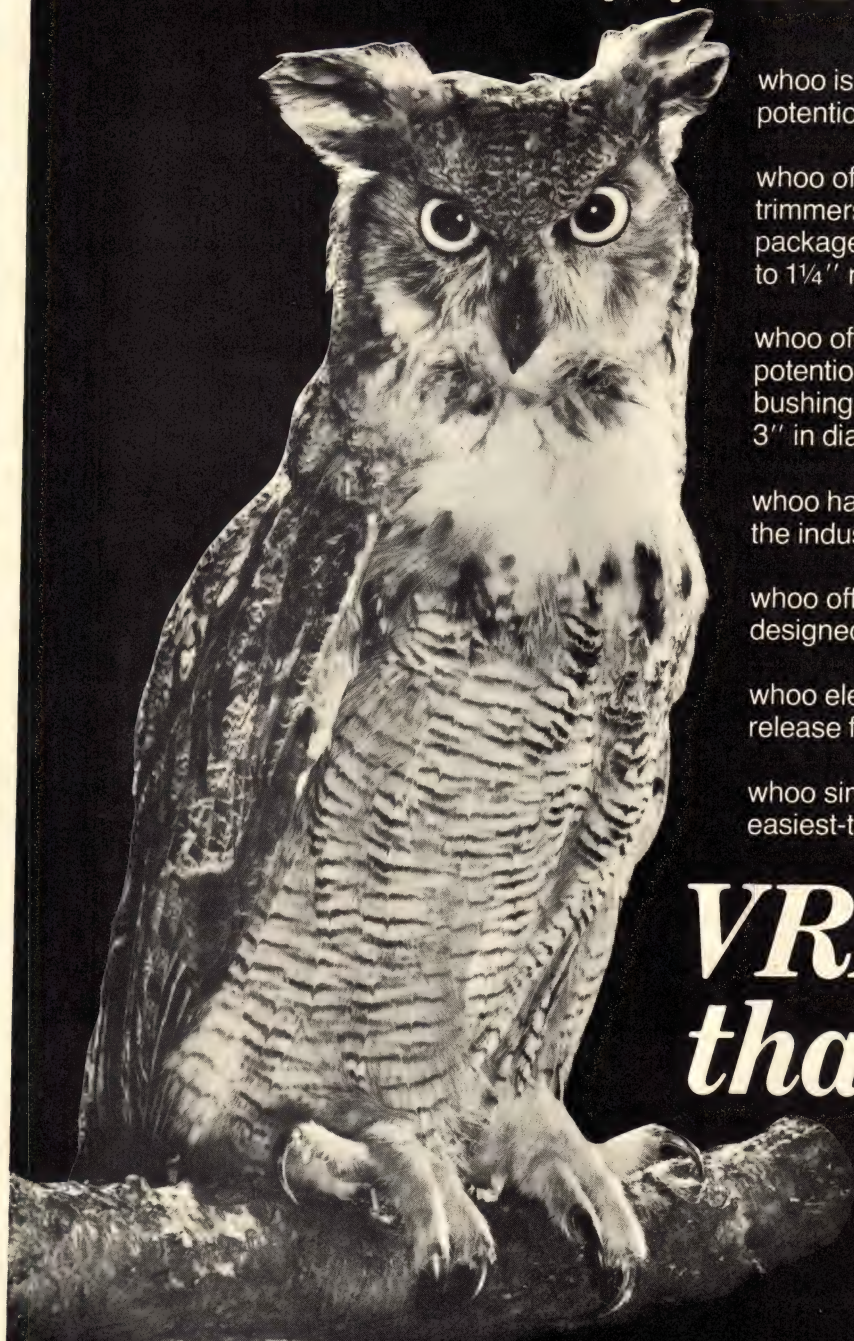

whoo is the fastest growing trimmer and potentiometer manufacturer in the industry?

whoo offers a choice of 96 different standard trimmers. . . both Cermet and wirewound. . . in packages from a compact 1/4" round or square to 1 1/4" rectangular?

whoo offers 49 different standard precision potentiometers with a choice of servo or bushing mounts in a range of sizes from 1/2" to 3" in diameter and up to 30 turns?

whoo has more than 30 years of experience in the industry?

whoo offers the widest range of custom designed trimmers and potentiometers?

whoo electrically tests every unit 100% before release for shipment?

whoo simplifies selection through the easiest-to-use product catalog in the industry?

## VRN... *that's whoo!*

Protect  
our wildlife.

Write for our catalog today!

**VRN** <sup>100%  
tested</sup>  
INTERNATIONAL  
Manufacturers of precision  
potentiometers, trimmers  
and dip switches

A Division of Vornitron Corp.


P. O. Box 44000, St. Petersburg, FL 33743

Tel: 813-347-2181/TWX: 810-863-0357/TELEX: 523417






# Electro/80 Products

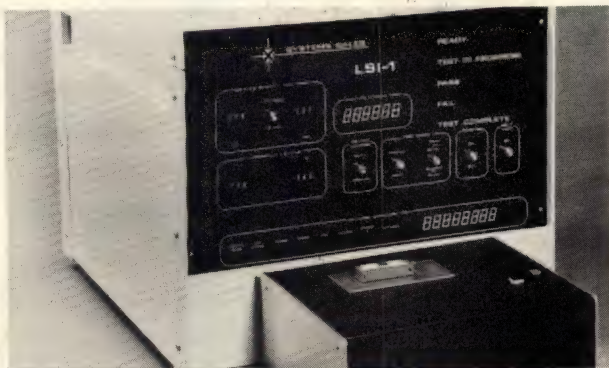

control console. A key feature of the test system is its no-reference-part approach: Device modules contain ROM-stored stimulation and results patterns, eliminating the need for known-good devices. \$8495 for basic unit; individual device modules from \$1500.

**System Sales Inc, 3330 W Dundee Rd, Northbrook, IL 60062. Phone (312) 564-9280. Booth No 1505. Circle No 412**

## GPIO INTERFACE BOARD

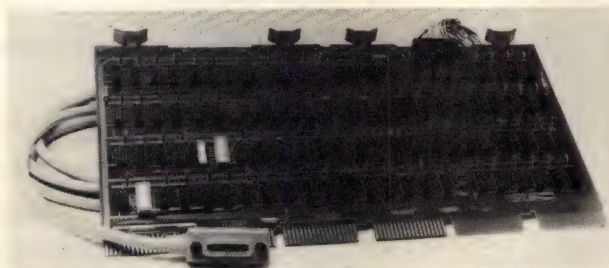

Plugging into any hex-wide SPC slot, the GPIB11-2 interface provides hardware for decoding GPIB talker, listener and controller functions and can be used in single- or multicontroller systems.

A switch-selectable option provides transfer rates of up to 500k bytes/sec (3-state operation) or 250k bytes/sec (open collector). The high-speed operation is provided by circuitry that automatically holds the Unibus for 16-byte bursts before releasing it to higher priority tasks.

Support software includes drivers, utilities and an interactive control program. The driver program, including the interrupt-service routines, can be assembled as a FORTRAN-, macro- or BASIC-callable subroutine package for stand-alone use or as a handler under RT-11 or RSX-11 operating systems. \$1995, including 4m cable and software.

**National Instruments, 8900 Shoal Creek Blvd, Austin, TX 78758. Phone (512) 454-3526. Booth No 1503. Circle No 413**

## TERMINAL BLOCKS



Regular barrier terminal blocks are generally molded in long,


single-color lengths—requiring users to stock a range of sizes and figure out a color-coding scheme. Not so with JB6 and JB7 Series units.

Both versions of the click-together blocks are available in blue, red, green, black and natural, and both carry a 20A rating; the  $\frac{3}{8}$ -in. version is spec'd at 300V and the  $\frac{1}{4}$ -in. type at 600V. Terminal styles include pc pin, solder turret, quick connect (insulated and uninsulated feedthrough) and surface mount.

Molded of UL 94V-0-rated nylon, the blocks have a 105°C max operating temperature. \$9.40 (100) for a typical unit.

**RDI/Reed Devices Inc, 525 Randy Rd, Carol Stream, IL 60187. Phone (312) 682-4100. Booth No 3119. Circle No 414**

## SETPOINT CONTROLLERS

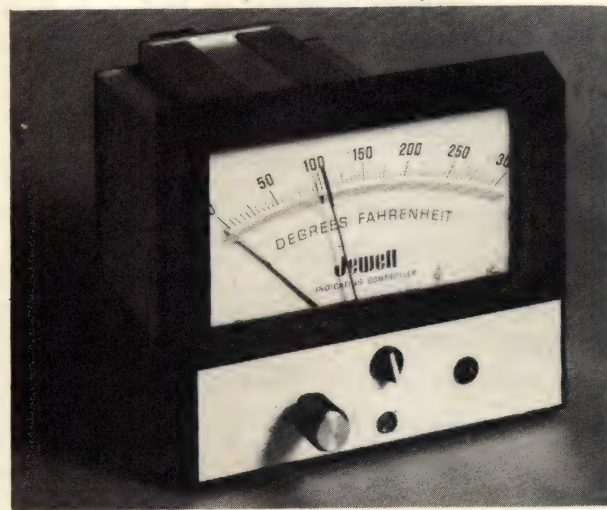

Featuring a wide selection of ac, dc and temperature ranges, 368 through 370 Series indicating setpoint controllers can provide either on/off or time-proportioning control. Housed in a standard  $\frac{1}{4}$  DIN housing, they provide a 4-in. mirror-backed scale and offer a choice of vertical or horizontal mounting.

Fifteen standard dc current ranges span 0 to 5  $\mu$ A (5-k $\Omega$  input resistance) through 0 to 50A. The dc-voltage-measuring models span 0 to 5 mV (680 $\Omega$ ) through 0 to 300V (3 M $\Omega$ ); the two ac units cover 0 to 5A (0.02 $\Omega$ ) and 0 to 150V at 1 k $\Omega$ /V.

The single—and optional double—setpoints control a 5A dpdt relay and are settable over the full-scale range. With a 1-sec-max meter-response time, the units require 5W typ from a 105/130V or 210/260V ac source.

Model 368 (dc ranges), \$148; Model 369 (ac ranges), \$165; Model 370 (temperature ranges), \$176.

**Jewell Electrical Instruments Inc, Grenier Field, Manchester, NH 03108. Phone (603) 669-6400. Booth No 2249.**

**Circle No 415**

## CLOCK GENERATOR

Containing four synchronized 50-MHz channels, the PI-100A clock generator is a plug-in instrument that interfaces with Tektronix TM-500 Series power modules. Its 2V min outputs can drive TTL and ECL devices over unterminated 50 $\Omega$  lines.

Master clock A generates clock periods varying from 20 nsec to 2 msec; it can be synchronously gated (producing pulse bursts) or single-pulse-to-pulse triggered at rates to 50 MHz. Channels B, C and D can each be delayed from 10 nsec to 1 msec with respect to A and furnish normal or inverted outputs. All



## TYPE 287P STYRAGON® CAPACITORS



# LOW COST, TIGHT CAPACITANCE TOLERANCE

- Polystyrene film dielectric . . . rugged epoxy coating.
- Capacitance tolerances . . .  $\pm 1\%$ ,  $\pm 2\%$ ,  $\pm 3\%$ .
- Extended foil construction avoids reliability and inductance problems of laid-in-lead imports.
- Short lead times . . . unlike uncertain deliveries of imported film capacitors.
- Standard capacitance values from 100 pF to .1  $\mu$ F. Voltage ratings of 50 and 100 WVDC.

Write for Engineering Bulletin 2052.3 to  
Technical Literature Service, Sprague Electric Co.,  
491 Marshall St., North Adams, Mass. 01247

45P-0102

THE BROAD-LINE PRODUCER  
OF ELECTRONIC PARTS


**SPRAGUE**  
THE MARK OF RELIABILITY

a subsidiary of **GK Technologies**

For more information, Circle No 109

## SERIES JX5400 FILTERS

. . . U.L. Recognized



# SUPPRESS POWER LINE EMI

- Reduce noise emanating from or interfering with equipment.
- Furnished in 4 different circuit configurations suppressing both common mode (line-to-ground) and differential mode (line-to-line) interference.
- Ideal for filtering external transients in 150 KHz—30 MHz range in equipment containing low-level logic circuitry.

Write for Engineering Bulletin 8212 to  
Technical Literature Service, Sprague Electric Co.,  
491 Marshall St., North Adams, Mass. 01247.

45F-7152B1


THE BROAD-LINE PRODUCER  
OF ELECTRONIC PARTS

**SPRAGUE**  
THE MARK OF RELIABILITY


a subsidiary of **GK Technologies**

For more information, Circle No 110

## TYPE 193D DOMINO® CAPACITORS



(2x actual size)



# HIGH $\mu$ F, LOW PROFILE

- Solid-tantalum capacitors with two standard terminal configurations . . . leadless with flush solderable pads, or extended-tabs.
- Fully-molded construction eliminates possibility of mechanical damage during handling and mounting.
- Excellent stability . . . undesirable parametric changes and catastrophic failures due to mechanical degradation are minimized.
- Capacitance values from .082 to 100  $\mu$ F, voltage ratings from 3 to 35 WVDC.
- For  $-55^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  operation . . . to  $+125^{\circ}\text{C}$  with voltage derating.

Write for Engineering Bulletin 3532A to  
Technical Literature Service, Sprague Electric Co.,  
491 Marshall St., North Adams, Mass. 01247.

45E-8145R1

THE BROAD-LINE PRODUCER  
OF ELECTRONIC PARTS

**SPRAGUE**  
THE MARK OF RELIABILITY

a subsidiary of **GK Technologies**

For more information, Circle No 111

## TYPE 834P METFILM® 'S' CAPACITORS



# THE 'ZERO TC' CAPACITOR

- Metallized polysulfone-film section in rectangular molded plastic case offers superior electrical characteristics, small size, rugged construction.
- Capacitance change is typically  $\pm 0.25\%$  over broad temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .
- Low dissipation factor (high Q), low dielectric absorption.
- Capacitance tolerances as close as  $\pm 1\%$ .

Write for Engineering Bulletin 2610 to  
Technical Literature Service, Sprague Electric Co.,  
491 Marshall St., North Adams, Mass. 01247.

45D-8123R1

*Dearborn* electronics  
division  
SPRAGUE ELECTRIC COMPANY

**SPRAGUE**  
THE MARK OF RELIABILITY

a subsidiary of **GK Technologies**

For more information, Circle No 112



# Heinemann has it. NOW

## A resettable pushbutton circuit protector— small size, small price.



We call it the **Re-Cirk-It®** protector. You'll call it the perfect replacement for those old-fashioned cylindrical fuses and fuseholders.

The **Re-Cirk-It** protector looks like a conventional  $\frac{5}{8}$ " fuseholder. In fact, it installs in the same panel space. But that's where the resemblance ends. Your customer will never have to worry about blown fuses with the **Re-Cirk-It** protector. Or nuisance tripping caused by normal starting surges. A white band signals when it's tripped, with reset as easy as pushing a button. No bothersome fuses to replace.

No unnecessary and expensive service calls. Of course, the **Re-Cirk-It** protector is UL-recognized and CSA-approved. Current ratings from 0.25 through 15A at up to 250Vac and 32Vdc are available at your Heinemann distributor's.

Don't re-fuse. **Re-Cirk-It!** Request Bulletin KD-4001 or call our toll-free number: **1-800-257-9590**.



**The only independent manufacturer of fully-magnetic circuit breaker.**  
**We serve you better.**



**HEINEMANN**  
TRENTON, NJ 08650



# A low cost storage scope with autotrigger...another better product from Kikusui.

We call it the 5516ST. Rugged and portable, this dual-trace 10MHz scope will do everything that Tek's T912A will do...and a lot more. It offers a combination of features that are unequalled by any other instrument in its price range. Features such as an *enhance* capability that lets you vary the writing speed from 20 to 40  $\mu\text{s}/\text{cm}$ ; a *hold* button that freezes the waveform on the CRT for up to one hour; and a patented *autoerase* that lets you set any predetermined hold time from one to thirty seconds. After the preset time the waveform is automatically erased and the sweep circuit is reset. The 5516ST also has an ADD mode, an XY mode and four trigger modes.

But there's a lot more to this KIK-scope than performance and specifications. For one thing, your KIK-scope is completely modular. All components are on plug-in boards. In the event of trouble, just send us the faulty board and we'll send you a replacement by return mail. This swap-out program assures fast maintenance turnaround and minimum down-time. Then there's our 2-year warranty (CRT 1-year). That's twice as long as the warranty from most manufacturers and a reflection of the confidence we have in the quality components and workmanship that go into all KIK-scopes.

And, just to give you a little added assurance, your KIK-scope comes with a 30-day "satisfaction-or-your-money-back" insurance policy. We

wouldn't make an offer like this if we weren't sure we had a better scope.

In addition to the Model 5516ST, there are nine other KIK-scopes in the line from 10MHz to 50MHz. They're described in our new catalogs along with our lab power supplies and other instruments.

Kikusui International Corporation  
17121 South Central Ave., Suite #2M  
Carson, California 90746  
(213) 638-6107 • TWX: 910-346-7648



A subsidiary of  
KIKUSUI ELECTRONICS CORP., JAPAN

For more information, Circle No 113


Erase Interval  
Control:  
1 to 30 secs

Writing Speed Control:  
20 to 40  $\mu\text{s}/\text{cm}$

5X Horizontal  
Magnification

Sweep Time:  
0.5  $\mu\text{s}/\text{div}$  to  
1s/div in 20 Steps

4 Trigger Modes:  
Complete Auto (p-p),  
Auto, Norm, Single

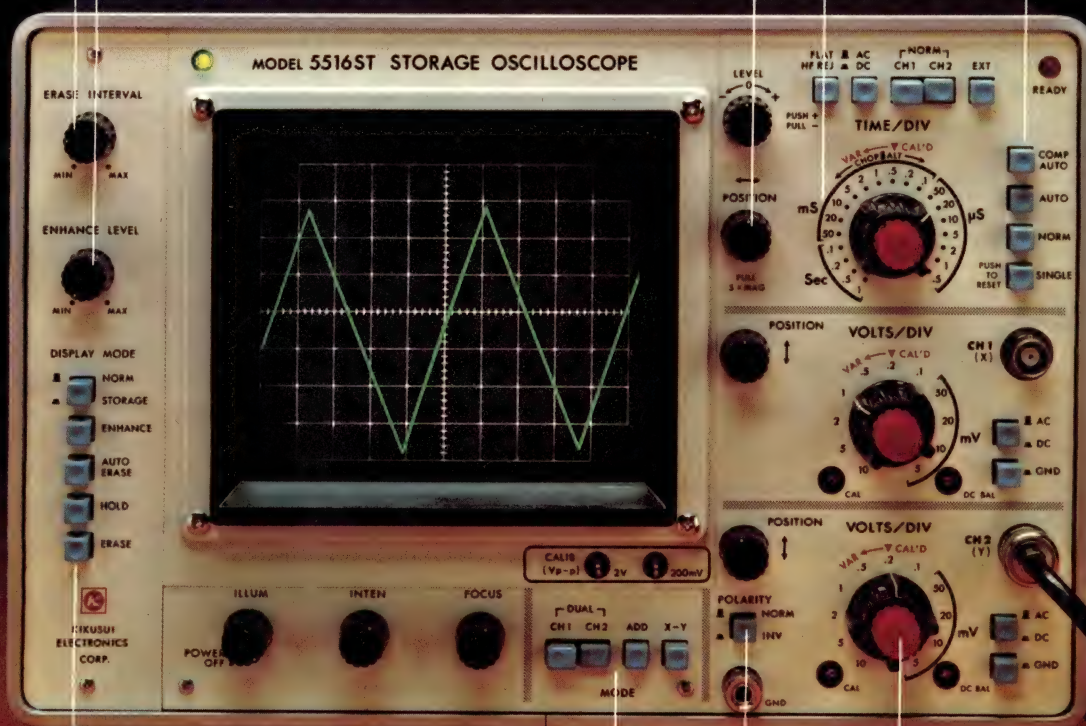

5 Storage Controls  
Norm, Store, Enhance,  
Auto Erase, Erase, Hold


4 Vertical Modes:  
Channel 1, 2, Add, X-Y

Channel 2  
Polarity

Sensitivity:  
5mV/div to  
10V/div  
in 11 Steps



# Electro/80 Products

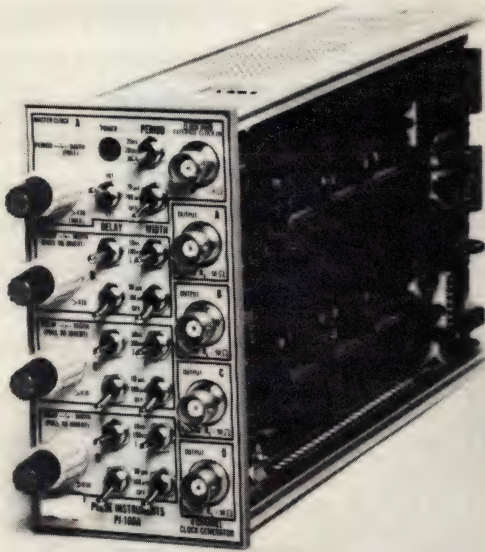


channels provide pulse widths variable from 10 nsec to 1 msec. Driving a terminated 50Ω line, the 2V-min output pulses exhibit rise and fall times of less than 7 nsec. \$790.

**Pulse Instruments Co, 1536 W 25th St, San Pedro, CA 90732. Phone (213) 541-3204. Booth Nos 1505, 07.**

Circle No 417

## OPEN-FRAME SWITCHERS

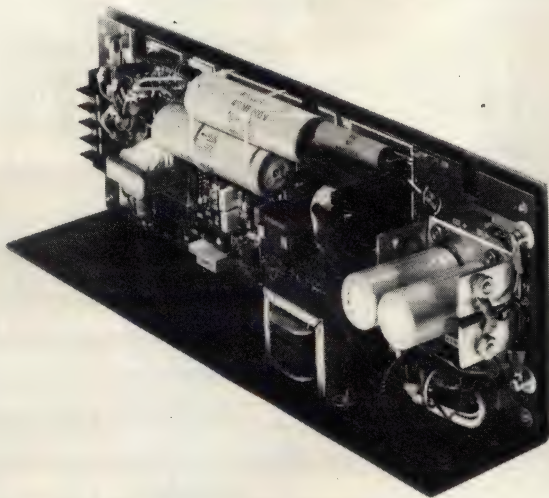


Designated the 250 T&Q Series, these open-frame multioutput switching power supplies achieve up to 80% efficiency at a rated 250W output. Available in four models, they provide various output combinations of 5, 12 and 15V dc at up to 25A.

The two triple-output units provide 5, 12 and 12V dc outputs at 25, 4 and 4A and 5, 15 and 15V at 25, 4 and 4A. Quad-output units deliver 5, 5, 12 and 12V at 25, 1, 4 and 4A and 5, 5, 15 and 15V at 25, 1, 4 and 4A.

Triple-output units (250T), \$310; quad-output versions (250Q), \$335.

**Standard Power Inc, 1400 S Village Way, Santa Ana, CA 92705. Phone (714) 558-8512. Booth No 2437. Circle No 418**

## POSITION SENSORS

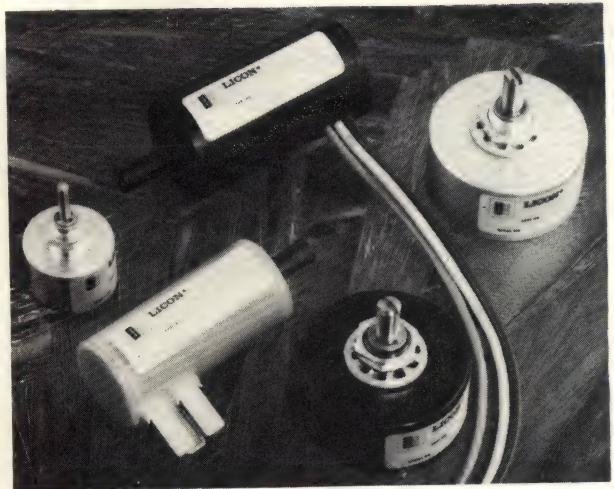

Available in linear and rotary versions, Series 33 position sensors employ two ferrite tubes wound as inductors and connected in series. Attached to each unit's input shaft, a permanent magnet linearly varies the core's differential inductance in direct relation to shaft position. When excited with an ac signal, the sensors output an ac voltage linear and proportional to position.

Driven with a 3 to 7V, 50- to 250-kHz sine or square wave, the linear sensor produces an output that varies over an approximately 6:1 range for a ½-in. shaft travel; a 2.5:1 output variation is generated by the rotary unit for a 50° shaft rotation.

Operating over -40 to +150°C, both sensor types have 25°C linearity of ±2%. \$15 to \$20 (1k), depending on type and specs.

**Licon, 6615 W Irving Park Rd, Chicago, IL 60634. Phone (312) 282-4040. Booth Nos 2021-23.**

Circle No 416

## INTELLIGENT DMM




The 5½-digit Model 8860A features two μPs, which control its front-panel-selectable functions and permit operation with two mutually exclusive options—IEEE-488 interface and calculator control.

As a stand-alone DMM, the mainframe measures dc volts (to

*Continued on pg 156*



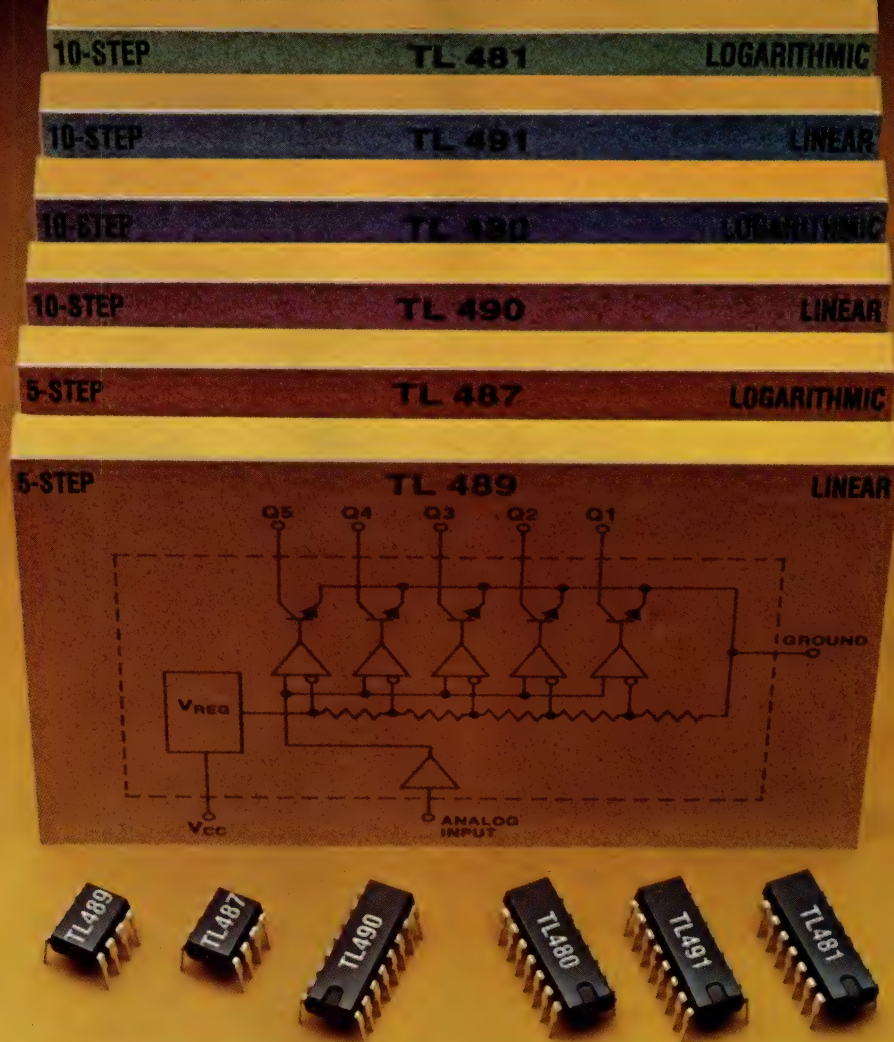

# Versatile analog level detectors. From Texas Instruments.

Our line of monolithic analog level detectors is designed to meet all your cost/performance goals.

Each is unique. Because it combines a large number of components on a single chip — and sells for a fraction of the individual component cost.

## Design flexibility

Now designers have more flexibility for a wider variety of applications.

Applications such as warning signal indicators, analog-to-digital converters, feedback regulators, industrial controls, audio level indicators — even light intensity and frequency detection.

## Two degrees of resolution

TI analog level detectors are available as five and ten step detectors in both

linear and logarithmic scale formats. For applications requiring greater resolution than 10 levels, the 10-step linear detectors can be cascaded to detect up to 80 levels.

Device	Input	Steps	Display Type	Price* 100 Pcs.
TL489	Linear	5	LED	\$0.65
TL487	Logarithmic	5	LED	0.65
TL490	Linear	10	LED	1.08
TL480	Logarithmic	10	LED	1.20
TL491	Linear	10	VF	1.22
TL481	Logarithmic	10	VF	1.30

Commercial temperature (0°C to 70°C) operating range versions in plastic dual-in-line packages.  
\*U.S. prices, subject to change without notice

Both open-collector and open-emitter output options are offered to yield an extremely versatile family of products capable of being custom-tailored to specific applications, using significantly less power than discrete versions.

Analog level detectors from Texas Instruments. A simple, cost-effective solution to all your level-sensing applications. Send for brochure CL-410A for complete details.

**For more information** call your nearest authorized TI distributor, or write Texas Instruments Incorporated, P.O. Box 225012, M/S 308, Dallas, Texas 75265.



**TEXAS INSTRUMENTS**  
INCORPORATED

For more information, Circle No 114



## How STC speeds production testing by a factor of five to one...

Storage Technology Corporation's revolutionary 8650 Winchester disc subsystem for big, main-frame computers utilizes double-density recording to pack twice the normal amount of data in the same space as a conventional, single-density disc.

Critical to the success of this technology are complex, high-speed, analog read/write and servo boards. In fact, STC's read/write board contains more than 350 separate active and passive components.

When conventional methods were used, it took approximately 15 minutes to test each board. As this testing time became more and more unacceptable, the decision was made by STC to switch to automatic testing.

Paul Zieschang, Manager of Hardware Development, recommended that the company assemble its own system using 12 HP-IB compatible instruments, an HP 9835A Desktop Computer as system controller and a 9885 Disc. Zieschang reports that the 9835A was chosen because its large CRT display made it easy for an operator to interface with the system, and



because of its programming ease. What's more, STC incorporated diagnostics into the system which help STC technicians better understand the testing procedure. This software even helps technicians locate — via a flashing cursor and a graphic display of the board's topology — the position of any component on the board. Finally, the 9835A also delivers a print-out of the component's value and STC part number.

### **Documentation simplifies system configuration.**

According to Zieschang, some of the many application notes supplied by Hewlett-Packard were helpful both in deciding the first configuration and speeding assembly of STC's first HP-IB system.

### **Flexibility that reduces the chance for obsolescence and speeds assembly.**

Twelve HP-IB compatible instruments were chosen for this system, according to Zieschang, because HP's bus architecture and programming ease permit the flexibility necessary to make changes within the system as STC's requirements change and, thus substantially reduce the possibility of system obsolescence.

HP instruments also provide STC with speed of assembly. The company assembled and programmed its first automatic






using HP-IB  
“designed  
for systems”  
instruments  
and computers.

test system faster than other comparable ways of solving its system test needs. Zieschang believes they will be able to assemble and program future systems even faster.

#### The bottom line.

Just as important, Zieschang says the STC HP-IB compatible system will reduce testing time from 15 minutes per board to approximately three minutes. A factor of five to one. The system is also expected to reduce the time required to debug faulty boards from 45 to 20 minutes. In short, STC's HP-IB system will help the company turn out more boards per day.

Why not consider the HP-IB solution for your production test needs? For complete details, send for our brochure, “Do your own system design in weeks, instead of months.” Simply write to Hewlett-Packard, 1507 Page Mill Road, Palo Alto, CA 94304. Or call the HP regional office nearest you: East (201) 265-5000, West (213) 970-7500, Midwest (312) 255-9800, South (404) 955-1500, Canada (416) 678-9430.



**HP-IB: Not just a  
standard, but a  
decade of experience.**



**HEWLETT  
PACKARD**

For more information, Circle No 115




# Electro/80 Products

0.01% accuracy for 1-yr calibration), true-rms ac volts (ac or dc coupled) and resistance by means of 2-terminal or 4-terminal methods. Front-panel functions include manual or autoranging selection, pushbutton dc and ohms zero, Offset (subtracts a constant from a measured value, Limit (indicates whether a measured value falls outside a specified range) and Peak-to-Peak (stores highest and lowest readings).

The IEEE-488 interface permits three reading rates from 2.5 (5½ digits) to 45 (3½ digits) readings/sec and features a Learn mode. The calculating-controller option allows 100-step reverse-Polish-notation keystroke programming via an external keyboard. This option makes measurement data available for use in programs containing algebraic, trigonometric, logarithmic, indirect-addressing, comparison and branching functions. Mainframe, \$1395; IEEE interface, \$295; calculator control, \$550. Delivery, 6 wks ARO.

**John Fluke Mfg Co Inc, Box 43210, Mountlake Terrace, WA 98043. Phone (206) 774-2322. Booth Nos 200-208, 300-309. Circle No 422**

## PULSE GENERATOR

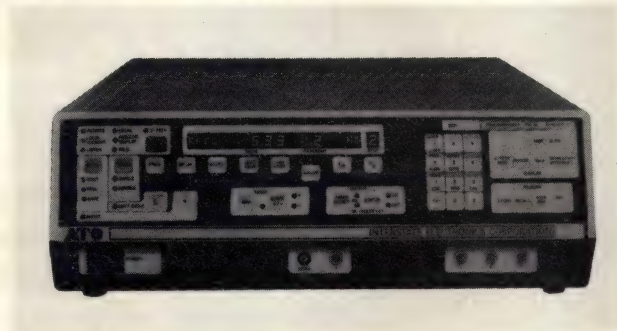

Exhibiting maximum rise and fall times of 7 nsec for a 20V output pulse, Model 2021 pulse generator is ideal for ATE applications. Its self-contained GPIB interface, in conjunction with a built-in memory, controls all pertinent test parameters. PRF, delay, width, rise and fall times, amplitude, mode and offset can all be specified, stored and recalled for up to 10 separate tests. Even with the power off, a rechargeable battery keeps the memory alive for about 4 wks.


You can position the 0.1 to 20V output pulse within a -20 to +20V window. PRF extends from 10 Hz to 50 MHz, with a delay range of 10 nsec to 10 msec. You can also vary pulse width over a 10-nsec to 10-msec span, and an option permits rise and fall times between 5 nsec and 50 msec. \$5195. Delivery, 60 days ARO.

**Interstate Electronics Corp, 1001 E Ball Rd, Anaheim, CA 92803. Phone (714) 635-7210. Booth Nos 1408-10. Circle No 419**

## CABLE-SOCKET SYSTEM

High-speed data interconnects usually employ twisted-pair lines to ensure signal shielding—a technique that allows a 40-pin connector to handle only 20 signals. The Model SGF socket, however, employs an integral busing system that groups and mass-terminates the common cable-ground wires, enabling a 40-pin socket to carry 38 shielded signal lines and two grounds. Additionally, you can split the integral bus at any location, permitting allocation of any grouped set of I/O pins to a specific ground-voltage level—a feature that eases pc-board layout.

A companion pc-board mounting header completes the

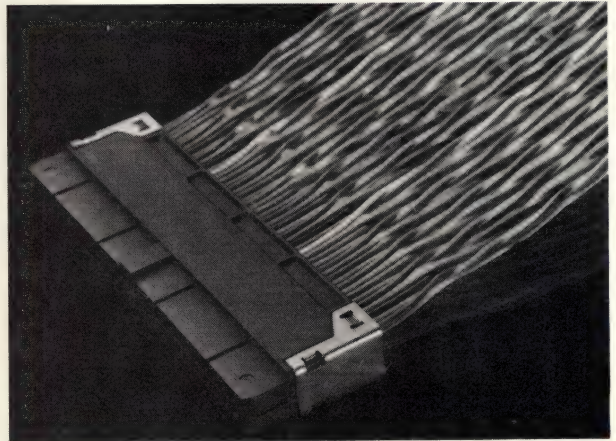


system. Featuring full 4-sided shrouding and a high-strength housing, this Type SGH unit comes with vertical or right-angle pinouts and an integral grounding option.

Electrical specifications for the SFG/SGH system include maximum contact resistance of 0.01Ω at the 1A dc max continuous rating. Operating temperature spans -55 to +105°C.

Model SGF terminated 2-ft cables from less than \$25; SGH header, \$2.50 (1k). Delivery, 6 wks ARO.

**Augat Inc, 33 Perry Ave, Attleboro, MA 02703. Phone (617) 222-2202. Booth Nos 1117-23. Circle No 421**

## DIGITAL STORAGE SCOPE

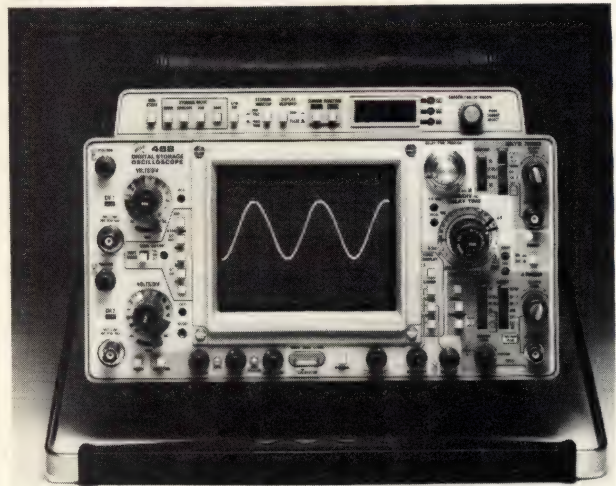

By combining a display-interpolation technique with a 25M-sample/sec, 8-bit digitizer, Model 468 achieves a 10-MHz useful storage bandwidth. Utilizing the interpolation concept, the unit requires 2.5 samples per cycle to achieve this capability.

The scope's Envelope mode uses dual sampling rates and selectable sweep rates to store a waveform's maximum and minimum envelope values. It can capture glitches, view wave-shape excursions and detect aliasing. A jitter-correction circuit factors out the ±½-sample-interval shifting caused by an asynchronous trigger-point/sample-clock relationship. The unit's 1024-word memory can store up to 2×512- or 4×256-word waveforms. Options include signal averaging and GPIB. From \$5000. Available in August. Delivery, 16 wks ARO.

**Tektronix Inc, Box 500, M/S 76-260, Beaverton, OR 97077. Phone (800) 547-1512. Booths 100-10, 201-11. Circle No 420**



*The great hope of society is  
in individual character.*

—W.E. Channing



Individual character. It's also the great hope of a company. Especially an innovative company like Mostek.

Our foundation is people. Resourceful people. So the strength of our success evolves from the strength of our people. The worth of their ideas, their dedication to our growth, their willingness to help us progress through change.

In return, our obligation is to provide a working environment that nourishes those individual strengths. To us, that means delegating responsibility. Encouraging creative freedom and independent thought. Rewarding jobs well done. Recognizing the



individual wants and needs of all our people.

Judging by our success, it's an approach that works. In just ten years, Mostek has become the world leading supplier of dynamic RAMs. An innovator

leader in microcomputers and systems, and a pioneer with clear dominance in the telecommunications market, supported by the broadest product line available.

Individual character. The more we encourage it, the stronger we expect to grow. Call us or write Mostek, 1200 West Crosby Road, Carrollton, Texas 75006, (214) 323-8806.

**MOSTEK**



# Health insurance for irregular voltage.

Two of the simplest, most reliable ways to keep AC line power steady and clean for sensitive electrical and electronic equipment are Sola's CVS Transformers and Solatron/Acuvolt® Line Voltage Regulators.

The CVS, a ferroresonant sinusoidal constant voltage design, blocks out brownouts and transient voltage dips or spikes. It holds output voltage within  $\pm 0.5\%$  of nominal throughout input variations ranging to  $\pm 15\%$ , for loads from 30 VA to 7.5 kVA.

Solatron/Acuvolt Line Voltage Regulators are

solid state static-magnetic designs that combine tight regulation with fast response, adjustable output, remote sensing and high capacity, up to 750 kVA.

Both provide line-to-load isolation with no moving parts. Compact, no-maintenance construction suits industrial and marine as well as business and institutional applications.


For free literature, contact Sola Electric, 1717 Busse Road, Elk Grove Village, IL 60007. Phone (312) 439-2800.

**The Power Protectors**

GS

**SOLA**

50 YEARS 1930-1980

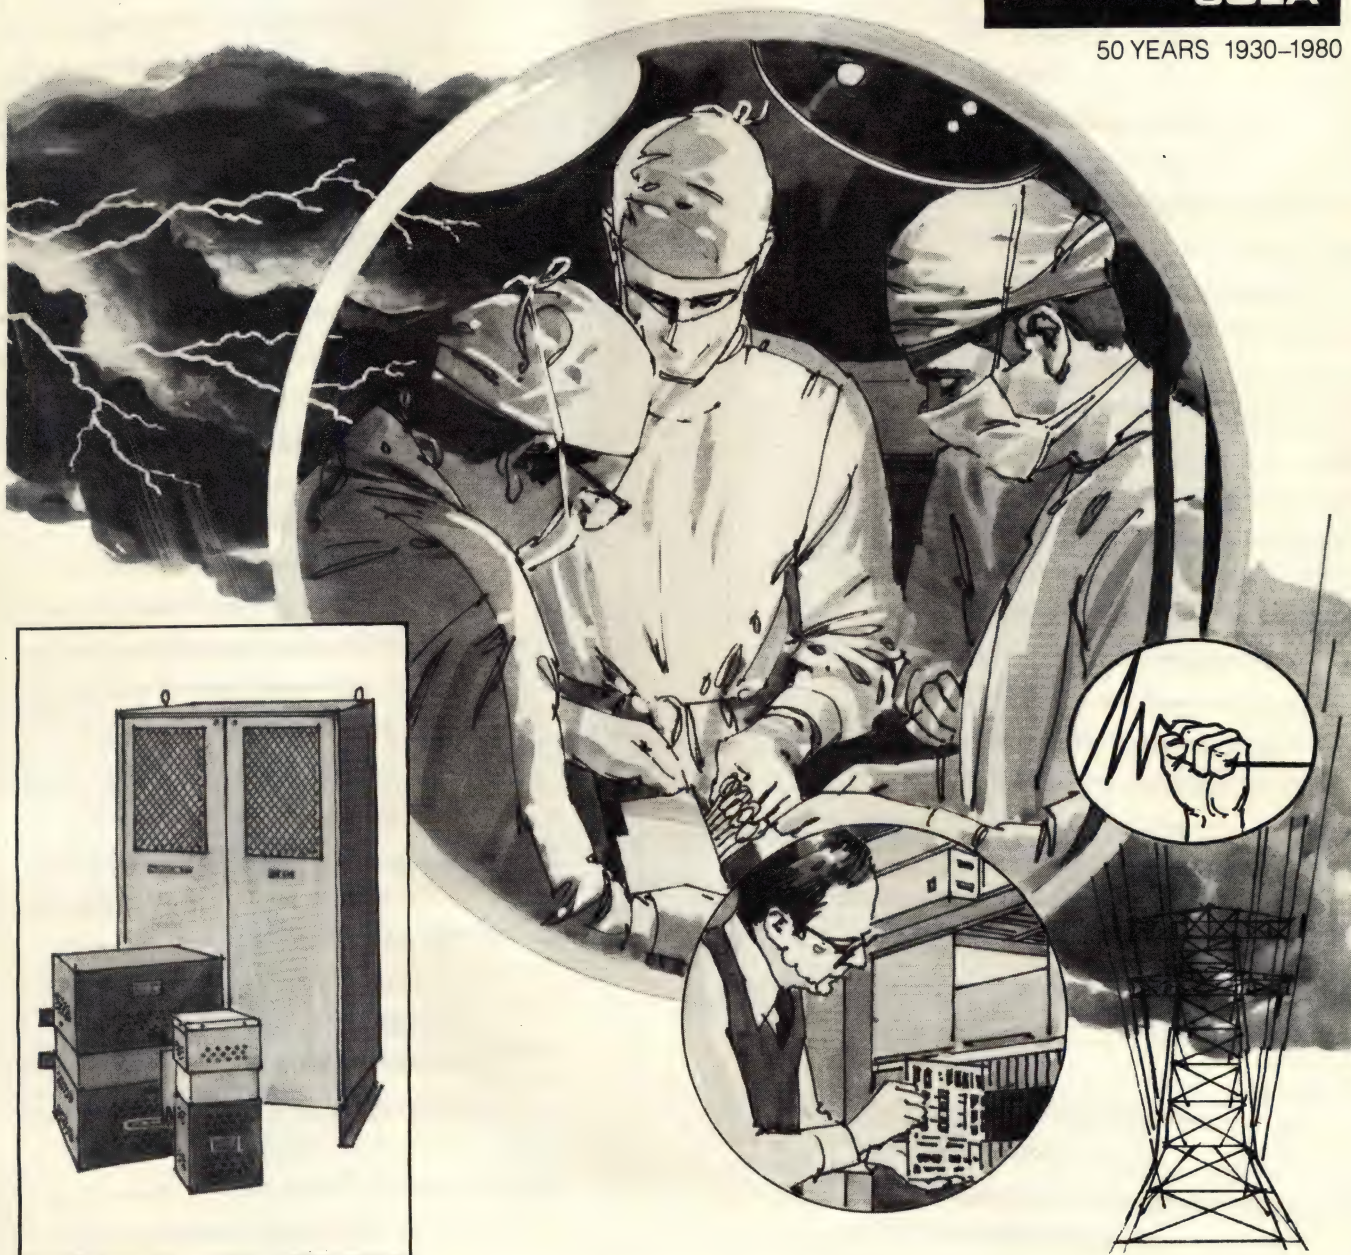

For more information, Circle No 117






**Carbon film resistors? Metal film resistors?  
Trimmer potentiometers?**

**Why wait?  
Piher has over  
100 million in stock.**

All Piher components are manufactured under exacting standards in modern facilities with the most advanced automated production equipment. Our customers include major American manufacturers of consumer electronics.

And Piher offers the finest service in the industry. Our facilities are designed to handle your orders promptly and efficiently. Our courteous and knowledgeable

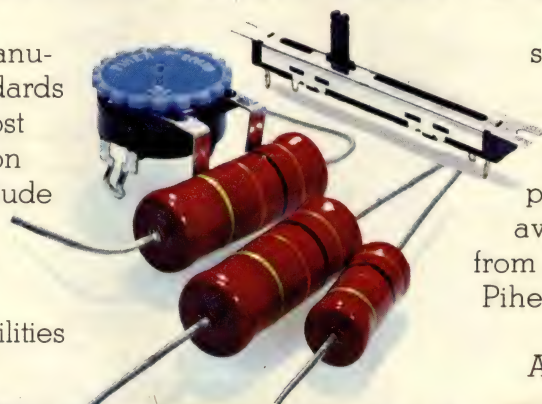

Piher resistors are available in 1/4W, 1/2W, 1W and 2W at 5% tolerance. Unique design of Piher potentiometers prevents penetration of dust, cleaning fluids or solvents.

sales staff is always ready to answer your inquiries.

If you require the finest in passive components, competitively priced and always available for prompt delivery from stock, Piher is *your* source!

Piher International Corporation  
505 West Golf Road  
Arlington Heights, IL 60005




**PIHER**

**call toll free 800-323-6693**

*Remember, the PIHER name says it all—*


**P**recision • **I**n-stock • **H**ighest quality • **E**xcellent service • **R**easonably priced



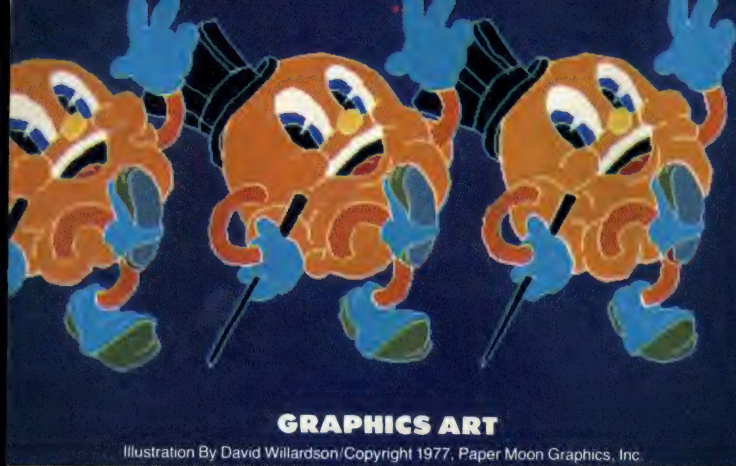


## GRAPHICS ART


Illustration By David Willardson/Copyright 1977, Paper Moon Graphics, Inc.

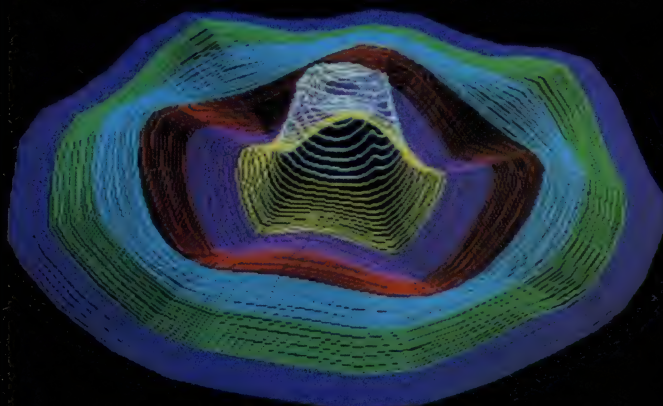

## ENGINEERING, SCIENTIFIC AND MATHEMATICAL ANALYSIS

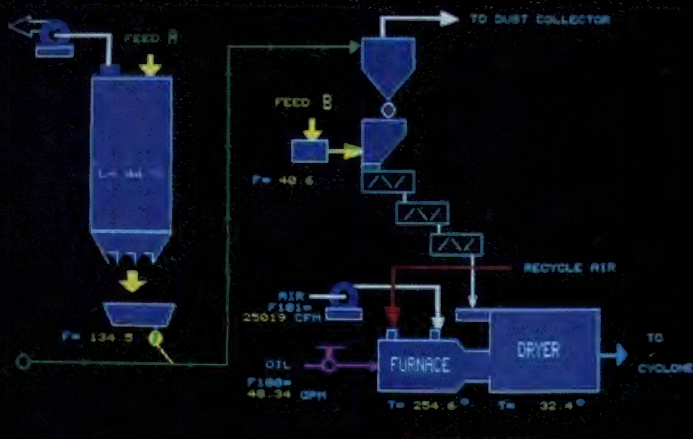


## PROCESS CONTROL AND MONITORING

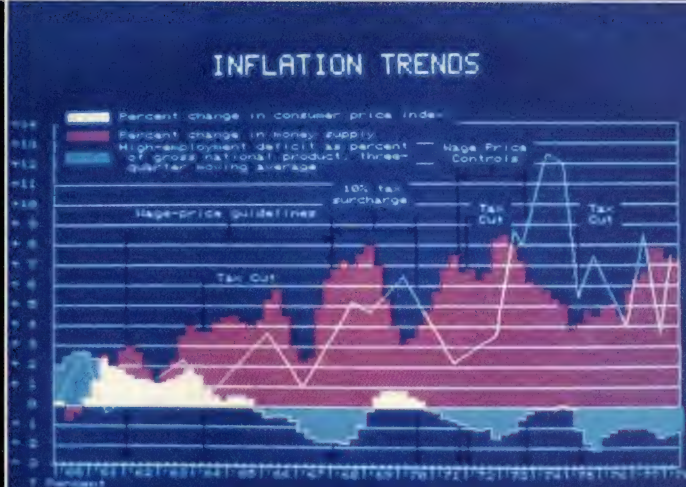

## BUSINESS GRAPHICS

# HERE'S A COLORFUL DISPLAY OF OUR VERSATILITY.

No matter what type of business you're in, our popular CG Series of color graphics computers can give you vivid insights into every phase of your operations. Even our largest and most sophisticated clients keep telling us they're

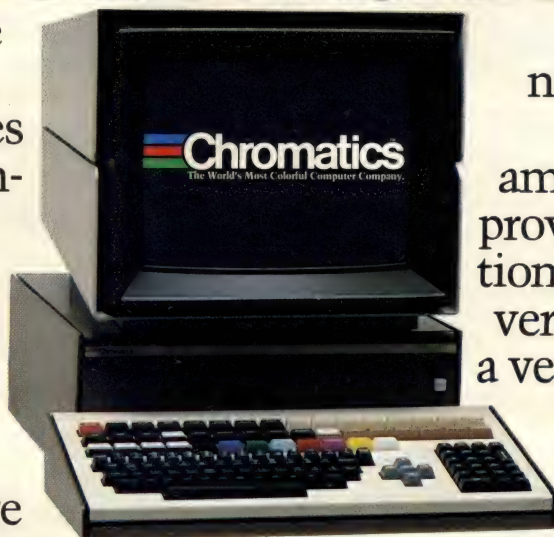

coming up with innovative applications that save amazing amounts of time while providing vital information. If that's the kind of versatility you'd like in a very reasonably priced color graphics computer, contact your nearest sales rep.

## FROM BUSINESS GRAPHICS TO PROCESS CONTROL, CHROMATICS CAN SOLVE ALL OF YOUR APPLICATIONS NEEDS.

**SALES REPRESENTATIVES:** **USA:** AL: Huntsville Col-Ins-Co. 800/327-6600. AZ: Phoenix Thorson Co. 602/998-2444. CA: Southern U.S. Graphics Marketing Corp. 213/880-4062. CA: Northern Thorson West 415/964-9300. CO: Littleton Davis & Assoc. 303/795-1400. CT: Bartlett Assoc. 914/949-6476. DE: Bartlett Assoc. 301/656-3061. DC: Bartlett Assoc. 301/656-3061. FL: Ft. Lauderdale Col-Ins-Co. 800/432-4480. FL: Orlando Col-Ins-Co. Inside Fla. 800/432-4480. Local 305/423-7615. GA: Atlanta Col-Ins-Co. 800/327-6600. IL: Northern Dylec/Central, Inc. 312/394-3380. IN: Dylec/Central, Inc. 317/247-1316. IA: Eastern Dylec/Central, Inc. 319/683-2282. IA: Western Professional Mktg. Services 612/474-5939. LA: Baton Rouge Col-Ins-Co. 800/327-6600. ME: Bartlett Assoc. 617/879-7530. MD: Bethesda Bartlett Assoc. 301/656-3061. MA: Framingham Bartlett Assoc. 617/879-7530. MI: Detroit WKM Assoc. 313/588-2300. MN: Professional Mktg. Services 612/474-5939. NH: Bartlett Assoc. 617/879-7530. NJ: Bartlett Assoc. 914/949-6476. NM: Albuquerque Thorson Co. 505/265-5655. NY: Holcomb Bartlett Assoc. 716/657-6309. NY: White Plains Bartlett Assoc. 914/949-6476. NC: Winston-Salem Col-Ins-Co. 800/327-6600. OH: Cleveland WKM Assoc. 216/267-0445. OH: Dayton WKM Assoc. 513/434-7500. OR: Portland DPM, Inc. 503/258-8203. PA: Pittsburgh WKM Assoc. 412/892-2953. PA: Wayne Bartlett Assoc. 215/688-7325. RI: Bartlett Assoc. 617/879-7530. SC: Greenville Col-Ins-Co. 800/327-6600. TX: Austin Thorson Co. 512/451-7527. TX: Dallas Thorson Co. 214/233-5744. TX: Houston Thorson Co. 713/771-3504. UT: Davis & Assoc. 303/795-1400. VT: Bartlett Assoc. 617/879-7530. VA: Northern Bartlett Assoc. 804/421-7330. VA: Southern Col-Ins-Co. 800/327-6600. WA: Seattle DPM, Inc. 206/453-9082. WI: Eastern Dylec/Central, Inc. 312/394-3380.

**FOREIGN COUNTRIES, EUROPE & NEAR EAST:** Techexport, Inc. 617/661-9424. **AUSTRALIA:** Crows Nest, NSW TCG 439-6477. **BELGIUM:** Brussels Spesi (02) 37491-12. **CANADA:** 404/447-8797. **FRANCE:** Techdata 749-40-37. **ISRAEL:** Eldan Electronic Instrument Co., Ltd. 533 221 533 242. **SCANDINAVIA:** Sweden Teleinstrument AB 08-380-370. **SOUTH AFRICA:** Pretoria Infodata Pty. Ltd. 01278-8141. **SWITZERLAND:** W. Stolz AG 057-54655. **UNITED KINGDOM:** Bournemouth Techex Ltd. 0202-293-115. **WEST GERMANY:** Techdata GmbH 31025-6.

© Chromatics, Inc. 1980

Chromatics, Inc., 3923 Oakcliff Industrial Court, Atlanta, Georgia 30340 Telephone 404/447-8797 TWX 810/766-4516

For more information, Circle No 126



# Universal active filters make designing a snap

*UAFs offer designers uninitiated in network theory the ability to construct complex filter configurations. An example illustrates the process.*

**John Tsantes**, Eastern Editor

Hybrid universal active filters have simplified the job of active-filter design: By employing relatively straightforward techniques, you can construct relatively complex filters—even if your filter-design know-how is comparatively limited. And the promise of monolithic versions of these devices (EDN, March 20, pg 49) offers the possibility of even greater design flexibility in the future.

The design procedure summarized here illustrates the ease with which you can obtain even complex filter responses with today's devices. This example employs General Instrument's ACF7092C, but because all UAFs are essentially the same, the technique applies to all of them.

## A review of basic theory

First, a quick overview of basic active-filter network theory.

A second-order function, termed the biquadratic, is the basic building block employed in the synthesis of a large class of active filters:

$$H(s) = \frac{K(s + z_1)(s + z_2)}{(s + p_1)(s + p_2)} \quad (1)$$

For complex poles and zeros,

$$\begin{aligned} z_1 &= \text{Re}(z_1) + j\text{Im}(z_1), p_1 = \text{Re}(p_1) + j\text{Im}(p_1) \\ z_2 &= \text{Re}(z_1) - j\text{Im}(z_1), p_2 = \text{Re}(p_1) - j\text{Im}(p_1). \end{aligned} \quad (2)$$

Because a pair of poles can be represented in terms of the pole frequency ( $\omega_p$ ) and the pole  $Q$  ( $Q_p$ ) and a pair of zeros can be treated similarly, you can rewrite the biquadratic formula as:

$$H(s) = \frac{Ks^2 \left( \frac{\omega_z}{Q_z} \right) s + \omega_z^2}{s^2 + \left( \frac{\omega_p}{Q_p} \right) s + \omega_p^2} \quad (3)$$

The equation then appears in the basic form employed by all filter manufacturers for outlining design steps in their UAF data sheets.

A filter's dc gain is

$$20 \log_{10} \left| K \left( \frac{\omega_z^2}{\omega_p^2} \right) \right|,$$

and its infinite-frequency gain is given by

$$20 \log_{10} |K|.$$

The pole  $Q$ , which determines the filter's sharpness at  $\omega_p$  (the point of maximum response) is

$$Q_p = \frac{\omega_p}{(BW)_p}$$

where  $BW$  is the filter's bandwidth. Similarly, the zero  $Q$  is

$$Q_z = \frac{\omega_z}{(BW)_z}$$

and measures the sharpness of the filter's minimum response.

Low-pass filters pass frequencies ranging from dc to the cutoff frequency  $\omega_p$ ; a high-pass filter passes frequencies from this cutoff frequency to  $\infty$ . Similarly, a bandpass filter passes signals that lie between two frequencies ( $\omega_1$  and  $\omega_2$ ), and a band-reject (notch) filter rejects frequencies in a stopband bounded by  $\omega_3$  and  $\omega_4$ .

For these four cases, Eq 3 becomes:

### Low pass (LP):

$$H(s) = \frac{\omega_p^2}{s^2 + \left( \frac{\omega_p}{Q_p} \right) s + \omega_p^2}$$

### High pass (HP):

$$H(s) = \frac{s^2}{s^2 + \left( \frac{\omega_p}{Q_p} \right) s + \omega_p^2}$$

### Bandpass (BP):

$$H(s) = \frac{\left( \frac{\omega_p}{Q_p} \right) s}{s^2 + \left( \frac{\omega_p}{Q_p} \right) s + \omega_p^2}$$

### Band reject (BR):

$$H(s) = \frac{s^2 + \omega_z^2}{s^2 + \left( \frac{\omega_p}{Q_p} \right) s + \omega_p^2}$$

With these basic equations, you can obtain any desired filter response.



## UAFs offer the promise of virtual cookbook design

The poles of the biquadratic function are the values of  $s$  that make the denominator zero. Similarly, the zeros are the  $s$  values that make the numerator zero. Using these definitions and Eq 2, you can solve for  $s$ ,  $\omega_p$  and  $Q$ :

$$s = a \pm jB \quad (a, B = \text{constants})$$

$$\omega_p = \sqrt{a^2 + B^2}$$

$$Q = \frac{\omega_p}{2a}$$

Thus, by picking the values of  $a$  and  $B$ , you can locate the poles to provide the desired response. Equations exist to tell you where to put the poles of a transfer function in order to achieve a certain response shape; the well-known Butterworth, Chebyshev, Bessel and Cauer (elliptical) approximations can also serve. Many references also supply look-up tables that list the various parameters and constants for a desired response. Here's a brief review of the four basic responses:

- A Butterworth response, also termed maximally flat, yields a filter with its flattest amplitude response in the passband. Here, the cutoff frequency's attenuation rate is  $n \times 6$  dB/octave, where  $n$  is the filter's number of poles, or order.
- A Chebyshev response yields a filter with its maximum attenuation rate beyond the cutoff frequency but adds ripple to the passband. This equiripple property means that the filter's error

oscillates between maxima and minima of equal amplitude in the passband. Chebyshev approximation tables are usually categorized in terms of maximum ripple, measured in decibels.

- The Bessel response offers excellent phase-shift linearity. Its amplitude cutoff is not as sharp as that of the Butterworth or Chebyshev response, but it does offer a linear phase response. Bessel filters pass rectangular signals with a minimum amount of distortion and with a delay time linearly proportional to the phase-shift characteristic. In other words, the time delay through the filter is almost constant with respect to frequency and equal to the slope of the filter phase characteristic.
- The Cauer response yields a filter with equiripple in the passband and stopband and has a steeper transition than the Butterworth or Chebyshev responses. This elliptic approximation is one of the most commonly used functions in the design of active filters, because with it, a filter of a lower order can achieve results similar to those of the Chebyshev and Butterworth responses. Because a lower order filter requires fewer components, this approximation produces the least expensive filter realizations.

### A UAF design example

For simplicity, the following design example refers to the cutoff frequency as  $\omega_n$ . Most manufacturers employ either this symbology or  $\omega_c$  in their literature.

For the ACF7092C (Fig 1), the equations describing the three available outputs are:

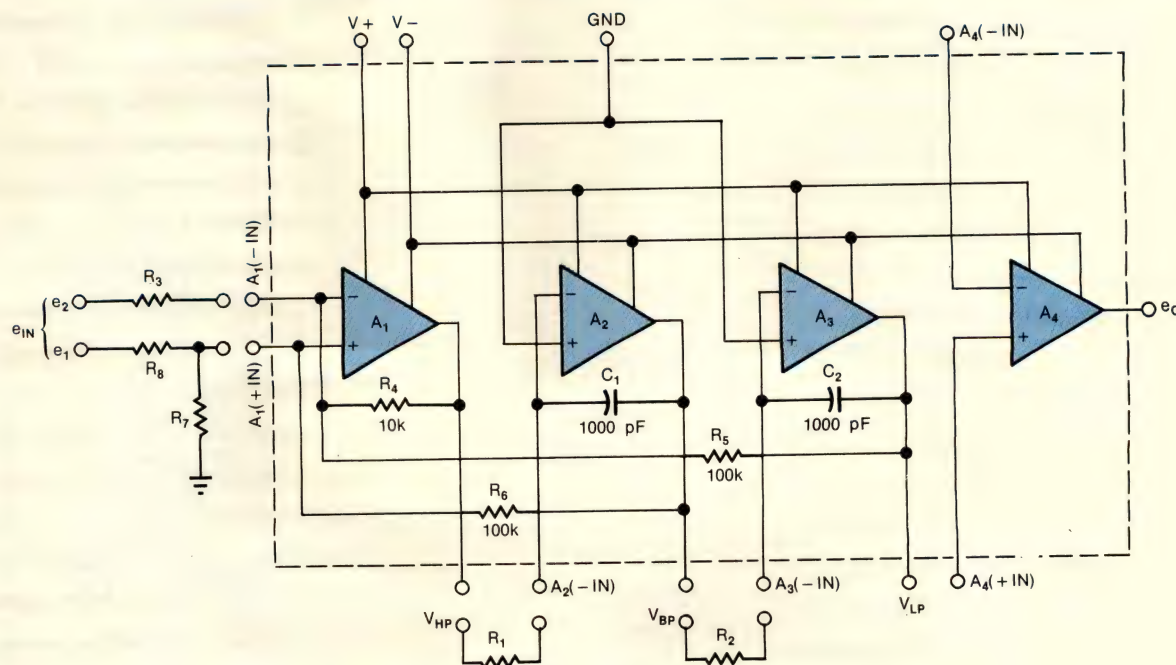


Fig 1—The universal active filter used in this article's design example, General Instrument's ACF7092C is similar to most other UAFs.



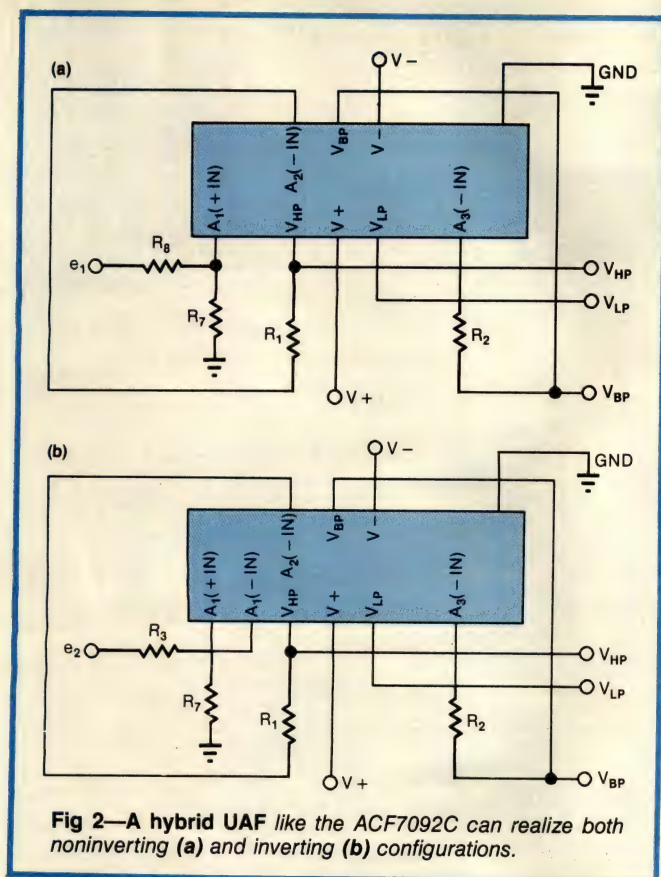


Fig 2—A hybrid UAF like the ACF7092C can realize both noninverting (a) and inverting (b) configurations.

$$G_{(LP)} = \frac{G_{LP} \omega_n^2}{s^2 + \left(\frac{\omega_n}{Q}\right)s + \omega_n^2}$$

$$G_{(BP)} = \frac{G_{BP} \left(\frac{\omega_n}{Q}\right)s}{s^2 + \left(\frac{\omega_n}{Q}\right)s + \omega_n^2}$$

$$G_{(HP)} = \frac{G_{HP} s^2}{s^2 + \left(\frac{\omega_n}{Q}\right)s + \omega_n^2}$$

To obtain band-reject characteristics, you can sum the low-pass and high-pass outputs to form a pair of  $j\omega$ -axis zeros:

$$G_{(BR)} = \frac{A(s^2 + \omega_n^2)}{s^2 + \left(\frac{\omega_n}{Q}\right)s + \omega_n^2}$$

In these equations,  $f_n = \omega_n/2\pi$  is the natural or corner frequency for low- or high-pass outputs and the center frequency for a bandpass output. Additionally,

$s$ =transform variable

$G_{HP}$ =gain at infinite frequency (high pass)

$G_{BP}$ =gain at center frequency (bandpass)

$G_{LP}$ =gain at zero frequency (low pass)

$A = G_{LP} = G_{HP}$

$Q$ =center frequency/bandwidth (bandpass)

$Q$ =gain at natural frequency/gain at infinite frequency (high pass)

TABLE 1 — CALCULATION OF GAIN

	NONINVERTING FIG 2a	INVERTING FIG 2b
$G_{HP}$	$a_1(1 + a_3 + a_4)$	$-a_4$
$G_{BP}$	$-\frac{a_1}{a_2}$	$\frac{a_4}{a_2(1 + a_4 + a_3)}$
$G_{LP}$	$\frac{a_1(1 + a_3 + a_4)}{a_3}$	$-\frac{a_4}{a_3}$

TABLE 2 — CALCULATION OF  $R_3$  OR  $R_8$

CONFIGURATION	NONINVERTING FIG 2a	INVERTING FIG 2b
LOW PASS	$R_8 = \frac{316k}{Q_{DESIGN}}$	$R_3 = 100k$
BANDPASS	$R_8 = \frac{Q_{DESIRE}}{Q_{DESIGN}} (100k)$	$R_3 = Q_{DESIGN} (31.6k)$
HIGH PASS	$R_8 = \frac{31.6k}{Q_{DESIGN}}$	$R_3 = 10k$

TABLE 3 — CALCULATION OF  $R_7$

CONFIGURATION	NONINVERTING FIG 2a	INVERTING FIG 2b
LOW PASS	$R_7 = \frac{100k}{3.16(Q_{DESIGN}) - 1}$	$R_7 = \frac{100k}{3.8(Q_{DESIGN}) - 1}$
BANDPASS	$R_7 = \frac{100k}{3.48(Q_{DESIGN}) - 2}$	$R_7 = \frac{100k}{3.48(Q_{DESIGN})}$
HIGH PASS	$R_7 = \frac{100k}{0.32(Q_{DESIGN}) - 1}$	$R_7 = \frac{100k}{6.64(Q_{DESIGN}) - 1}$

$Q$ =gain at natural frequency/gain at dc (low pass).

The design equations for these transfer functions are:

$$\omega_n = \sqrt{a_3 \omega_1 \omega_2}$$

$$\text{where } \omega_1 = \frac{1}{R_1 C_1}, \omega_2 = \frac{1}{R_2 C_2}$$

$$Q = \left[ \frac{1}{a_2(1 + a_4 + a_3)} \right] \sqrt{a_3 \left( \frac{\omega_2}{\omega_1} \right)}$$

$$\text{where } a_1 = \frac{1}{1 + \frac{R_8}{R_6} + \frac{R_8}{R_7}}$$

$$a_2 = \frac{1}{1 + \frac{R_6}{R_7} + \frac{R_6}{R_8}}$$


$$a_3 = \frac{R_4}{R_5}$$

$$a_4 = \frac{R_4}{R_3}$$

Resistors  $R_1$  and  $R_2$  determine the natural frequency; resistors  $R_3$ ,  $R_7$  and  $R_8$  determine gain and  $Q$ . You must apply these five resistors externally to the UAF;  $R_4$ ,  $R_5$  and  $R_6$  are internal and fixed.

Gain, depending on the type of filter selected and whether it is inverted or noninverted (Fig 2), appears in Table 1. Use Table 2 for the calculation of  $R_8$  or  $R_3$  and Table 3 to calculate  $R_7$ .



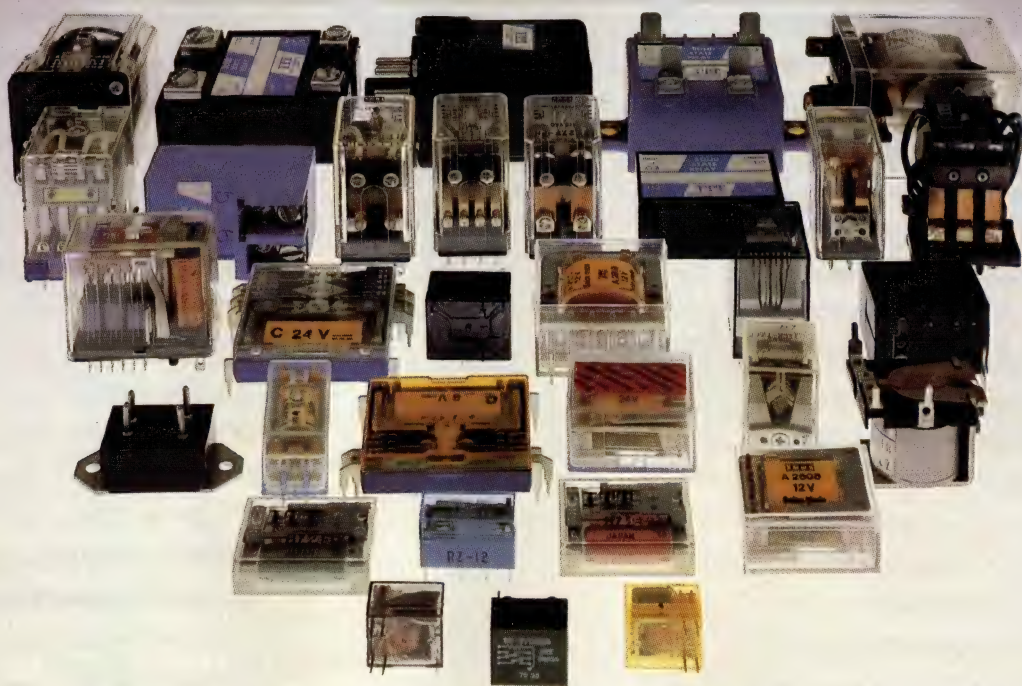

Select any of 7,000 electro-mechanical and solid state relays from the world's fastest expanding line. ITT offers 20 complete families of electro-mechanical relays, some with life expectancies of up to 200 million mechanical operations or 20 million electrical operations. There's also a wide choice of SSRs for AC switching and DC switching. For samples, illustrated catalogs, and the name of your nearest representative, call Jim Harrison, Relay Marketing Manager (617) 686-1110. Or write: ITT Components, a unit of International Telephone and Telegraph Corporation, 1551 Osgood St., North Andover, MA 01845.

Relays from **ITT** Components

Electro-mechanical relays are available with continuous ratings from  $\frac{1}{2}$  A to 15A and contact combinations ranging from 1-pole, double throw to 6-pole, double throw. SSRs for AC switching are available with photo-coupled back-to-back SCRs, or with photo-transistor or reed-relay coupling. Those for DC switching have either photo-transistor, photo-cell or reed-relay coupling.

For more information, Circle No 119



## A 4-step process defines an active filter

### A 4-step procedure

The following 4-step tuning procedure permits selection of all external resistors. It's based on first selecting an output function and configuration; if you desire gain values other than those given in **Table 1**, you can use the uncommitted operational amplifier:

- **Step 1:** Select  $f_n$  and determine the design  $Q$ . Because the maximum  $f_n Q$  product is specified on the UAF data sheet, you should calculate this product to ensure that the design will operate within the filter's limits. (In the case of the ACF7092C,  $f_n Q = 10,000$ .) The selected  $Q$  can now serve in all subsequent calculations. (Keep in mind that at this point, you can use look-up tables which specify normalized frequency  $f_n$  and desired  $Q$  for an nth-order filter to obtain a Butterworth, Chebyshev or Bessel response.)
- **Step 2:** Calculate  $R_3$  or  $R_8$  as a function of design  $Q$ , using the equations listed in **Table 2**.
- **Step 3:** Calculate  $R_1$  and  $R_2$  as a function of  $f_n$ . For the basic unity-gain configuration,  
$$R_1 = R_2 = (5.04 \times 10^7) f_n$$
- **Step 4:** Calculate  $R_7$  as a function of design  $Q$ , using the equations listed in **Table 3**.

These four steps are all that's required. If the mathematics seems a bit cumbersome, remember that any programmable calculator can make light work of the job. In fact, many manufacturers provide programs right in their data sheets for transfer-function calculations as well as programs for specific responses and low-pass-to-bandpass transformations.

### Cascade for higher orders


These design steps yield a second-order response; you can cascade several universal active filters to yield higher order functions. Many manufacturers' data sheets tell you how to design higher order filters using the basic UAF; they provide suggestions on how to design or locate the various sections to optimize performance and eliminate inter-section distortions. The data sheets provided by Burr-Brown and National prove particularly helpful in this regard and offer a great deal of design and application information as well as tuning tips. Additionally, all UAF suppliers provide application notes to aid in circuit design.

While universal active filters are extremely versatile and save design time, some responses might be difficult to realize with them. In such cases, a custom design might prove more useful and less expensive in the long run; contact manufacturers to discuss the tradeoffs involved.

EDN

Article Interest Quotient (Circle One)  
High 473 Medium 474 Low 475

## THE NEW ITT TAP-T. THE SOLID DIPPED TANTALUM CAPACITOR THAT STANDS ON ITS OWN FEET.

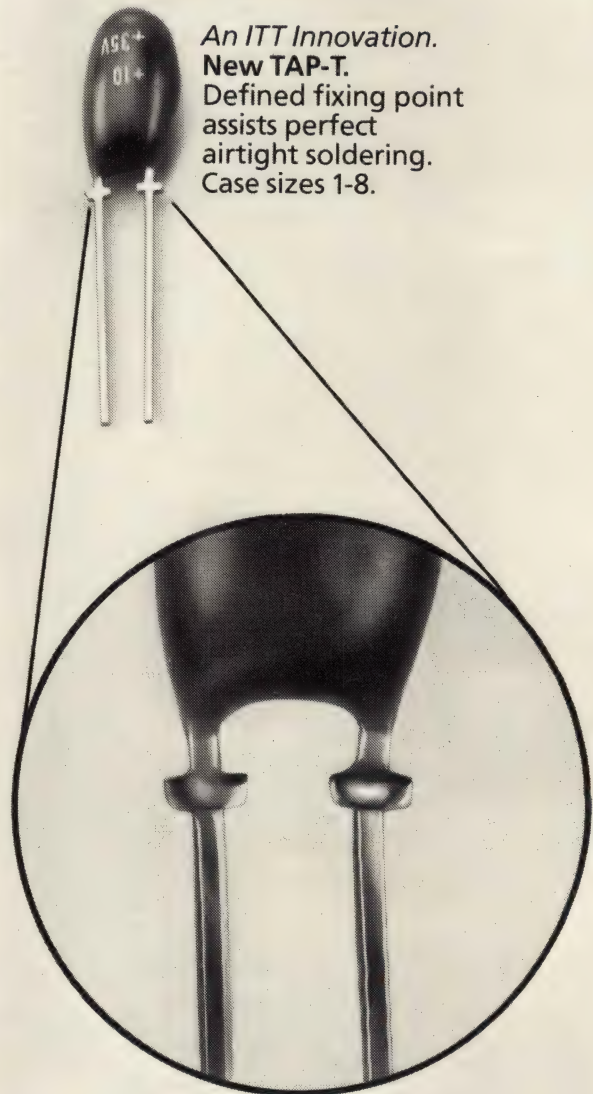


An ITT Innovation.  
**New TAP-T.**  
Defined fixing point  
assists perfect  
airtight soldering.  
Case sizes 1-8.

For samples, our new catalog, and the name of your nearest representative, call (617) 686-1110. Or write: ITT Components, a unit of International Telephone and Telegraph Corporation, 1551 Osgood St., North Andover, MA 01845.

Capacitors from **ITT** Components

For more information, Circle No 120





**Many of our  
customers  
possess unusual  
powers.**

They couldn't function without them. Take the test engineer who needs to simulate Bombay's electrical system. An Elgar AC Power Source and plug-in oscillator is all it takes. That same Elgar Power

Source can take equipment to every kind of electrical system in the world. There are 50 plug-in oscillators to choose from offering frequencies from 15 Hz to 10 KHz. Anything they can't duplicate, an Elgar programmable oscillator can. Single, two, and

three-phase outputs are available in ratings from 120 VA to 36 KVA.

If your work calls for unusual powers, come to the source. Elgar, 8225 Mercury Ct., San Diego, California 92111. In California, call (714) 565-1155. Out of state, call 800-

854-2213 toll free. (We are also a leading producer of High Isolation Transformers, AC Line Conditioners and Uninterruptible Power Systems.)

**ELGAR**

an **Onan** power systems company

For more information, Circle No 121


See us at Electro Booth #605/607





**ZEBRA<sup>®</sup> LCD CONNECTORS  
RESIST . . .**

**SHOCK**  
**and**  
**vibration!**

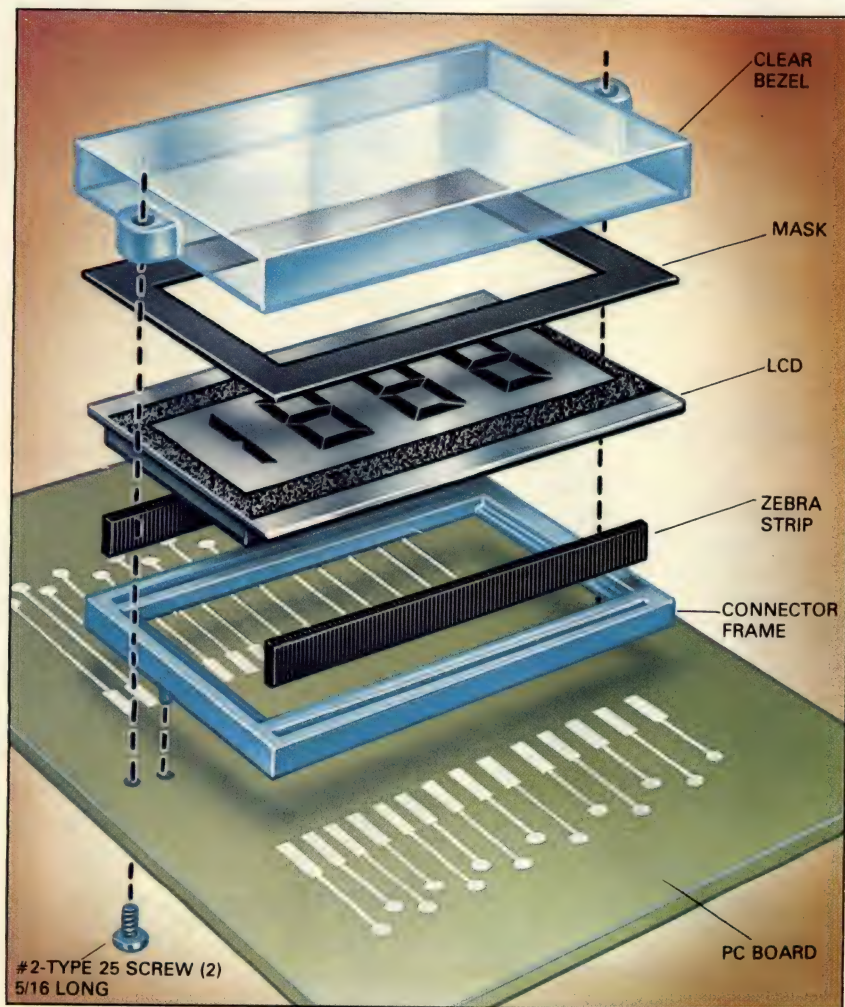

**ZEBRA'S CONDUCTIVE RUBBER PROPERTIES ARE VERSATILE IN DESIGN AND OFFER SHOCK AND VIBRATION DAMPING. SEND FOR YOUR FREE SAMPLE AND PUT ZEBRA TO THE TEST.**




129 DERMODY ST., CRANFORD, N.J. 07016 (201) 272-5500

*The Conductive People*





# Out of All the Face Wipe IC Sockets...

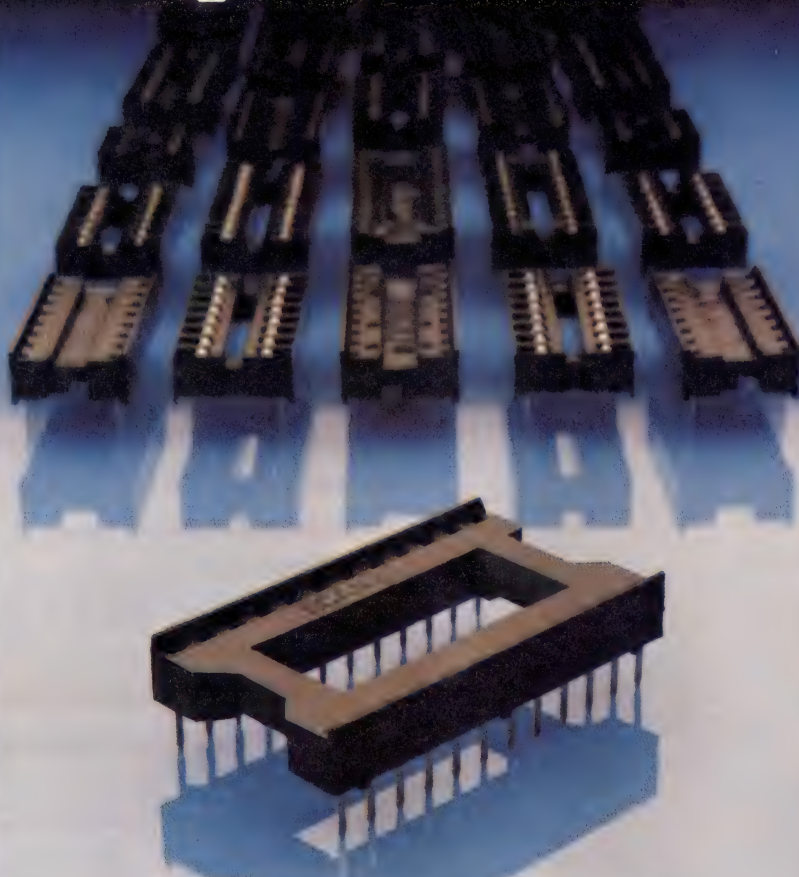

## One Stands Alone

Scanbe has gone the extra mile to bring you the 707 Series of low-cost, low profile face-wipe IC sockets. Each is precision made with the important design and reliability advantages that puts it way ahead of the competition. Just compare spec for spec and feature for feature.


Scanbe's special design ensures ideal insertion, holding and withdrawal forces—even after multiple insertions. The contacts are made of CA-725 alloy for high corrosion resistance and excellent solderability. You get your choice of gold or tin in the contact area for minimum cost yet maximum performance. The 707 Series is designed to exceed EIA RS-415 standards and to meet MIL-S-83734B. The units offer open frame construction for cooler IC operating... end and side stackability... open end design for easy and safe IC extraction.

The series is UL 94/V0 flammability rated and comes packaged in tubes compatible with automatic insertion equipment. The 707 Series is available off-the-shelf in 8 to 40-pin versions from your Scanbe distributor. For the full story on this unique socket, contact your local Scanbe distributor or the factory direct.

**Scanbe**, Division of Zero Corporation, 3445 Fletcher Ave., P.O. Box 4159, El Monte, California 91731, Telephone: (213) 579-2300, TWX: (910) 587-3437.



# Make Contact...

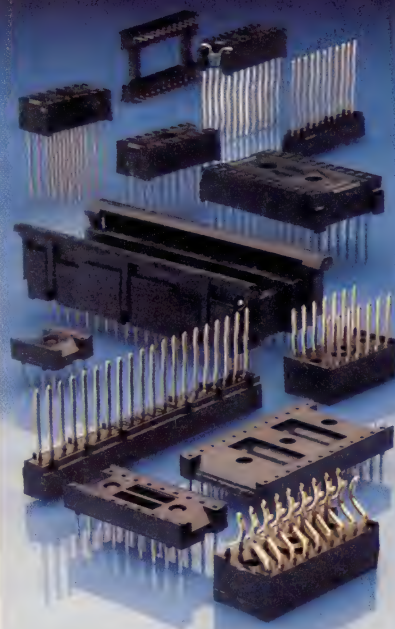

## With Scanbe's Full Line of IC Sockets

Whatever your IC socket requirement—plug into Scanbe for the best results. Every Scanbe socket exceeds EIA RS-415 standards and features built-in quality and design advantages that can improve your product's dependability and serviceability.

**707 Series** low profile face-wipe IC sockets provide unparalleled performance and reliability at a competitive price. They're available in all pin configurations with gold or tin at the contact area.

**US-2** low profile, edge-wipe IC sockets have been the industry standard for quality and are designed for maximum performance and reliability. US-2's are available in all pin configurations with or without gold inlay.

**ME-2** sockets and pin strips mate with all device lead frames. ME-2's come in a wide range of models including wire wrap sockets, solder tail sockets, discrete sockets, socket modules, pin strips, and edgeboard sockets.

**ZIF** zero insertion force IC connectors eliminate lead damage when IC's or microprocessors are inserted or removed. ZIF's are available in CA-770 with or without goldplated contacts.

For more information on any of these lines, contact your local Scanbe distributor or contact the factory direct.

**Scanbe**, Division of Zero Corporation, 3445 Fletcher Ave., P.O. Box 4159, El Monte, California 91731, Telephone: (213) 579-2300, TWX: (910) 587-3437.





# Offsetting, linearization methods improve transducer performance

*Simple offset and linearization circuits adjust and compensate for transducer operation under varied conditions—and handle low-level signals with care.*

Dan Sheingold, Analog Devices Inc

Properly applied, offsetting and linearization can boost a transducer system's noise immunity, improve measurement accuracy, extend operating-temperature ranges and reduce device sensitivity to error contributions from other components. And while the many sensor types available (EDN, March 20, pg 122) present a variety of interfacing challenges, design considerations such as those discussed in this article help meet these challenges in a straightforward manner.


## Offsetting—what and when?

Offsetting embraces the use of analog techniques to shift a signal level by a predictable amount. Typical applications include

- Measurement of small changes about a large initial value
- Incremental measurements employing a device that operates over an absolute scale (gauge vs absolute pressure, degrees Celsius vs degrees Kelvin)
- Reduction of common-mode levels
- Restoration or introduction of a beneficial offset (converting a 0 to 10V range to a 4- to 20-mA range for transmitting analog signals, for example).

An accurately developed constant (offset) isn't necessary in all applications, however. For example, an isolation amplifier allows you to measure small differential signals riding on large common-mode voltages and ignore the common-mode voltage in the process. And if the useful portion of a transducer's output is an ac signal, capacitive or transformer coupling eliminates the dc level.

For applications that do require offsetting, though, Fig 1 illustrates one method utilizing a bridge configuration—a useful technique with transducers such as thermistors, resistance temperature detectors (RTDs) and strain gauges, which don't inherently involve bridge circuits. The transducer in Fig 1 acts as

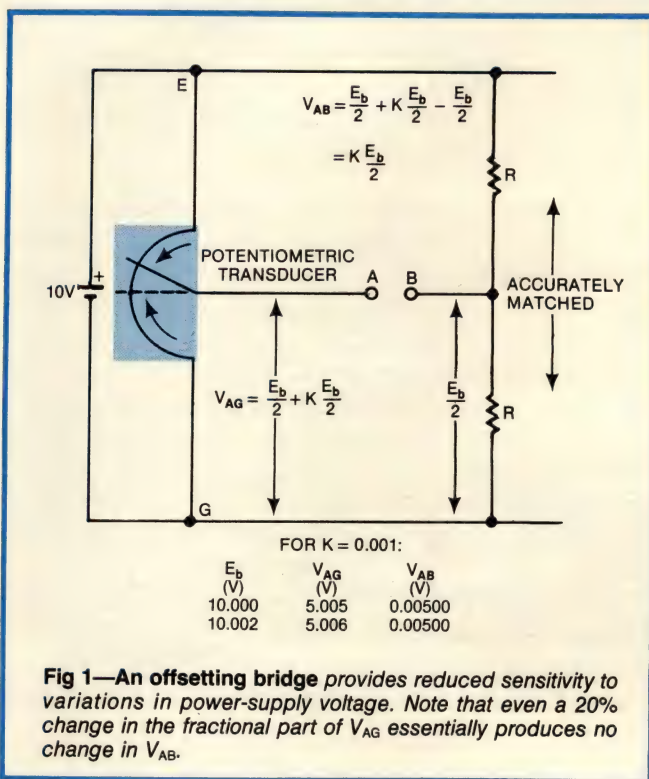

**Fig 1—An offsetting bridge** provides reduced sensitivity to variations in power-supply voltage. Note that even a 20% change in the fractional part of  $V_{AG}$  essentially produces no change in  $V_{AB}$ .

a linear voltage divider, and the variable of interest is the fractional deviation from half scale,  $KE_b/2$ . If  $E_b$  equals 10V, a deviation ( $K$ ) of 0.1% results in a 5-mV change. An accurate digital voltmeter at AG, between the potentiometer wiper and  $E_b$ 's low end, would read 5.005V, so you could read the 0.005V positive deviation by ignoring the initial digit. Unfortunately, the circuit's output is highly sensitive to error—a 0.02% error in either the power-supply voltage or the meter reading results in a 20% error in the measured value of  $KE_b/2$ .

However, by forming a bridge (employing an accurately matched resistance pair) to produce an offsetting voltage  $V_{BG}$  and placing the meter to read the circuit's difference value  $V_{AB}=0.005V$ , you cancel the effects of small changes in power-supply voltage, because both voltages experience the same amount of change. In addition, use of a low full-scale voltage range



Bridge circuits reduce transducer sensitivity to error sources

(0.1999V on a 3½-digit meter, for example) and/or preamplification of the difference voltage further improve meter accuracy.

You can also employ another less critical form of offsetting to reduce measurements from absolute to gauge or from degrees Kelvin to degrees Celsius, or to translate the outputs of high-level transducers that produce ranges inherently offset from zero. Two simple ways to accomplish these adjustments involve input summation in operational or instrumentation amps and use of an instrumentation amplifier's reference input.

Fig 2a illustrates how you can use resistance to scale the 1-μA/°K output of an AD590 temperature transducer to 1 mV/°K and insert a fixed 273.2-mV offset to provide a voltage output representing degrees Celsius. Similarly, Fig 2b shows a semiconductor pressure transducer's 2.5 to 12.5V output (representing a 0 to 100-psi range) offset to provide 0V for 0 psi.

Cold-junction compensation avoids an ice bath

A special form of offsetting, cold-junction compensation (CJC) finds use with thermocouples in applications where you expect large ambient-temperature variations and find it inconvenient to provide an ice bath for a reference junction (the vast majority of applications fall into this category). The offsetting circuit measures ambient temperature at the cold-junction reference and adds an opposite-polarity voltage to the transducer's output approximately equal to the value developed by the cold junction. The net circuit output equals the measuring junction's inherent Seebeck voltage.

The circuit shown in Fig 3 provides CJC for a Type J thermocouple (iron-constantan). (When utilizing such an approach, place the reference junction in intimate thermal contact with the temperature transducer.) The

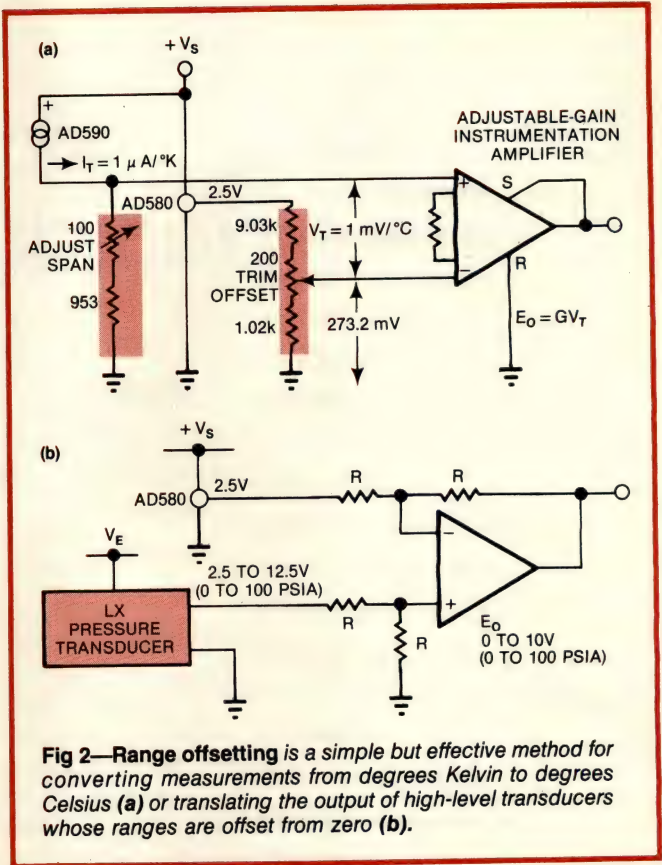


Fig 2—Range offsetting is a simple but effective method for converting measurements from degrees Kelvin to degrees Celsius (a) or translating the output of high-level transducers whose ranges are offset from zero (b).

circuit's 2.5V reference and AD590 temperature sensor add a constant term plus a term proportional to temperature; when adjusted to read the correct output voltage at a nominal reference temperature (say 25°C), the circuit offers accuracy to within about 0.5°C over an ambient range of 15 to 35°C. Principal error contributions in Fig 3's circuit arise from the temperature coefficients of the voltage reference and resistors. (Note that while the figure shows a Type J device, the circuit accommodates other thermocouple types if you substitute different values for  $R_A$  as shown in Fig 3's table.)

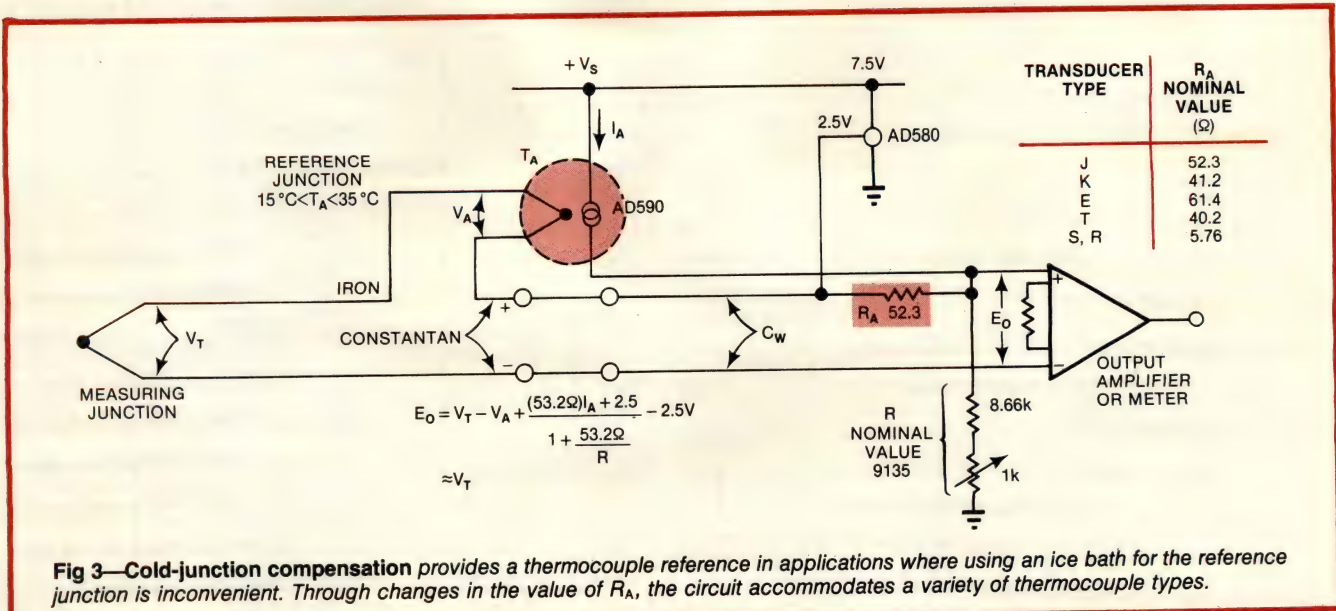


Fig 3—Cold-junction compensation provides a thermocouple reference in applications where using an ice bath for the reference junction is inconvenient. Through changes in the value of  $R_A$ , the circuit accommodates a variety of thermocouple types.



## Offsetting improves system performance

Many process-control applications transmit transducer information in current form with a full-scale span of 16 mA and an offset of 4 mA. Current transmission provides a degree of noise immunity because the received information remains unaffected by voltage drops in the power line, stray thermocouple effects, contact voltage or resistance and induced-voltage noise. At the same time, the offset provides a distinction between a ZERO (represented by 4 mA) and no information arising from an open circuit (zero current flow).

Current transmission also offers another benefit: In some applications, you can use the 4-mA current not needed for information transfer to remotely furnish power. The system then transmits power in one direction and information in the other. You thus need no local transducer power source and require only two wires for transmission.

Finally, current transmission allows you to connect several loads at various locations in series. You could, for example, use a transducer output to drive both a chart recorder and a meter and provide a controller input. Process-control current-transmission networks (Fig 4) can implement current-based systems by employing modular voltage-to-loop-current converters either sharing or isolated from system common.

The devices shown in Fig 4 provide low-cost guaranteed performance, but you can find many published circuits that allow you to implement successful voltage-to-current converters using op-amp circuitry. Just be sure, though, to consider the accuracy, grounding, input-voltage-range, output-current and compliance-voltage, power-supply, reference and dc-stability requirements.

## Classify devices according to nonlinearity

The second transducer design factor considered in this article—linearization—concerns a device's inherent performance characteristics. A linear system or element is one for which cause and effect are proportional; if there are several inputs, the system's output is proportional to their weighted sum.


Nonlinearity specs designate how much a device deviates from perfect proportionality. For some devices (such as log-antilog amplifiers), nonlinearity is a desired characteristic. For others (such as thermocouples and off-null bridges), it represents a performance limit predictable from the nature of the device's characteristics. Many devices' nonlinearity, however, differs from device to device, allowing characterization only as a worst-case specification. The linearization schemes discussed here consider only the second class (undesired but predictable) of nonlinearities.

## Digital or analog—which way to go?

If you wish to digitize data for processing at the earliest practical point in a circuit, you'll probably find it expedient to perform any necessary linearization in the digital domain. The principal digital techniques

involve ROMs and computational algorithms.

ROM provides the fastest access and proves useful in the face of limits on processing capability and time and when nonlinearity is fixed and well defined. You can hardwire the ROM to an A/D converter's output and gate this memory with the ADC's end-of-conversion flag to assure a linearized signal for further processing. Each converter output level corresponds to an address in ROM; the word stored at each address can be either the correctly linearized value of the measured variable

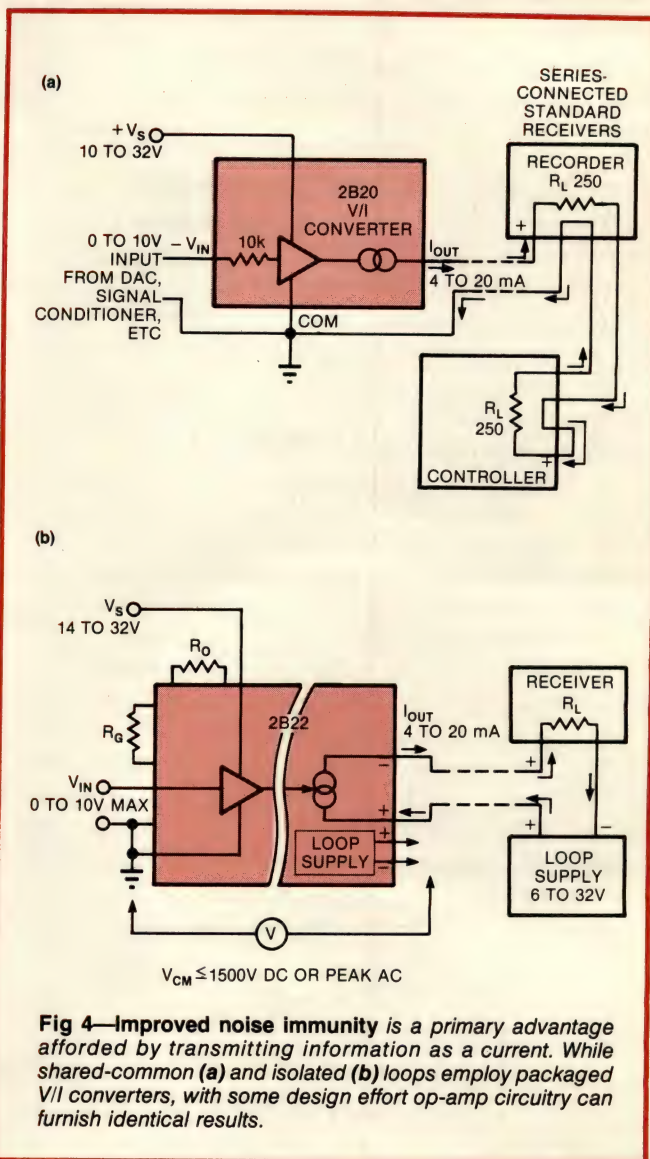

**Fig 4—Improved noise immunity** is a primary advantage afforded by transmitting information as a current. While shared-common (a) and isolated (b) loops employ packaged V/I converters, with some design effort op-amp circuitry can furnish identical results.

or an additive correction term.

If rapid mathematical capability is available, you can employ another scheme in systems that look at their nonlinear input sources infrequently and afford only limited memory capacity: Derive a mathematical function that approximates the inverse of the nonlinear relationship—or the difference between the ideal and actual signals—and store it in program memory. Then, whenever the system requires the nonlinear source's signal, the processor computes a correct value based on the signal's mathematical relationship to the measured input variable.



## Current transmission improves transducer-system noise immunity

For many applications, however, it's best to linearize transducer output at some point in the analog process. This approach obviously makes sense in systems that employ no digital processing, but it's also reasonable for applications incorporating only limited digital-processing capability and/or memory and where you can implement analog processing simply and economically. Two general avenues are available to effect analog linearization—modify the transducer itself or adjust its output signal.

### Circuit modifications work in some cases

Many methods are available to linearize a transducer's output signal by utilizing corrective circuitry. If an application involves a bridge arrangement, for example, you can provide a feedback signal to balance it and obtain an output proportional to the active element's resistance change. Alternatively, you can drive a bridge's active leg with a current derived from the voltage applied to the reference leg.

Another example of transducer circuitry modification utilizes networks employing thermistors and resistors that provide a linear output over limited ranges. Transducer manufacturers utilize this technique to provide devices with linearities to within 0.2°C over ranges such as 0 to 100°C.

By connecting resistance in series or parallel with a thermistor, you can linearize circuit output (in a rudimentary way) over limited temperature ranges. While the simple circuit shown in Fig 5 furnishes a much lower sensitivity than that of the thermistor itself—1%/°C of the applied voltage over a range of about 50°C—its output is linear to well within ±5% of the range.

The approach here starts with the relationship

$$\frac{V_{OUT}}{R_S} = \frac{V_S - V_{OUT}}{A(R_{25})}; \quad (1)$$

then,

$$\frac{V_{OUT}}{V_S} = \frac{1}{A \frac{R_{25}}{R_S} + 1} \quad (2)$$

where

$V_{OUT}$  = the resistive divider's output voltage into a high-impedance load

$V_S$  = the constant input voltage

$A$  = the ratio of thermistor resistance at any temperature ( $R_T$ ) to its resistance at 25°C ( $R_{25}$ )

$R_{25}$  = the thermistor's specified resistance at 25°C when operated at a power low enough to avoid significant dissipation

$R_S$  = the value of series compensating resistance.


With the reasonable assumption that over a limited temperature range ( $T$  denoted in degrees Kelvin):

$$A \approx \alpha e^{\beta/T} \quad (3)$$


where  $\alpha$  and  $\beta$  are unknown arbitrary constants, you can pick values of  $A$  from Fig 5's curve at two temperatures (0 and 50°C, for example) and calculate  $\alpha$  and  $\beta$  to be  $1.44 \times 10^{-6}$  and 4016°K, respectively.

Substituting values from Eq 3 into Eq 2 and differentiating with respect to temperature (utilizing various values of  $R_{25}/R_S$  in the 0 to 25°C range) shows that the derivative exhibits little change (implying linearity) at a  $R_{25}/R_S$  ratio of 0.61. One of the curves plotted in Fig 5b is based on this value, calculated for a 0 to 25°C range, while the other is based on  $R_{25} = 1.67R_S$  over a 0 to 70°C range. The respective nominal values of  $R_S$  for these ratios and with  $V_S = 5V$  and  $R_{25} = 10 k\Omega$  are 16.4 and 6 k $\Omega$ ; useful ranges would span -10 to +30°C and -5 to +70°C, with temperature sensitivities of 55 and 45 mV/°C.

As a final example of linearizing a transducer by modifying its circuitry, the circuits shown in Fig 6

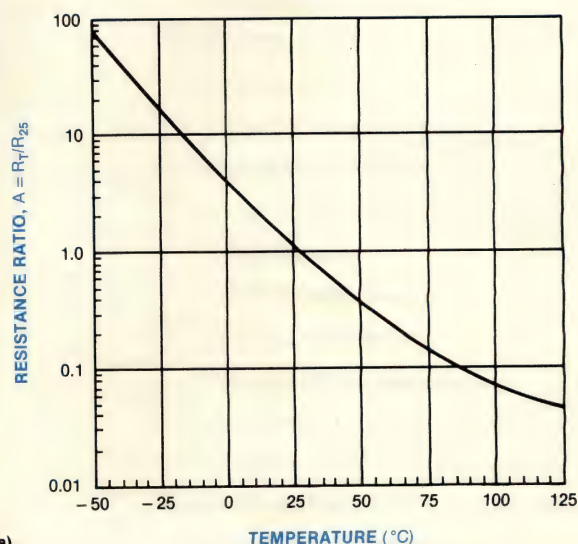

(a)


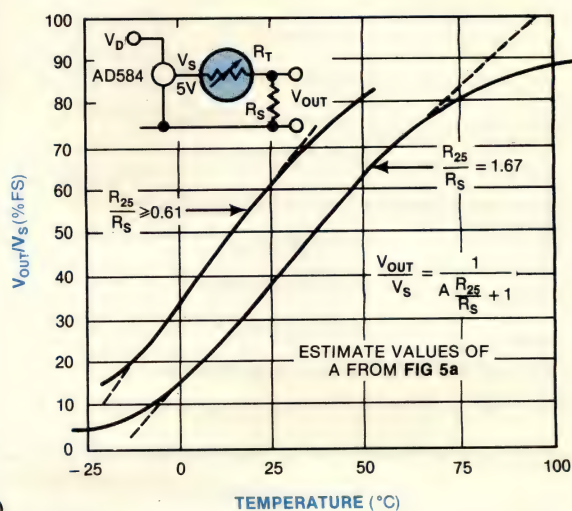


(b)

**Fig 5—Although quite sensitive to temperature, thermistors are also highly nonlinear. Connecting resistors in series or parallel with a thermistor crudely linearizes device output (a) over a limited temperature range (b).**



**Fig 6—Using feedback to affect bridge excitation (a) is a straightforward method of correcting transducer nonlinearity. The adjustment possible with the 2B31 signal conditioner (b) permits a degree of over- or undercorrection to compensate for bridge nonlinearity.**

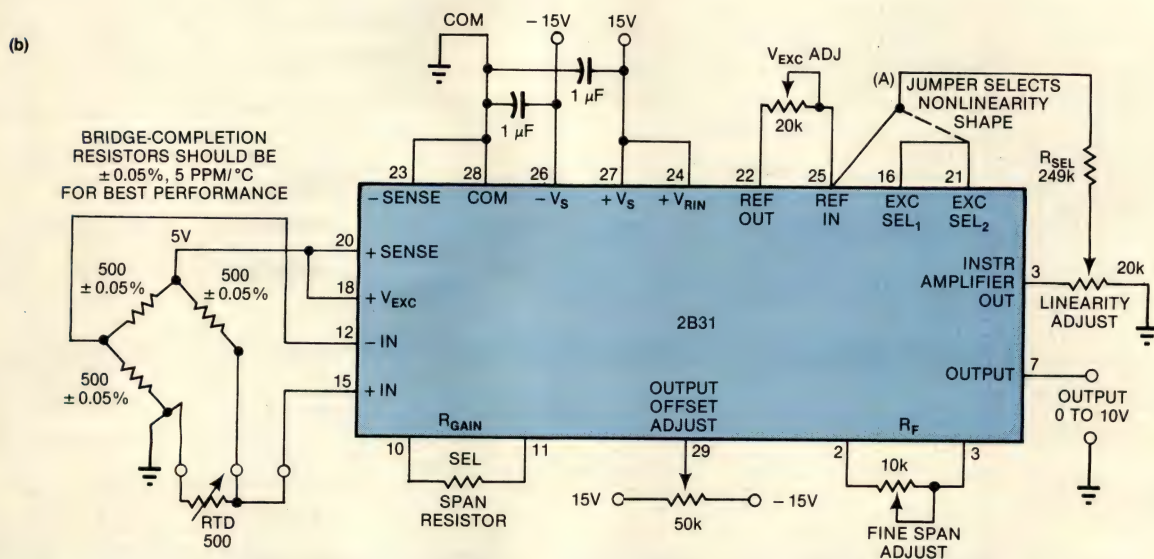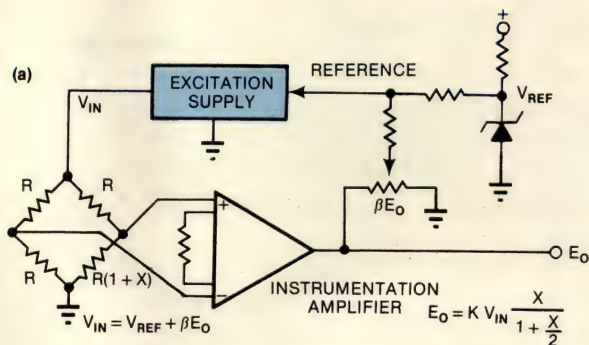

utilize the output of a bridge preamplifier to modulate a bridge's excitation. An external adjustment circuit applied to the 2B31 bridge/signal conditioner provides a degree of over- or undercorrection to partially compensate for the nonlinearity of the device (such as an RTD) as well as the bridge.

In Fig 6a's simplified circuit, amplifier output  $E_O$  depends on the fractional resistance deviation  $x$  and excitation voltage  $V_{IN}$  according to the expression

$$E_O = K V_{IN} f(x). \quad (4)$$

Feeding back a small fraction ( $\beta$ ) of the bridge's output makes  $V_{IN}$  a function of  $E_O$ :

$$V_{IN} = V_{REF} + \beta E_O; \quad (5)$$

substituting Eq 5 into Eq 4 results in

$$E_O = \frac{K V_{REF} f(x)}{1 - K \beta f(x)}. \quad (6)$$

If the bridge response is of the form  $f(x) = x/(1 + x/2)$ ,

$$E_O = \frac{K V_{REF} x}{(1 + x/2) \left( 1 - \frac{K \beta x}{1 + x/2} \right)} \\ = \frac{K V_{REF} x}{1 + x(\frac{1}{2} - K \beta)} \quad (7)$$

To cancel any nonlinearity, the denominator must equal 1, so

$$K \beta = \frac{1}{2}. \quad (8)$$

The network shown in Fig 6b applies this result to a bridge circuit in which a 2B31 signal conditioner provides excitation and amplification for an RTD (although the circuit also handles most other bridge-based sensors). Nonlinearity slope (concave upward or downward) determines the sense of the required feedback. Resistor  $R_{SEL}$  sets the magnitude of the linearity correction, and the linearity-adjust pot provides a fine trim.

If you're using an RTD, you can efficiently make the linearity adjustment without actually changing temperature by simulating the RTD with a precision decade resistance. You can adjust offset at the low end of the resistance range, fine span at about one-third of the range and linearity at a resistance corresponding to full-scale temperature. You'll probably have to perform one or two adjustment iterations, because linearity and scale-factor errors will interact.

#### Linearize the output signal instead

Where necessary, you can apply analog processing to a transducer's output signal to compensate for nonlin-



## Adding series/parallel resistance linearizes thermistor output

earity in the transducer, the associated circuitry (such as a bridge) or both. The best circuit choice among the many options available depends upon the nature of the nonlinearity involved.

One option is to employ devices that provide inherently complementary nonlinearity—circuits exhibiting a logarithmic response to compensate for exponential functions of the measured quantity, for example.

You can also use simple analog computing circuits to provide functions complementary to the known functional characteristic of the transducer circuitry. One such example is a circuit employing analog multipliers to compensate for off-null bridge nonlinearity.

Finally, analog circuitry can implement analytic or piecewise-linear approximations to compensate for nonlinearities exhibiting an arbitrary form (in thermocouples and RTDs, for example). Circuits utilizing general-purpose multiplier/dividers or op amps used as ideal diodes can also perform satisfactorily.

EDN

### Author's biography

**Dan Sheingold**, manager of technical marketing at Analog Devices Inc., Norwood, MA, has more than 20 yrs experience in the design and application of analog computing equipment, conversion products and function modules. Since joining the company in 1969, he has written and edited numerous handbooks and applications guides and edited *Analog Dialogue*, the firm's technical journal. Dan's hobbies include running, hiking and flying.




### Acknowledgement

This article is based on material contained in Chapter 5 of the *Transducer Interfacing Handbook: A Guide to Analog Signal Conditioning*, soon to be available from Analog Devices Inc.

Article Interest Quotient (Circle One)  
High 476 Medium 477 Low 478

# DON'T SOLDER IT. SANDWICH IT.

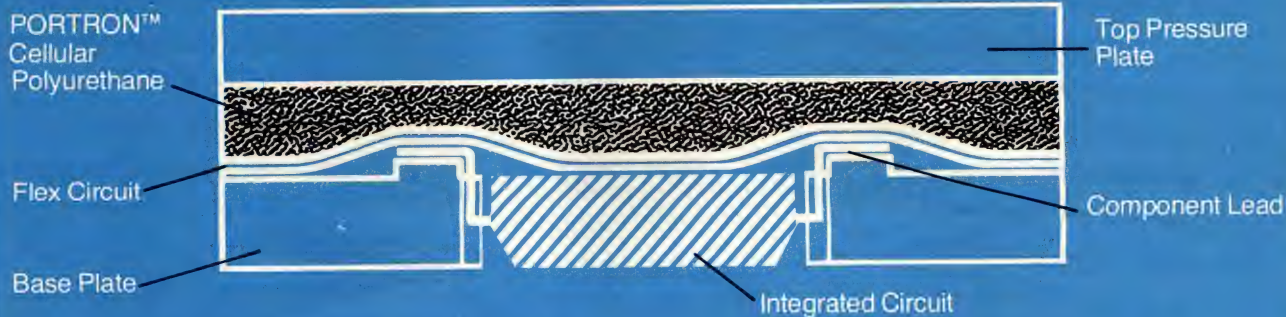

### ROGERS' SOLDERLESS SYSTEM (RSS)

Interconnects electronic components without soldering. RSS offers the reliability of gas-tight, shock and vibration resistant connections. And quick, inexpensive assembly and disassembly.

RSS, using PORTRON cellular polyurethane, can be used with any electronic or low

power electrical device with leads of any kind; or to connect jumpers between PC boards.

For a copy of the "RSS Bluebook", or more information, contact RSS product specialist.

**ROGERS**

Rogers Corporation  
East Woodstock, Ct. 06244 (203) 928-7931  
Box 700, Chandler, AZ. 85224 (602) 963-4584



# Look at the high end of TM 500.

## High performance when you need it for test and measure- ment.

When you're testing sophisticated equipment, you need high performance instrumentation to do the job right. And that's what TM 500 gives you. Consider the following:


**The PG 508.** Supremely flexible triggering plus delay, variable rise and fall, amplitude compatibility from ECL to CMOS, counted burst capability, and more.

**The FG 504.** Linear and log sweep, AM and FM, phase lock, triggering, and gating. Operates from 0.001 Hz to 40 MHz.

**The DC 508.** A frequency counter to 1 GHz with an audio frequency resolution multiplier. Plus a 9 digit readout.

**The DM 501A.** 0.05% dc accuracy. 4½ digit readout. 7 functions, including temperature and dB. True rms on ac functions.

**For immediate action, dial our toll free automatic answering service 1-800-547-1512**

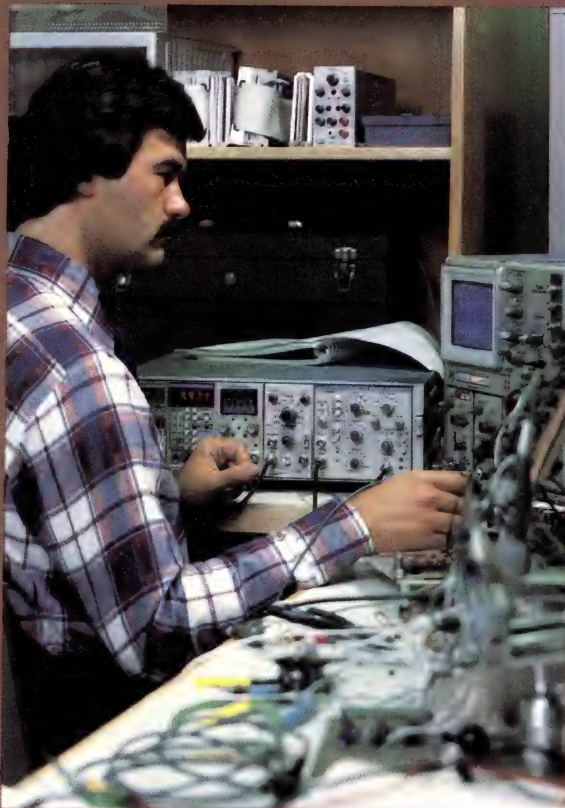

**The SG 505.** A state-of-the-art audio oscillator. 0.0008% thd from 20 Hz to 20 kHz. 10 Hz to 100 kHz overall bandwidth.

**The SC 503.** A 10 MHz scope with bistable storage. And **the SC 504.** An 80 MHz scope with true X-Y capability.

We've listed some of the top of the line here. There are over 30 additional modules currently available. All fitting into any one of six different mainframes. In whatever combination you desire.

To find out more about TM 500, contact your local Tektronix Field Office, or write Tektronix, Inc.

## TM 500 Designed for Configurability

**Tektronix®**  
COMMITTED TO EXCELLENCE

Tektronix, Inc.  
P.O. Box 1700  
Beaverton, Oregon 97075  
(503) 644-0161  
Telex: 910-467-8708  
Cable: TEKTRONIX

Europe, Africa,  
Middle East:  
Tektronix Int'l., Inc.  
Postbox 827  
1180 AV Amstelveen  
The Netherlands





# Whatever you need in an IC socket... **RN has 'em all!**

—and with “side wipe” reliability

## PRODUCTION SOCKETS

## BURN-IN, TEST SOCKETS

### NEW! ICL Series

26% lower profile—.150"  
Ideal for high density, high  
volume configurations,  
provides maximum vibration  
resistance. Solder type, single leaf  
“side-wipe” contacts. 8 to 40 contacts.

**ICN Series** high reliability general-  
purpose sockets. Low insertion  
force allows automatic IC insertion.  
In solder or wire-wrap. 6 to 64  
contacts. Dual leaf  
“side-wipe” contacts.

### ICA Series

high reliability pin  
socket contacts. Low  
profile in solder  
or wire-wrap.  
8 to 40 contacts.

**WRITE TODAY**  
for latest R-N “Short Form” Catalog...

RN HIGH RELIABILITY eliminates  
trouble. “Side-wipe” contacts make  
100% greater surface contact with the  
wide, flat sides of your IC leads for  
positive electrical connection.

### TS Series

very long contact  
life. Very low insertion  
force. Ideal for in-  
coming inspection. With  
14 to 40 contacts. Also  
strip sockets up to  
21 positions.

### IC Series

moderate cost, long life.  
Designed for general test and  
burn-in up to 350°C.  
With 14 to 40  
contacts.

### ICN/S2 Series

lowest cost burn-in  
socket available.  
Designed to accept IC  
extraction tool. With 8 to 40  
contacts, with strip sockets  
up to 25 positions.



... of R-N production DIP sockets. Contains  
full specs, dimensions and material data.  
Get yours now.

# **RN ROBINSON NUGENT, INC.**

ROBINSON-NUGENT, INC. • 800 East Eighth Street • New Albany, Indiana 47150 • Phone: (812) 945-0211

For more information, Circle No 125



# Active Filters

## Frequency Selection Where You Need It



Frequency Devices offers expanding families of over 100,000 unique active filters. These filters are designed to meet the broadest possible range of application requirements.

- Fixed, tuneable and programmable frequencies
- Lowpass, Highpass, Bandpass and Band Reject transfer functions
- 2, 4, 6, 8, and 10-Pole designs
- Tchebyscheff, Elliptic, Butterworth and Bessel characteristics

- Passbands from DC to 1 MHz
- Corner frequencies from 0.001 Hz to 50 KHz

For special needs Frequency Devices manufactures a host of application-specific active filters.

- EEG, EKG and EMG for biomedical work
- C-Message, Phosphometric, FSK, CCITT and PCM for tele- and data communications applications
- Anti-Aliasing for A/D conversion

- ANSI 1/Nth Octave for broadcasting, aircraft vibration and OSHA noise standards
- Filters for elimination of powerline interference and harmonics
- Filters for tone control, demodulation, comb filtering, phase lock control and many more.

Frequency Devices designs, manufactures, and delivers active filters to industrial, federal or military specification.




25 Locust Street, Haverhill, MA 01830  
Tel: 617-374-0761 TWX: 710-347-0314




If you need  
**top-quality**  
**panel**  
**instruments**  
 with a clean,  
 modern look...

Buy  
**Triplett's**  
 Series GL  
 or GL/B

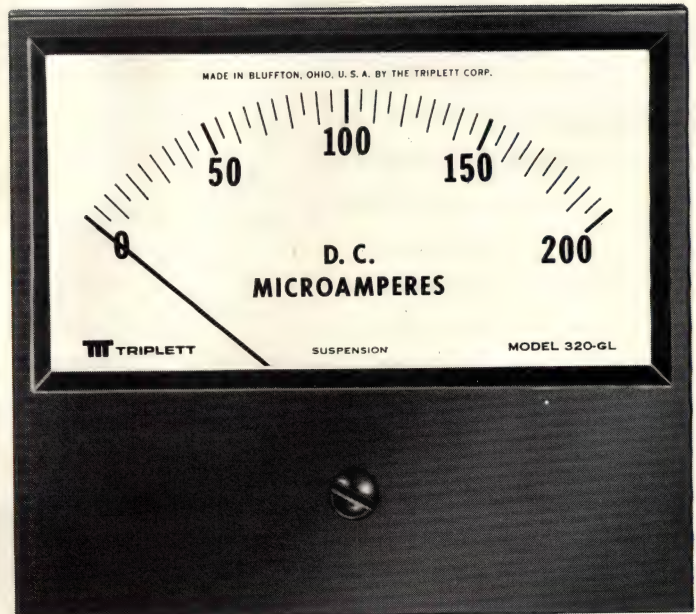

GL

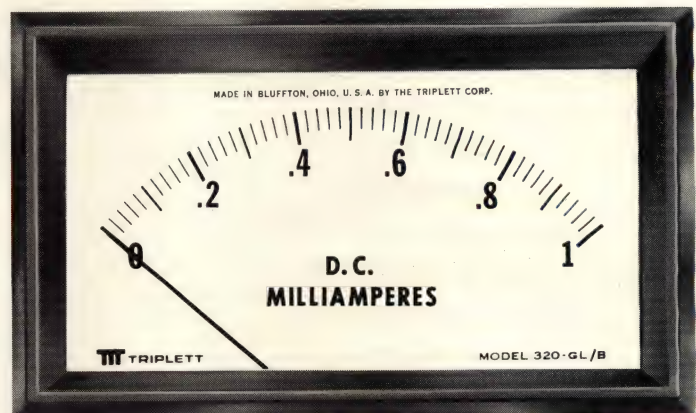

GL/B (mounted appearance)

Triplet's newest panel instruments, the Series GL and GL/B, feature glass windows, matte-finish phenolic cases and a dial design that can readily accommodate multiple scales. They are available in 3½", 4½" and 5½" sizes.

The GL Series features a standard 2-stud mount with 3- and 4-stud mounts available.

The feature of the GL/B Series is behind-the-panel mounting with a bezel which is an integral part of the case.

There's a choice of more than 275 stock sizes and ranges — in DC microammeters, milliammeters, ammeters, millivoltmeters and voltmeters; AC milliammeters, ammeters, and voltmeters; RF thermoammeters; dB meters and VU meters. For those who need special instruments . . . custom dials, pointers, scales, accuracy, tracking, resistance, response time or practically any combination of unusual specs can be put into these new cases. For quick, dependable delivery

of small quantities of these adaptable new instruments, contact your Triplet Sales/Service/Modification Center or distributor. For prototypes or production quantities, contact your Triplet representative. Triplet Corporation, Bluffton, Ohio 45817.

**TRIPLET**  
 BLUFFTON, OHIO 45817  
 Manufacturers of the World's  
 most complete line of V-O-M's

Circle 28 for free demonstration  
 Circle 29 for more information



# Increase Z8000 power with floating-point routines

*A unified set of floating-point subroutines in 32-bit binary format provides the Z8000 with fast arithmetic operations having up to 7-digit precision.*

**Robert Grappel**, Consultant,  
and **Jack Hemenway**, Consulting Editor

As powerful as today's 16-bit  $\mu$ Ps are in the sense of providing a full complement of arithmetic operations on 16- and 32-bit operands, they still lack one important feature: floating-point arithmetic. This capability proves essential, though, when working both with extremely large or small values and with fractions. Minicomputers and mainframes provide floating-point instructions as part of their hardware, but currently available 16-bit  $\mu$ Ps must employ software to perform these functions. This article presents such software for the Z8000.

## Four components form a floating-point value

While an integer consists only of a sign and a value, a floating-point number must also include information about the position of its decimal point. This decimal-point information, termed an exponent, is itself an integer; the floating-point number's value part is termed its mantissa and is also an integer. Hence, you can treat a floating-point number as an integer pair, comprising two values and two signs.

A few examples from base-10 arithmetic help clarify these ideas. The number 100 could be expressed in floating-point notation as 1.E+2. The number sign is plus (implied), the mantissa value is 1, the exponent sign is plus and the exponent value is 2. Similarly, -0.12345 might also be expressed as -12345.E-5. Here, the number sign is minus, the mantissa value is 12345, the exponent sign is minus and the exponent value is 5.

You can express any number in this manner. And because the 16-bit  $\mu$ Ps can manipulate signs and integer values, they can manipulate such floating-point numbers by properly operating on those numbers' four components.


## Floating point calls for tradeoffs

This particular floating-point representation is only

one of many, each with its advantages and drawbacks. The mathematical capabilities of the particular computer employed affect the design of a floating-point format for that computer; the demands of the computations envisioned also affect format choice. The task calls for four basic decisions.

- First comes the choice of the representation's size. The 16-bit  $\mu$ Ps manipulate 16-bit words and can also handle 32-bit double words, so it proves convenient to use one of these word lengths for a floating-point representation. But single 16-bit words don't provide enough space for all four floating-point components; the smallest workable representation is thus 32 bits—the one used here. The drawback of such a 32-bit representation is that it limits mathematical accuracy; large computers employ 64-bit and larger representations to gain that advantage.

- Second comes the choice of the exponent format. Because the 16-bit  $\mu$ Ps readily manipulate byte values, an 8-bit representation appears optimal; allowing for a sign bit, this format permits exponents ranging from -127 to +127. However, because it's convenient to employ the first bit of a floating-point value for representing the mantissa sign (permitting easy checking of that sign with Test instructions), the representation described here employs the remaining

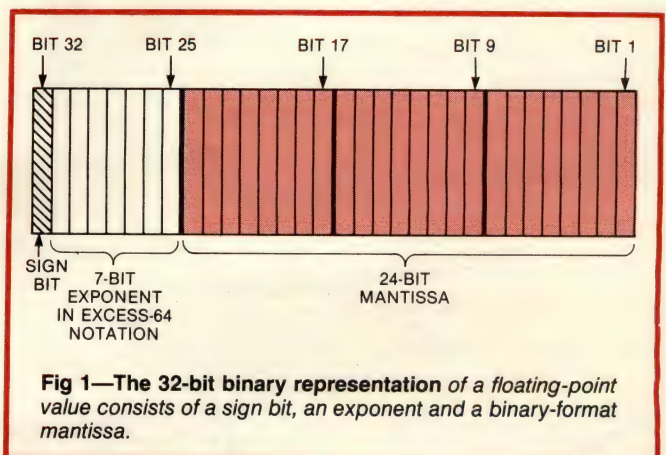

**Fig 1—The 32-bit binary representation of a floating-point value consists of a sign bit, an exponent and a binary-format mantissa.**



## 16-bit $\mu$ Ps require software for floating-point operations

seven bits of the first byte as the exponent. This approach still allows an exponent range of  $\pm 63$ —adequate for most problems not involving extremely large or small numbers.

Note, however, that the 16-bit  $\mu$ Ps don't readily manipulate 7-bit signed values—a shortcoming dealt with by the use of excess-64 notation. In essence, this technique adds the actual value of an exponent ( $-64$  to  $+63$ ) to 64; the sum then represents the exponent—and it's a positive 7-bit value for all exponents, efficiently operated on by a 16-bit  $\mu$ P as an unsigned byte.

- The third decision required in constructing a floating-point representation centers on representing the mantissa's sign. As noted, this is the representation's high-order bit; to maintain consistency with the  $\mu$ P instructions, plus denotes a ZERO and minus a ONE.

- Fourth, the mantissa of the floating-point number occupies the remaining 24 bits; representing it calls for several additional choices. Specifically, the mantissa

could be a binary value, or it could be encoded in BCD format; the latter stores six decimal digits in 24 bits, while the former handles nearly seven digits in the 24-bit space. Performing BCD arithmetic is somewhat clumsy with 16-bit  $\mu$ Ps, while binary arithmetic is their forté. But the BCD format makes conversion routines to and from ASCII simpler, while the binary format makes the conversions required for floating-point I/O more complex. However, because I/O speed is usually restricted by the I/O device and not the  $\mu$ P, the extra processing required for binary conversions is not a major drawback to the binary representation. Hence, the floating-point implementation employed here utilizes the binary format (Fig 1).

### Hold that precision

Conserving the hard-won bits of precision provided by a floating-point representation involves always normalizing the mantissa, i.e., shifting it so that its high-order ONE aligns with the representation's 24th bit. Bit 24 is always a ONE in a normalized format, and some floating-point implementations gain an extra bit of precision by simply assuming that fact and shifting in one more bit to realize an effective 25th bit. However, this representation avoids such an approach in the

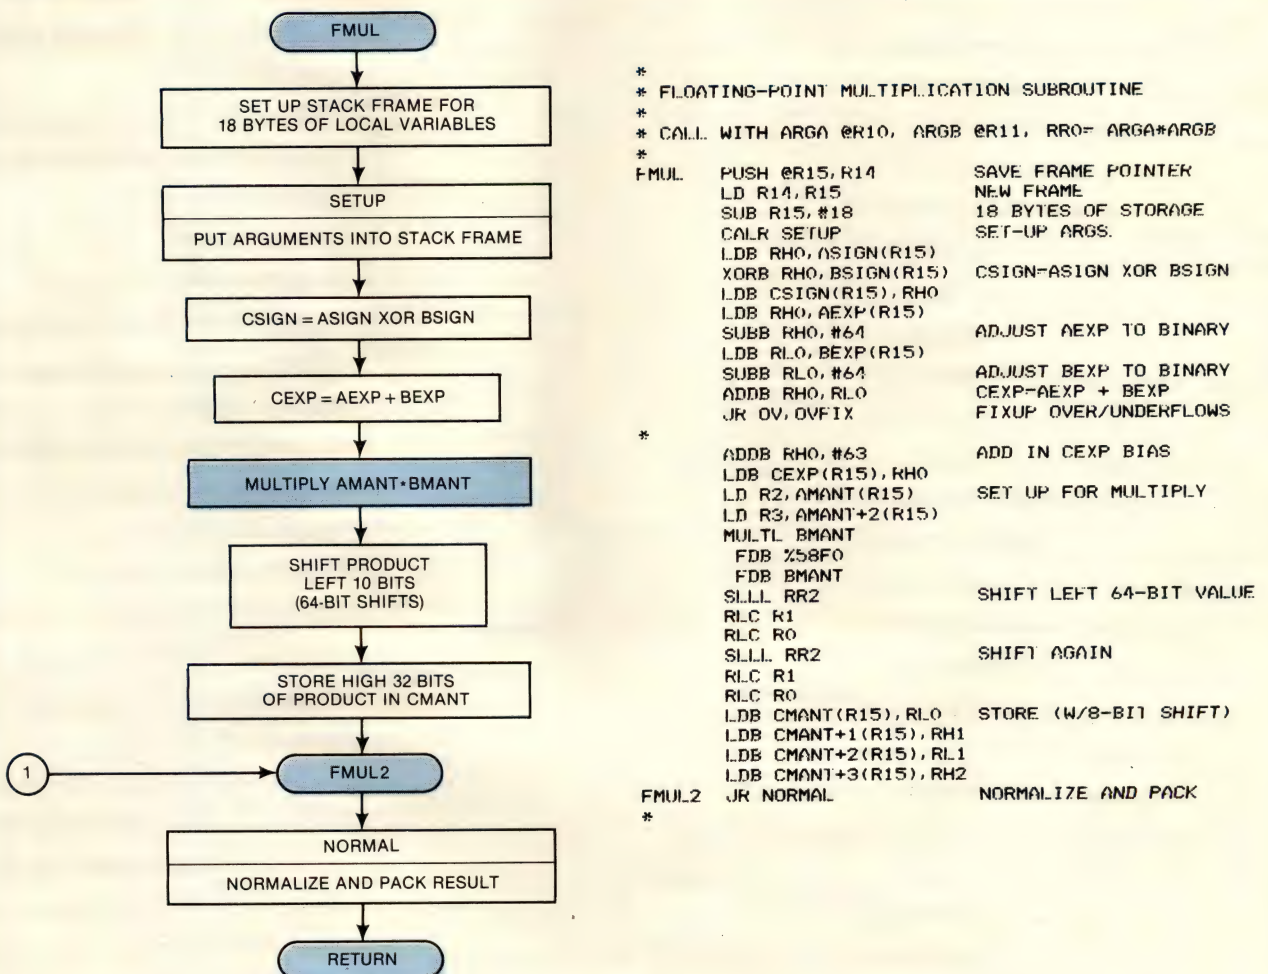


Fig 2—The FMUL subroutine performs floating-point multiplication of two 32-bit arguments.



```

*
* STORAGE FOR TWO ARGUMENTS AND RESULT
*
ASIGN EQU 0          FIRST ARGUMENT
AEXP  EQU 1
AMANT EQU 2
*
BSIGN EQU 6          SECOND ARGUMENT
BEXP  EQU 7
BMANT EQU 8
*
CSIGN EQU 12         RESULT C-A (OP) B
CEXP  EQU 13
CMANT EQU 14
*
*
* SET UP FOR BINARY FUNCTIONS
* R10 POINTS TO FIRST ARG., R11 POINTS TO SECOND
*
SETUP  LDB RHO,@R10
        ANDB RHO,#%80          GET SIGN ("ARGA")
        LDB ASIGN+2(R15),RHO
        LD R0,@R10
        ANDB RHO,#%7F          GET EXPONENT
        LDB AEXP+2(R15),RHO
        CLRB RHO
        LD AMANT+2(R15),R0      GET MANTISSA
        LD R0,2(R10)           GET MANTISSA (WORD 2)
        LD AMANT+4(R15),R0
*
SETUP2 LDB RHO,@R11
        ANDB RHO,#%80          GET SIGN ("ARGB")
        LDB BSIGN+2(R15),RHO
        LD R0,@R11
        ANDB RHO,#%7F          GET EXPONENT
        LDB BEXP+2(R15),RHO
        CLRB RHO
        LD BMANT+2(R15),R0      GET MANTISSA
        LD R0,2(R11)           GET MANTISSA (WORD 2)
        LD BMANT+4(R15),R0
        RET
*

```

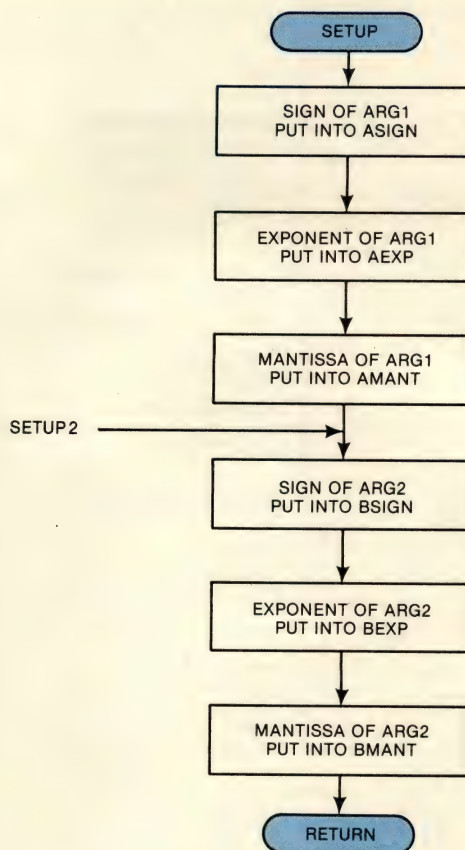


Fig 3—SETUP breaks apart the floating-point arguments and stores them on the stack frame.

interests of simplicity and speed; here, the assumed decimal point lies to the right of the number's high-order bit.

One last choice is required in a floating-point representation—the exponent base. Most floating-point representations employ base 2 or base 16; the choice affects the size of the exponents you can represent. In base 2, the 7-bit excess-64 exponent format only allows numbers up to  $2^{63}$  (approximately  $1.E+20$ ), while base 16 permits numbers up to  $16^{63}$  (about  $1.E+75$ ).

On the debit side, normalization of a base-16 representation shifts the mantissa four bits at a time because four bits represent one base-16 digit. The mantissa representation of a base-16 number can thus contain as many as three leading zeros—lost bits of precision that don't occur in a base-2 representation. Furthermore, base-2 normalization is simpler to implement on a 16-bit  $\mu P$ , and it executes more quickly. The bottom line? The implementation shown here employs base 2.

Illustrating the foregoing considerations with some examples helps clarify them. In this article's floating-point representation, 1.0 becomes  $40800000_H$  or  $01000000100000000000000000000000$ . (The sign bit is zero; the excess-64 exponent is 64—representing 2 raised to the zeroth power; the mantissa is just the high-order 1.) Similarly,  $C0800000_H$  is  $-1$ ,  $41C00000_H$  is 3.0 and  $BD800000_H$  equals  $-0.125$ . The maximum value

possible in this format is  $7FFFFFFF_H$ ; zero is  $40000000_H$ .

### Implementing re-entrant floating-point subroutines

With a floating-point representation chosen, the task of actually writing the arithmetic subroutines for it can begin. Ideally, these subroutines should be interruptible and re-entrant so that many programs can use them simultaneously. Modern 16-bit  $\mu P$ s provide sufficient power to make writing re-entrant code relatively painless; the main idea centers on storing all necessary local variables on the stack so that each program using the subroutines can have its own copy. This approach also makes the subroutines ROMable—another desirable feature.

Handling variable storage on the stack calls for two pointers. One, obviously, is the stack pointer itself, which provides the offsets by which the subroutine variables get accessed. The second pointer aids in removal of the local variables from the stack when the subroutine returns; this frame pointer holds the stack-pointer value required to return from the subroutine.

Calling a re-entrant subroutine involves first pushing the value of the frame pointer onto the stack, then placing the current stack-pointer value in the frame pointer. Next, you adjust the stack pointer to allow storage for the local variables used in the subroutine.



## Base-2 representations provide increased precision

Returning from the subroutine reverses the process. This mechanism automatically allocates and deallocates stack space for variables, and each subroutine call allocates a distinct set of variables.

### A practical implementation on the Z8002 $\mu$ P

To put the foregoing theory into practice, consider the task of multiplying two floating-point numbers. The product's sign is the exclusive OR of the signs of the

multiplier and the multiplicand, and its exponent is the sum of the exponents of those quantities. Furthermore, the product's mantissa is the normalized product of the multiplier and multiplicand. You can see that the algorithm is simple to describe, and the power of the Z8002 instruction set makes it simple to program.

The subroutine FMUL (Fig 2) starts by setting up the stack and frame pointers. ( $R_{15}$  is the stack pointer on the Z8002, and  $R_{14}$  is the register chosen here as the frame pointer.) Eighteen bytes are allocated for local variables.

The subroutine SETUP (Fig 3) transfers the multiplier and multiplicand to the local variables. It takes the first argument (multiplicand), pointed to by

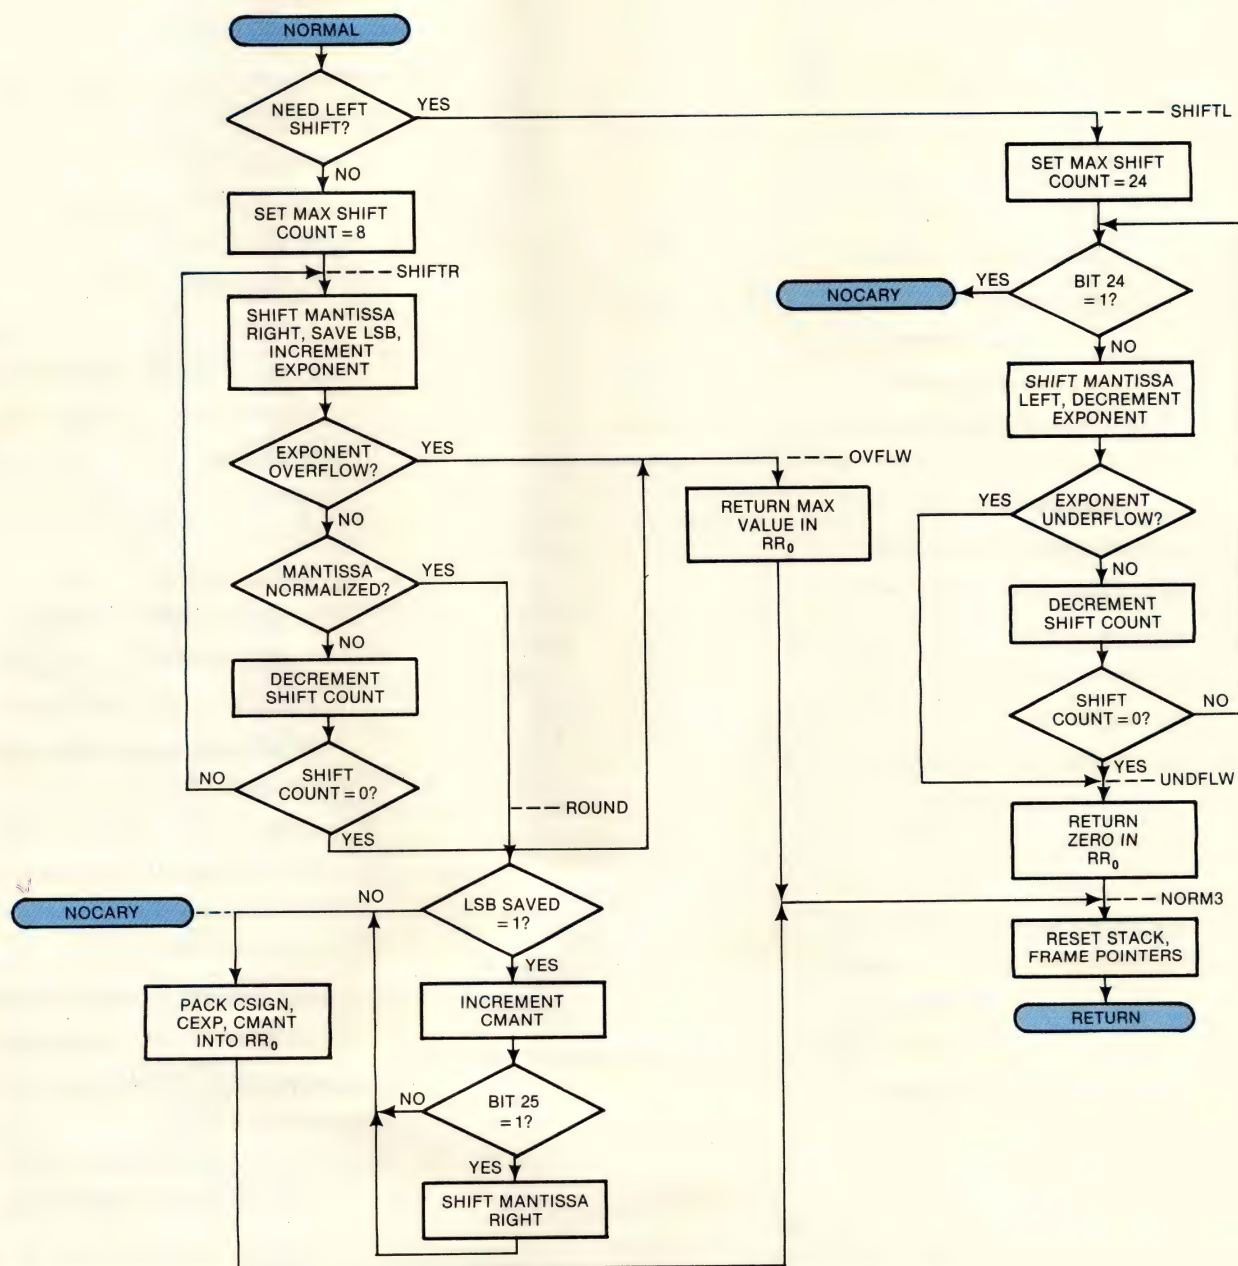


Fig 4—The NORMAL subroutine finishes the floating-point processing by normalizing the result and packing it into  $RR_0$ .



the register  $R_{10}$ , and moves that argument's sign to ASIGN, its exponent to AEXP and its mantissa to AMANT. The second argument (multiplier), pointed to by  $R_{11}$ , is moved to BSIGN, BEXP and BMANT. CSIGN, CEXP and CMANT provide space for the product that FMUL generates. Note that ASIGN, AEXP and the rest are merely offsets from the stack pointer, not memory addresses.

SETUP expands a floating-point value to six bytes: one for the sign, one for the exponent and four for the mantissa. Note that this routine employs an additional 2-byte offset to allow for the subroutine return on the stack formed when SETUP is called.

As FMUL executes, CSIGN is set to the exclusive

OR of ASIGN and BSIGN; CEXP, to the sum of AEXP and BEXP. The excess-64 notation requires some juggling to avoid byte overflow in the addition; if such an overflow occurs (i.e., the product is too big to represent), FMUL returns the largest possible value. (The routine handles underflow by returning the smallest possible value.)

The Z8002 can multiply two 32-bit values to form a 64-bit product. Here, register quad  $RQ_0$  (composed of  $R_0$ ,  $R_1$ ,  $R_2$  and  $R_3$ ) contains the product of AMANT and BMANT. Because the mantissas are each actually only 24 bits long, the product contains only 48 bits, of which FMUL requires the high-order 24. A 9-bit left shift of  $RQ_0$  moves these bits into the proper position—the low-order 24 bits of register pair  $RR_0$ . Performing 10 shifts gains an extra bit of precision, used in the normalization process.

### Normalization completes the task

The NORMAL subroutine (Fig 4) finishes processing the floating-point subroutines. It combines the sign in CSIGN, the exponent in CEXP and the mantissa in CMANT into a floating-point number in  $RR_0$ . CMANT must be normalized so that its highest order ONE is in bit position 24—a process that also changes the exponent value.

NORMAL therefore checks the high-order byte of CMANT for any ONEs. If any are there, CMANT must be shifted right; if all eight high-order bits are ZEROs, left shifting is required.

Right-shift normalization might require as many as eight shifts. Because a right shift is equivalent to a division by two, the routine increments the exponent for each shift in order to compensate. It performs right shifts until bit 24 becomes a ONE or eight shifts have occurred—the latter limitation necessary because the mantissa could be a ZERO. (A zero mantissa can be shifted forever without making bit 24 a ONE.) A check for exponent overflow also occurs each time the exponent is incremented.

Right shifts result in a loss of mantissa bits from the right end of the register pair—an inevitable occurrence because the format allocates only 24 bits for the mantissa. However, the last bit shifted out can be saved and employed to round off the 24-bit mantissa—a technique that saves one more hard-won bit of precision.

If the last bit shifted out in a right shift is a ZERO, it's ignored; if a ONE, the 24-bit mantissa is incremented. (Effectively, this procedure constitutes a round-up operation.) This increment might cause a propagation of a ONE into bit 25, in which case one further right shift is required to normalize the mantissa.

Left-shift normalization occurs at SHIFTL; this process might call for as many as 24 shifts. But these shifts cause no loss of significant bits, so no rounding is required, in contrast to right shifts. Left shifts are multiplications by two, so the exponent is decremented for each shift in order to compensate. The routine,

```
*
* NORMALIZE AND PACK RESULT INTO RR0
*
NORMAL LD R0, CMANT(R15)      MANTISSA INTO RR0
      LD R1, CMANT+2(R15)
NORM2  LDB RL6, CEXP(R15)      EXPONENT INTO RL6
      TESTB RH0                CHECK SHIFT DIRECTION
      JR Z, SHIFTL             SHIFT LEFT?

*
* SHIFT RIGHT NORMALIZE--SAVE CARRY FOR ROUNDING
*
      LDB RH6, #8              AT MOST 8 SHIFTS
*
SHFTR  SRL R0, RH6              SHIFT MANTISSA
      RRCB RH7                 SAVE CARRY BIT
      INCB RL6                  BUMP EXPONENT
      JR MI, OVFLW             CHECK FOR OVERFLOW
*
      TESTB RH0                DONE YET?
      JR Z, ROUND              YES, ROUND IT
*
      DBUNZ RH6, SHFTR         NO, LOOP UNTIL DONE
*
* EXPONENT OVERFLOW--RETURN MAX. VALUE
*
OVFLW  LD R0, #X7FFF
      LD R1, #XFFFF
      ORB RH0, CSIGN(R15)      MERGE IN SIGN
      JR NORM3                 FINISH UP
*
* ROUND OFF VALUE USING CARRY STATE
*
ROUND  TESTB RH7               CARRY SET IN SHIFT?
      JR PL, NOCARY            NO
*
      CLR R2
      ADD R1, #1               YES, ROUND UP
      ADC R0, R2
      TESTB RH0                CARRY OUT?
      JR Z, NOCARY            NO
*
      SRL R0                   YES, SHIFT AGAIN
*
NOCARY ORB RH0, RL6             MERGE IN EXPONENT
      ORB RH0, CSIGN(R15)      MERGE IN SIGN
NORM3  LD R15, R14             RECOVER STORAGE FRAME
      POP R14, @R15            RESTORE FRAME POINTER
      RET
*
* LEFT SHIFT NORMALIZATION HERE
*
SHIFTL LDB RH6, #24            AT MOST 24 SHIFTS
*
SHFTL1 TESTB RL0               CHECK FOR DONE
      JR MI, NOCARY            YES, FINISH UP
*
      SRL R0                   SHIFT MANTISSA
      DECB RL6                  DECREMENT EXPONENT
      JR MI, UNDFLW           CHECK FOR UNDERFLOW
*
      DBUNZ RH6, SHFTL1        LOOP UNTIL DONE
*
* UNDERFLOW CONDITION--RETURN ZERO
*
UNDFLW LD R0, #X1000
      CLR R1
      JR NORM3                 FINISH UP
```



## Floating-point add proves more difficult than multiplication

however, must check for underflow of the exponent. After normalization, processing goes to NOCARY.

At label NOCARY, the subroutine merges the sign, exponent and normalized mantissa into a single 32-bit value in  $RR_0$ . It then restores the stack and frame pointers and returns.

### Floating-point addition on the Z8002

Floating-point addition proves more complex to implement than multiplication. FADD (Fig 5) starts like FMUL, with setup of the two arguments and the frame and stack pointers. Then, if the first argument is negative, its mantissa AMANT is negated (two's complement). Similarly, if the second argument is negative, BMANT is negated. It might seem that the

two mantissas could then merely be added, but recall that they are both normalized. The sum of  $1.E+2$  and  $2.E+1$  can't be directly formed; the numbers must have the same exponent before you can add their mantissas.

Note, though, that forming the sum of  $10.E+1$  and  $2.E+1$  is easy—it's  $12.E+1$ . To this end, FADD must determine which argument to scale; it chooses the smaller one to preserve as much precision as possible. But also note that if one argument is much bigger than the other in magnitude, scaling the smaller argument in this manner might not serve any purpose. Specifically, if the exponent of the larger argument is more than 24 greater than that of the smaller one, scaling the smaller argument proves unnecessary—the routine need merely return the larger argument. (Shifting the smaller argument more than 24 bits leaves it all ZEROs.)

Thus, adding two floating-point numbers calls for considering four cases: The first argument could be much bigger than the second; the converse could be true; the first argument should be scaled; the second

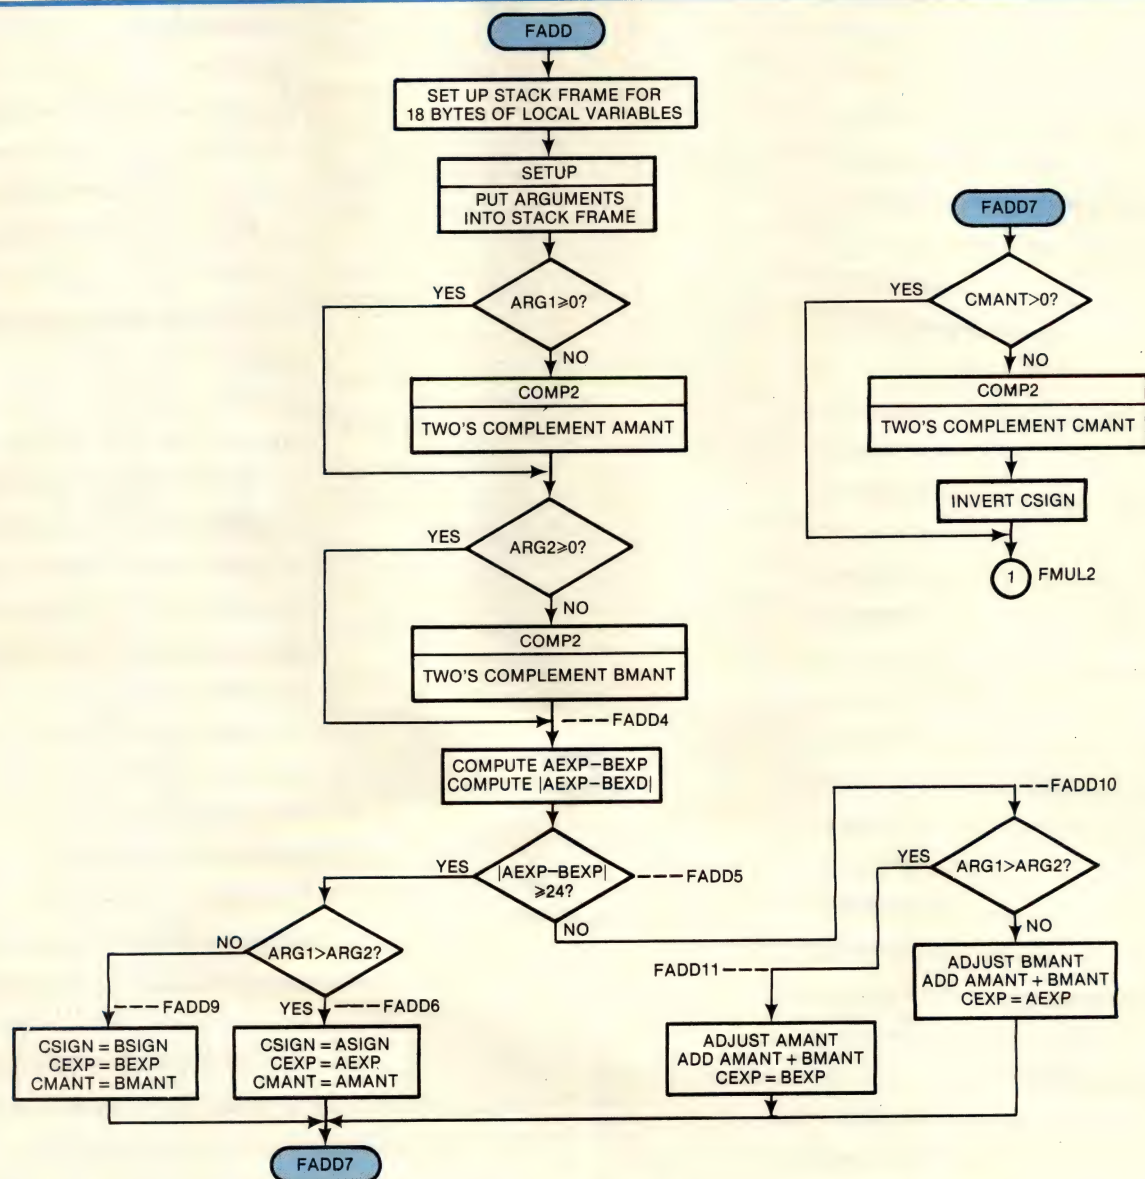


Fig 5—FADD performs floating-point addition of two 32-bit arguments.



should be scaled.

At FADD4, the routine computes the required scaling; FADD5 checks to see that scaling is necessary. At FADD6, the first argument is returned unchanged; at FADD9, the second is returned unchanged. The subroutine scales BMANT at FADD10 and AMANT at FADD11. The exponent of the result is then the exponent of the unscaled argument. FADD7 adjusts the result's sign if the sum of the mantissas is negative, and NORMAL, when called, finishes up the addition.

### Other subroutines follow the pattern

Floating-point subtraction is easy to implement with the foregoing routine—change the subtrahend's sign and call FADD. And floating-point division is similar to multiplication: The result's sign is the exclusive OR of the argument signs, its exponent is the difference of the argument exponents and its mantissa is the quotient of the argument mantissas.

Converting a 32-bit integer to floating-point format is

also easy—set the sign (CSIGN) to the sign of the integer while forcing the integer positive, set the exponent (CEXP) to 23 (in excess-64 format) and store the integer in CMANT. NORMAL then finishes the processing, returning the floating-point representation in RR0. Floating-point absolute value and many other functions are also relatively easy to implement. **EDN**

### Author's biography

**Robert Grappel** is vice president of Hemenway Associates Inc, Boston, MA.

**Article Interest Quotient (Circle One)**  
**High 479 Medium 480 Low 481**


```

*
*
* FLOATING-POINT ADDITION SUBROUTINE
*
* CALL WITH ARG0 @R10, ARG1 @R11, R0=ARG0+ARG1
*
FADD1  PUSH @R15,R14          SAVE FRAME POINTER
      LD R14,R15             NEW FRAME
      SUB R15,#18             18 BYTES OF STORAGE
      CALR SETUP             SET-UP ARGS.
*
FADD2  CLRB CSIGN(R15)        CHECK ARG0 SIGN
      TESTB ASIGN(R15)        IF PLUS, O.K.
      JR PL,FADD3
*
      LD R0,AMANT(R15)        IF MINUS, - AMANT
      LD R1,AMANT+2(R15)
      CALR COMP2             TWOS-COMPLEMENT
      LD AMANT(R15),R0
      LD AMANT+2(R15),R1
*
FADD3  TESTB BSIGN(R15)       CHECK ARG1 SIGN
      JR PL,FADD4
      LD R0,BMANT(R15)        IF MINUS, - BMANT
      LD R1,BMANT+2(R15)
      CALR COMP2             TWOS-COMPLEMENT
      LD BMANT(R15),R0
      LD BMANT+2(R15),R1
*
FADD4  LDB RH6,AEXP(R15)      GET DIFFERENCE OF EXPS.
      SUBB RH6,BEXP(R15)      COPY DIFFERENCE
      LDB RL7,RH6             MAKE WORD
      EXTB RH7
      TESTB RH6
      JR PL,FADD5
      NEGB RH6
      IF MINUS, NEGATE IT
*
FADD5  CPB RH6,#24            WITHIN RANGE (0-23)?
      JR ULT,FADD10           YES
*
* OUT OF RANGE, RETURN LARGER OF "A" OR "B"
*
      TEST R7
      JR MI,FADD9             WHICH WAS BIGGER?
      IF <0, B>A
*
* A >> B, RETURN C=A
*
      LD R0,AMANT(R15)
      LD R1,AMANT+2(R15)
      LDB RH2,AEXP(R15)
      LDB RL2,ASIGN(R15)
      LD CMANT(R15),R0
      LD CMANT+2(R15),R1
      STORE VALUE INTO "C"
*
      LDB CEXP(R15),RH2
      LDB CSIGN(R15),RL2
      TEST CMANT(R15)
      JR PL,FADD8
      IF MINUS, NEGATE CMANT
*
      LD R0,CMANT(R15)
      LD R1,CMANT+2(R15)
      CALR COMP2             TWOS-COMPLEMENT
      LD CMANT(R15),R0
      LD CMANT+2(R15),R1
      LDB RH2,CSIGN(R15)
      XORB RH2,#80
      LDB CSIGN(R15),RH2
*
FADD8  JR FMUL2              NORMALIZE AND PACK
*
* B >> A, RETURN C=B
*
FADD9  LD R0,BMANT(R15)
      LD R1,BMANT+2(R15)
      LDB RH2,BEXP(R15)
      LDB RL2,BSIGN(R15)
      JR FADD6              FINISH UP
*
* WITHIN RANGE, SHIFT SMALLER NUMBER AND ADD
*
FADD10 TEST R7
      JR MI,FADD11           A>B?
      NO
*
      LD R0,BMANT(R15)
      LD R1,BMANT+2(R15)
      NEG R7
      SDAL R0,R7             ADJUST BMANT
      LD R2,AMANT(R15)
      ADD R1,AMANT+2(R15)
      ADC R0,R2
      LD CMANT(R15),R0
      LD CMANT+2(R15),R1
      LDB RHO,AEXP(R15)
      LDB CEXP(R15),RHO
      JR FADD7              FINISH UP
*
FADD11 LD R0,AMANT(R15)
      LD R1,AMANT+2(R15)
      SDAL R0,R7             ADJUST AMANT
      LD R2,BMANT(R15)
      ADD R1,BMANT+2(R15)
      ADC R0,R2
      LD CMANT(R15),R0
      LD CMANT+2(R15),R1
      LDB RHO,BEXP(R15)
      LDB CEXP(R15),RHO
      JR FADD7              FINISH UP

```



**"I can't afford less than the best components  
in my data acquisition systems."**

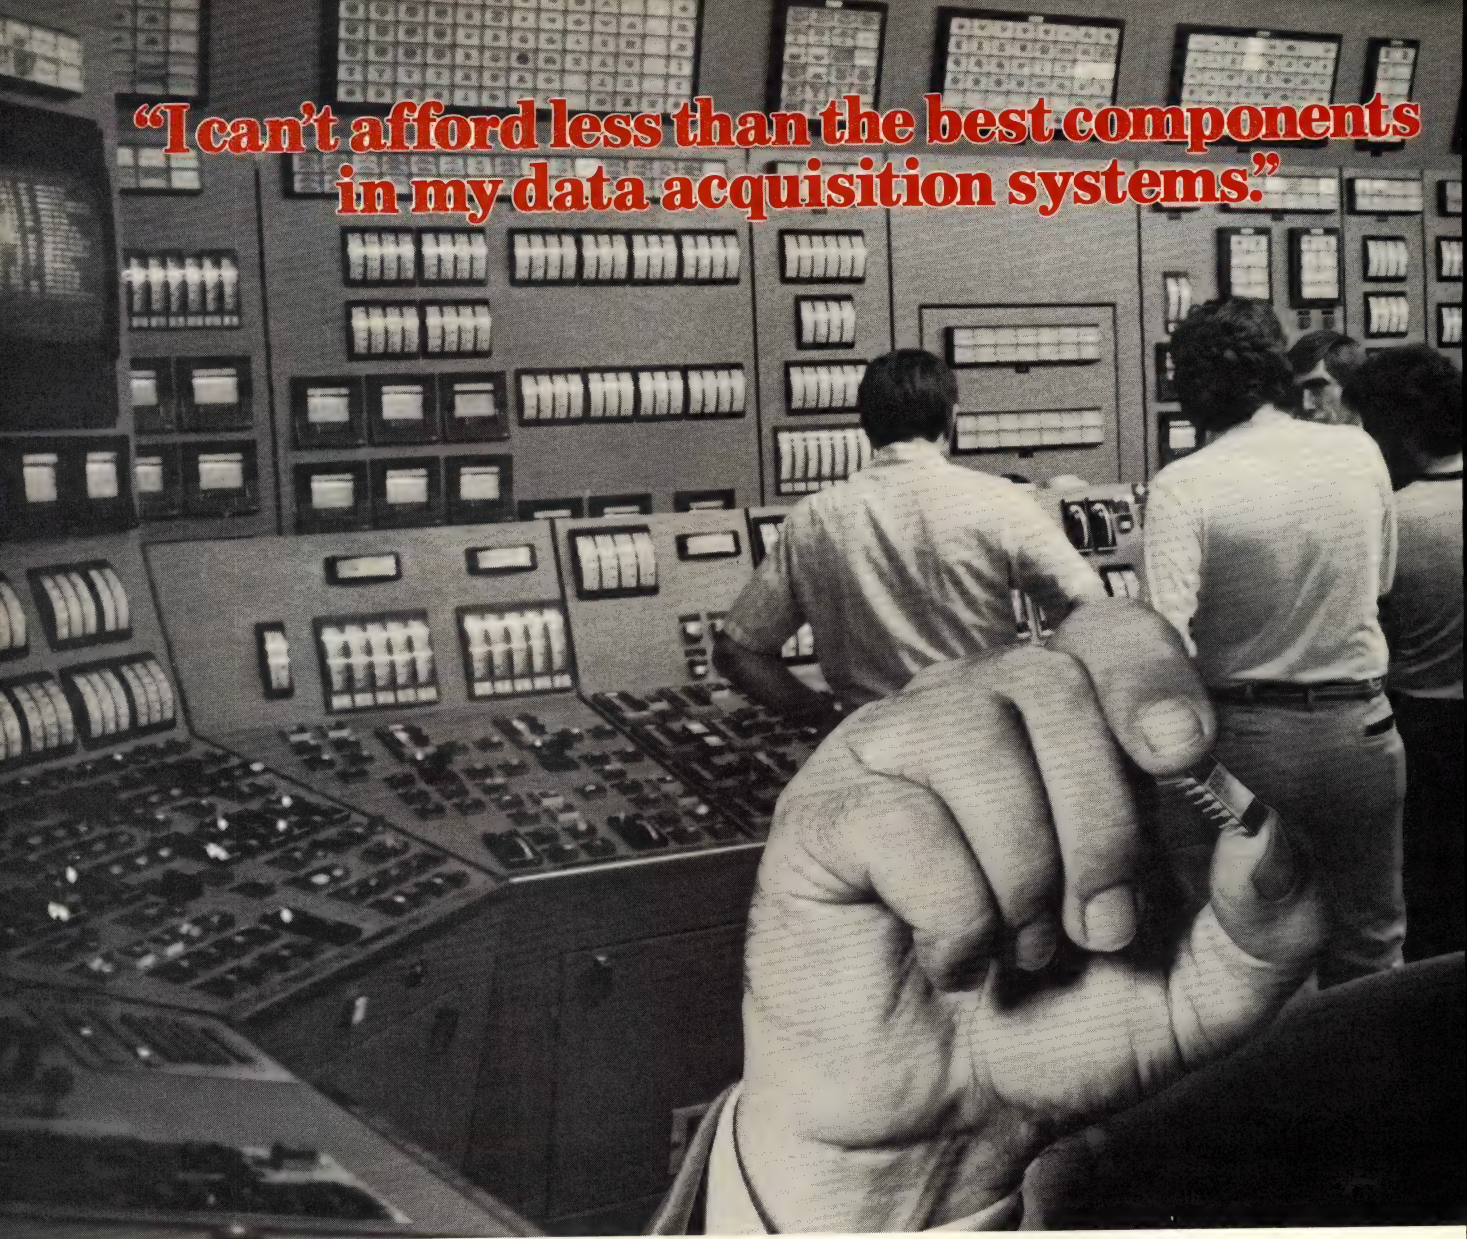

## **Now! Harris introduces Precision Voltage References as good as your systems!**

Now, Harris Semiconductor gives you a new family of monolithic voltage references that meet the precision and accuracy requirements of today's high resolution data systems—over temperature, over time, over load.

The Harris HA-1600, HA-1610, HA-1615 and HA-1620 are laser-trimmed for precise output voltages within a few millivolts of nominal value. All devices feature outputs buffered by an op amp with an uncommitted feedback loop for current drive flexibility and stability under load.


The HA-1600, HA-1610 and HA-1615 are +10 V output devices. The HA-1620 is a +5 V reference with the additional feature that the output can be adjusted  $\pm 0.5$  V.

Accuracies of this line of references go to  $\pm 1$  LSB over full military temperature range for 12-bit systems.



**Here's the important bottom line—now you can get a reference that is as good as your system, with accuracies to better than 1 LSB!**

Put a new level of accuracy into your data acquisition system. Specify Harris voltage references. Prices range from \$5.00 for the commercial version of the HA-1615, to \$30.00 for the military version of the HA-1600 (100-999 quantities). Availability from stock.


Call the Harris Hot Line, or write: Harris Semiconductor Products Division, Box 883, Melbourne, Florida 32901.






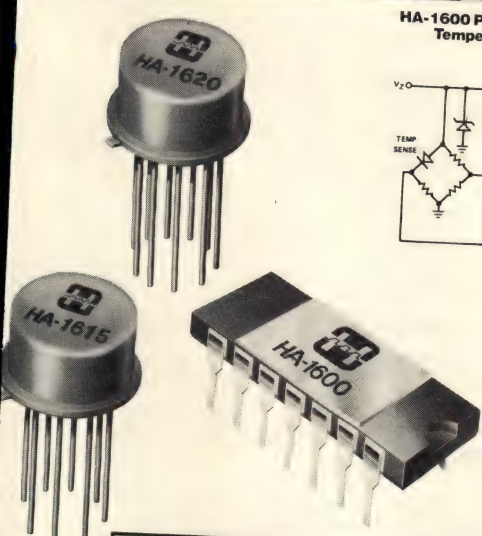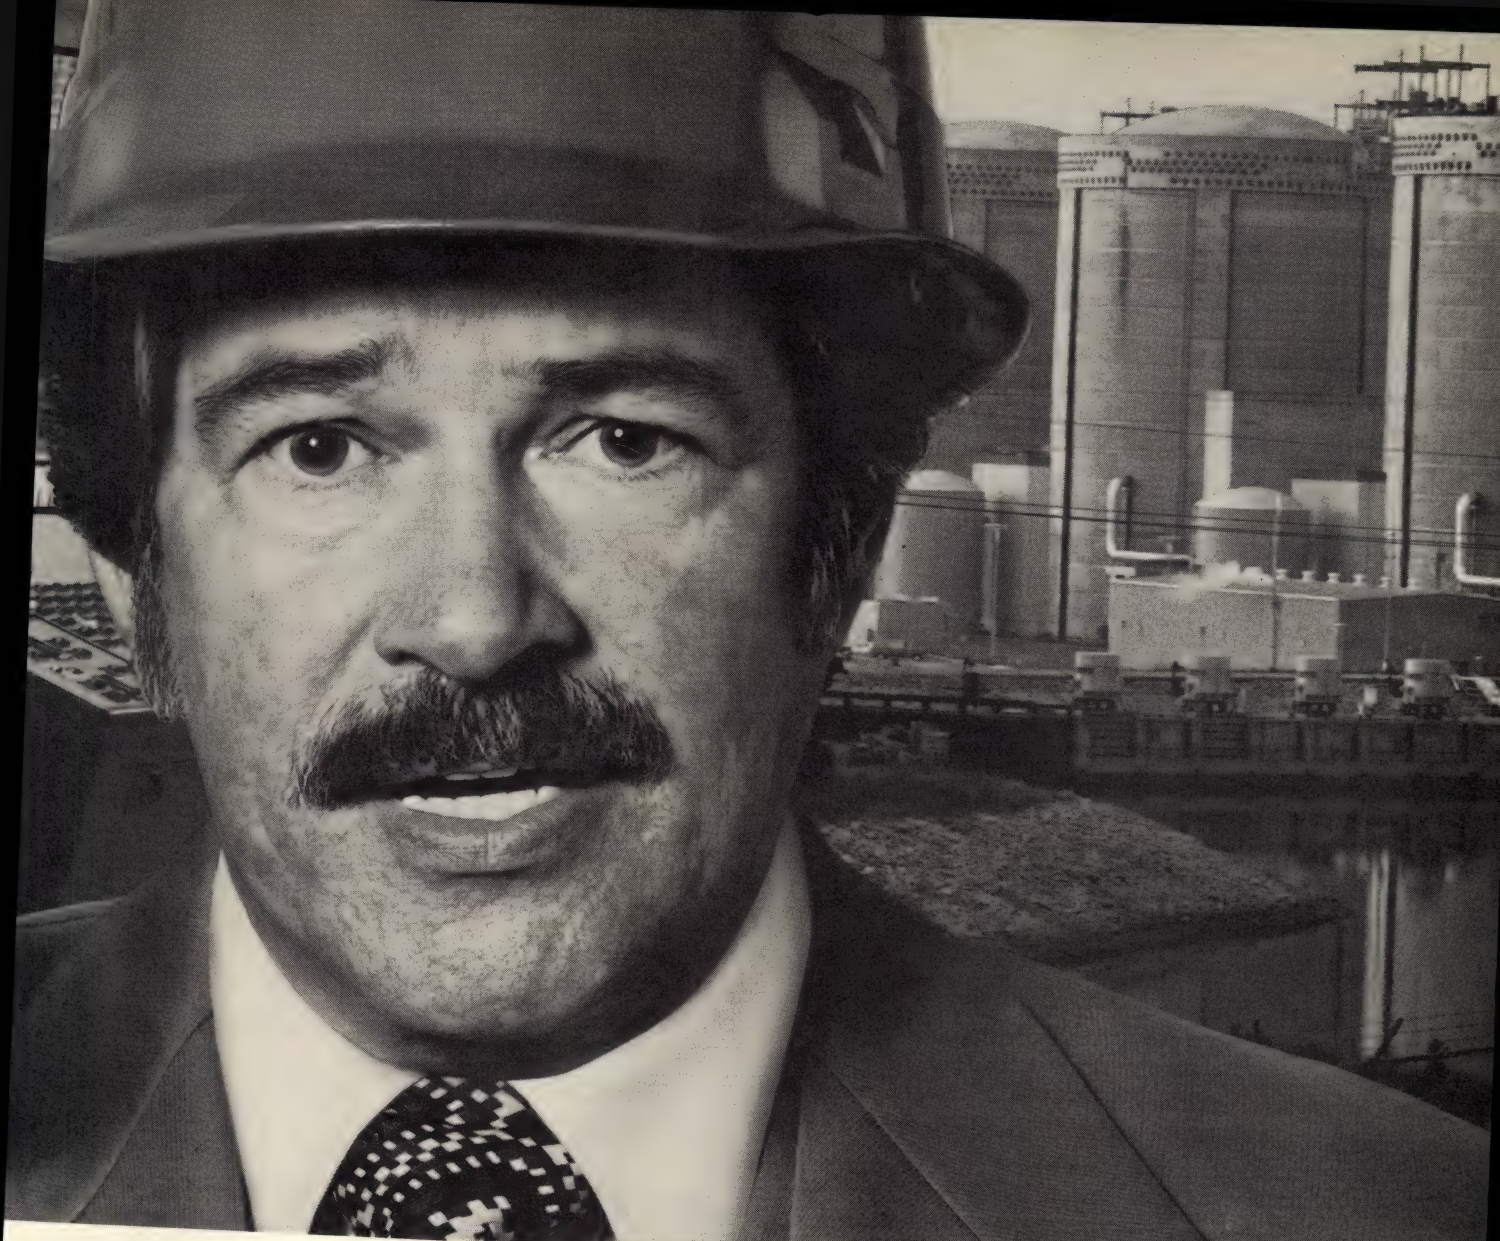


**HA-1600 Precision 10 Volt Reference Temperature Regulated Chip**



**HA-1610/HA-1615 10 Volt Precision Reference**



**HA-1620 Precision 5 Volt Reference With Adjustable Output**

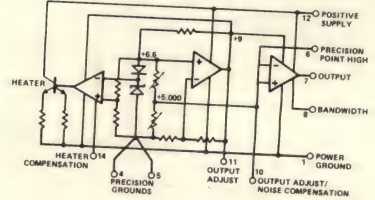

**Harris Precision Voltage References Performance Parameters**

Harris Part No.	Output Voltage	Temperature Range	Package	Tempco, Max. (ppm/°C)	Line Reg., Max. (%/V)	Load Reg., Max. (%/mA)	Resolution for 1 LSB Accuracy
HA1-1600-2	+10	-55 to +125°C	14-Pin Hermetic Dip	1.35	0.002	0.002	12 Bits
HA1-1602-2	+10	-55 to +125°C	14-Pin Hermetic Dip	2.70	0.002	0.002	11 Bits
HA1-1605-5	+10	0 to +75°C	14-Pin Hermetic Dip	3.25	0.002	0.004	12 Bits
HA2-1610-2	+10	-55 to +125°C	TO-99 Metal Can	3.0	0.004	0.004	10 Bits
HA2-1615-2	+10	-55 to +125°C	TO-99 Metal Can	3.0	0.004	0.004	12 Bits
HA2-1615-5	+10	0 to +75°C	TO-99 Metal Can	5.0	0.004	0.004	9 Bits
HA2-1620-2	+5	-55 to +125°C	TO-100 Metal Can	1.0	0.002	0.002	12 Bits
HA2-1620-5	+5	0 to +75°C	TO-100 Metal Can	1.0	0.002	0.002	13 Bits

**HARRIS HOT LINE!**  
**1-800-528-6050, Ext. 455**

In Arizona: 1-800-352-0458, Ext. 455  
 Call toll-free (except Hawaii & Alaska) for phone number of your nearby Harris sales office, authorized distributor or expedited literature service. Or check your IC MASTER for complete product listing and specifications.

*Harris Technology*  
*... Your Competitive Edge*



**HARRIS**  
**SEMICONDUCTOR**  
**PRODUCTS DIVISION**  
 A DIVISION OF HARRIS CORPORATION



# Let your LSI-11\* break the 28K barrier



## With our Bank-Switching family

In LOCAL mode our memory is functionally just like DEC memory. But when you run out of memory space you're not lost. Add an inexpensive Bank-Switch Controller (BSC-256) and you can go to **two megabytes**. Add another and go to **four megabytes**.

So don't get boxed in with other brands of LSI-11\* memory. Break free. Join the family:

<b>RMA-032</b>	32K by 16 bit RAM. On-board refresh	\$990 (Single qty.)
<b>RMS-016</b>	16K by 16 bit ROM. (Intel 2716)	\$300 (Single qty.)
<b>BSC-256</b>	The Bank-Switch Controller	\$300 (Single qty.)

*Substantial quantity discounts are available. The RMA-032 is also available without memory chips for \$450 (single quantity). For a free copy of our Bank-Switching manual, call or write on your company letterhead.*

Digital Pathways Inc.  
4151 Middlefield Road  
Palo Alto, CA 94306  
(415) 493-5544

*\*Registered trademark of Digital Equipment Corporation*



# DIGITAL PATHWAYS

For more information, Circle No 128



# ELEC-TROL SOLID STATE RELAYS



## NEW EXPANDED LINE OF SOLID STATE RELAYS AND DRIVERS

Elec-Trol has expanded its line of solid state relays to include hybrid and opto-coupled units with ratings from .2 amps through 40 amps, 10 VAC through 480 VAC. The line also includes drivers for isolated control of thyristors as well as VDE conforming relays featuring 8mm spacing input-to-output and 3mm spacing from heat sink to nearest live part.

Two chassis-mounted power switching relays are now offered—the industry standard “Hockey Puck” and a new DUOTAB™ that is comparable electrically and thermally but physically smaller and lower priced. Also available are PCB models for power or low-level switching, 8-pin DIP models, and drivers for thyristors—with more to come.

Elec-Trol—the leading manufacturer of reed relays for almost 20 years—has offered a limited line of solid state relays for more than 5 years. But now the limits are off. So for both reed and solid state relays—you can look to Elec-Trol.

Send for our Solid State Relay Catalog.

Elec-Trol, Inc., 26477 N. Golden Valley Road, Saugus, CA 91350. (213) 788-7292, (805) 252-8330, Telex 18-1151.

# ELEC-TROL

For more information, Circle no 129

# ELEC-TROL REED RELAYS



## YOUR FIRST SOURCE FOR REED RELAYS

Elec-Trol has a reed relay to fit almost every application and budget. That's probably why no one else in the United States sells more dry reed relays than Elec-Trol. Encased Line, Molded Line, Blue Boy and Dual Inline Packages (DIP)—all designed and built to withstand exposure to board washing—all IC compatible. Plus, a versatile relay at low cost, the Elec-Trol Open Line. For off-the-shelf delivery, contact your local distributor.

## AUTHORIZED DISTRIBUTORS

**ALABAMA** HUNTSVILLE  
Component Distributors, Inc. (205) 883-7501  
**ARIZONA** TEMPE  
Acacia Sales, Inc. (602) 894-2874  
**CALIFORNIA** IRVINE  
Acacia Sales, Inc. (714) 549-0954,  
(213) 971-2428  
**CALIFORNIA** SAN DIEGO  
Acacia Sales, Inc. (714) 565-4365  
**CALIFORNIA** SUNNYVALE  
Acacia Sales, Inc. (408) 745-7200  
**CALIFORNIA** VAN NUYS  
Patane Avionics, Inc. (213) 988-4455  
**COLORADO** LAKEWOOD  
Acacia Sales, Inc. (303) 232-2882  
**FLORIDA** CLEARWATER  
Diplomat Electronics, Inc. (813) 443-4514  
**FLORIDA** FORT LAUDERDALE  
Component Distributors, Inc. (305) 971-4950  
**ILLINOIS** BENSENVILLE  
Diplomat Electronics, Inc. (312) 595-1000  
**MASSACHUSETTS** HOLLISTON  
Diplomat Electronics, Inc. (617) 429-4121  
**MICHIGAN** FARMINGTON  
Diplomat Electronics, Inc. (313) 477-3200  
**MINNESOTA** MINNEAPOLIS  
Diplomat Electronics, Inc. (612) 788-8601  
**NEW JERSEY** EDISON  
Brothers Electronics, Inc. (201) 985-3000  
**NEW YORK** MT. VERNON  
Kin-Tronics, Inc.  
(914) 668-9885  
**OHIO** SOLON (CLEVELAND)  
Repeco (216) 248-8900  
**PENNSYLVANIA**  
HUNTINGDON VALLEY  
Shap Electronics, Inc. (215) 322-7150  
**TEXAS** IRVING  
Solid State Electronics Co. of Texas, Inc.  
(214) 438-5700  
**TEXAS** HOUSTON  
Harrison Equipment Co. (713) 652-4750  
Solid State Electronics Co. of Texas, Inc.  
(713) 772-8510  
**UTAH** SALT LAKE CITY  
Diplomat Electronics, Inc. (801) 486-4134

For more information, Circle no 130



# "I went flat instead of fluff."



"As an engineer, I used to get pretty frazzled whenever I had to use twisted pairs.

Heaven knows, I needed the performance, but the labor costs drove me wild!

Then one day Dave from Spectra-Strip stopped by and solved all my problems—he showed me their new Twist 'N' Flat.®

How fantastic—twisted pairs in a flat cable with flat, parallel sections that I can mass terminate wherever I need them on the cable. (Standard spacing is 18" of twist with 2" of flat, but if I order as little as a thousand feet at one time, they'll put in any spacing I want!)

Well, let me tell you—this has reduced termination time by 97% and cut our costs by 36%. I liked their thinking so much, I checked them out and found that they were a terrific

source for all my flat cable needs—cable, connectors, and even complete terminated jumpers and custom assemblies, fully tested and ready to go.

If you're as concerned about your interconnect performance and costs as I am, you really ought to write Spectra-Strip, 7100 Lampson Avenue, Garden Grove, CA 92642, telephone (714) 892-3361. In the East, call (203) 281-3200.

But don't ask for Dave—he's at home taking care of the baby."

**See Us At Electro '80, Booths 1130/1132.**



**When you're down to the wire.**



# Lick power-supply heat problems with good thermal management

*Based on the premise that it's better to prevent problems than be forced to solve them, this simplified method quantifies the heat rise of a power supply to help forestall thermal woes.*

**Paul J LaBrie and William D Miller,**  
Semiconductor Circuits Inc

A few simple calculations can tell you whether a system and its power supply will thrive or perish when both share the same enclosure. Based on fundamental physical laws, the method lets you approximate the average case-temperature rise of your power supply as a function of the unit's power output, efficiency and package characteristics. By factoring in the supply's temperature rise with that measured for the system, you can determine whether the result exceeds specified temperature limits.

Note, however, that although this approach warns you of early catastrophic failures caused by excessive internal heating, it tells nothing about the extent to which elevated-temperature operation reduces a supply's mean time between failures (MTBF). Here, what you *can't* compute can hurt you (see **box**, "High temperatures reduce MTBF").

## Consider some power-source basics

The appropriate power source for a given application must satisfy several general requirements:

- Deliver specified dc power, yet produce minimal rise in case temperature
- Perform to rated specifications within the actual system environment
- Maintain an acceptable life expectancy under actual operating conditions
- Fit the mechanical requirements imposed by the system
- Meet the price/performance criteria set forth for its function.

To quantify power-supply performance, recall that a source's output power is the product of its dc output voltage and current:

$$P_{OUT} = V_{OUT} \times I_{OUT}. \quad (1)$$

Additionally, input power is the product of instantaneous voltage and current averaged over a full power-input cycle:

$$P_{IN} = P_{AVG} = \frac{1}{T} \int_0^T V(t)I(t)dt. \quad (2)$$

(Usually, an electrodynamic wattmeter provides sufficient accuracy to measure  $P_{IN}$  for either line-operated power supplies or dc/dc converters. See EDN, October 5, 1979, pg 129 for more details.)

Defining efficiency as the ratio of output to input power expressed as a percentage results in


$$\eta = \frac{P_{OUT}}{P_{IN}} \times 100\%. \quad (3)$$

All practical power sources exhibit internal power losses that transform into heat, generating the all-too-familiar case-temperature rise. Power transformers, rectifiers, regulators and electronic switches make major contributions to these internal dissipative power losses, producing a total loss expressed as

$$P_{DISS} = P_{IN} - P_{OUT}. \quad (4a)$$

Thus, the difference between a supply's input and output power determines its internal power dissipation, which in turn produces a temperature rise.

The power-dissipation relationship expressed by Eq 4a becomes more useful when expressed in terms of

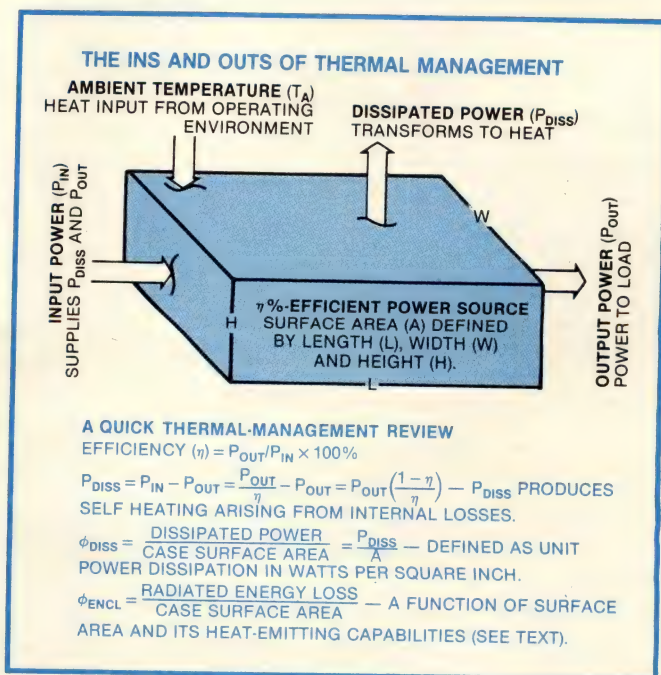



## Hot-running supplies lead to dissipation problems and low MTBF

efficiency ( $\eta$ ) and output power:

$$P_{DISS} = P_{OUT} \frac{(1 - \eta)}{\eta} \quad (4b)$$

With  $P_{DISS}$  now a function of known or easily measured quantities, you can define  $\phi_{DISS}$  as the unit power dissipation in watts per square inch:

$$\phi_{DISS} = \frac{P_{DISS}}{A} \quad (4c)$$

where  $A$  represents the power source's surface area (usually that of the case), which radiates its internally generated heat to the surrounding environment.

In Fig 1, curve A indicates the surface-temperature rise of an enclosure as a function of  $\phi_{DISS}$  for a nominal enclosure-surface emissivity of 0.9. Curve A closely conforms to Stefan's Law, which describes the rate of radiant-energy emission from a body's surface:

$$R = \epsilon_T \sigma (T_2^4 - T_1^4) \quad (5a)$$

where  $\epsilon_T$  is emissivity (a dimensionless ratio),  $T_2$  and  $T_1$  are the absolute temperatures of the power source and ambient, respectively, and  $\sigma$  is a constant. In a 23°C (300°K) ambient, a dimensionally modified form of Eq 5a results in

$$R \approx (7.34 \times 10^{-11}) \epsilon_T (T_2^4 - T_1^4) \quad (5b)$$

with the temperature difference ( $T_2 - T_1$ ) expressed in degrees Celsius.

### Adjust the theory for practical uses

Again referring to Fig 1, note that curve B, a straight line with a slope of 125°C/W/in.<sup>2</sup>, closely approximates curve A. Given a power source's output power, efficiency and geometry and assuming a surface emissivity of 0.9, it becomes a simple exercise to calculate the source's average case-temperature rise.

**Example 1:** Compute the average case-temperature rise of an encapsulated modular power source that operates at 75% efficiency when delivering 24W of output power. The package measures 5.5 in. long, 3.5 in. wide and 1.25 in. high; emissivity specs at 0.9, and all six surface areas radiate heat.

**Solution:** Knowing that  $P_{DISS}$ , the internal power dissipated by the source, generates the case-temperature rise of interest:

1. Calculate  $P_{DISS}$  as expressed in Eq 4b:

$$\begin{aligned} P_{DISS} &= P_{OUT} \left( \frac{1 - \eta}{\eta} \right) \\ &= 24W \left( \frac{1 - 0.75}{0.75} \right) = 8W \end{aligned}$$

2. Calculate the radiating surface area:

$$\begin{aligned} A &= 2[(LW) + (LH) + (WH)] \\ &= 2[(5.5 \times 3.5) + (5.5 \times 1.25) + (3.5 \times 1.25)] \\ &= 61 \text{ in.}^2 \end{aligned}$$

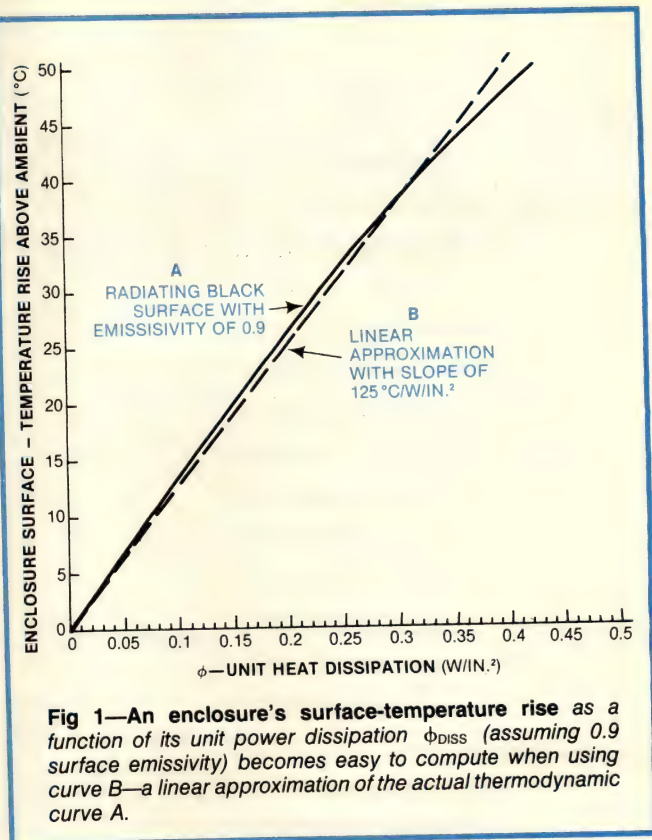


Fig 1—An enclosure's surface-temperature rise as a function of its unit power dissipation  $\phi_{DISS}$  (assuming 0.9 surface emissivity) becomes easy to compute when using curve B—a linear approximation of the actual thermodynamic curve A.

3. Calculate the average case-temperature rise ( $\Delta \bar{T}_C$ ) using the straight-line equation of Fig 1:

$$\Delta \bar{T}_C = \frac{125^\circ\text{C}}{\text{W/in.}^2} \times (P_{DISS}/A) = \frac{125}{8/\text{in.}^2} \times \frac{8}{61} = 16.4^\circ\text{C}.$$

The value of  $\Delta \bar{T}_C$  in this example applies to a specific encapsulated modular power supply manufactured by Semiconductor Circuits Inc; thermocouple measurements averaged over the case surface area yield a measured  $\Delta \bar{T}_C$  in close agreement with the value

### High temperatures reduce MTBF

Because power-supply manufacturers possess the schematic and parts list for each of their product designs, only they can calculate each product's reliability in terms of MTBF and the reduction in MTBF with increasing temperature. For example, the MTBF of one commercially available power-supply family decreases by about 2500 hrs/°C between 25 and 55°C and by about 3000 hrs/°C between 55 and 71°C. These figures are unique to the product in question, though, so don't consider them generally applicable.

Operating in a 25°C ambient, these power sources are rated at 100,000 hrs MTBF. Now suppose one of the units must operate in a system enclosure that maintains an equilibrium temperature of 55°C. Operation at this elevated temperature decreases the supply's MTBF to approximately 25,000 hrs—a whopping 75% loss of reliability for a 30°C temperature rise.



computed in **Example 1**. However, the method described works equally well for other package configurations, provided you evaluate the geometry and thermal characteristics of each design.

Allowing for these characteristics yields a general method for estimating the average case-temperature rise of a power source with known efficiency ( $\eta$ ), radiating-surface area ( $A$ ) and output power ( $P_{OUT}$ ). First, use **Eq 4b** to calculate the unit dissipated power in watts. Then calculate the radiating-surface area of the package in square inches. Next, using **Eq 4c**, calculate unit power dissipation in watts per square inch. Finally, calculate the average case-temperature rise in degrees Celsius:

$$\Delta \bar{T}_C = \frac{125^\circ\text{C}}{\text{W/in.}^2} \times \phi_{DISS} = \frac{125^\circ\text{C}}{\text{W/in.}^2} \times \frac{P_{OUT} \left( \frac{1-\eta}{\eta} \right)}{A} \quad (6)$$

where  $125^\circ\text{C/W.in.}^2$  is the linear approximation of the slope of curve A in **Fig 1**.

Note that you can easily determine any of the four key parameters involved in these thermal-management calculations in terms of the remaining three. Specifically, it's easy to transpose **Eq 6** to solve for one of the other three parameters of interest:

Radiating-surface area—

$$A = \frac{125^\circ\text{C}}{\text{W/in.}^2} \times \frac{P_{OUT}}{\Delta \bar{T}_C} \left( \frac{1-\eta}{\eta} \right) \quad (7a)$$

Output power—

$$P_{OUT} = \left( \frac{\eta}{1-\eta} \right) \left( \frac{A \Delta \bar{T}_C}{125} \right) \quad (7b)$$

Efficiency—

$$\eta = \frac{1}{1 + \frac{A \Delta \bar{T}_C}{(125)P_{OUT}}} \quad (7c)$$

These equations serve as useful cross-checks to confirm that you're managing heat as well as you think you are.

**Example 2:** Suppose you're considering a 20W power supply which claims 80% efficiency and exhibits an average case-temperature rise of  $10^\circ\text{C}$ . What must the surface area be?

**Solution:** To meet these requirements, **Eq 7a** demands a radiating-surface area of

$$\begin{aligned} A &\geq \frac{125^\circ\text{C}}{\text{W/in.}^2} \left( \frac{20\text{W}}{10^\circ\text{C}} \right) \left( \frac{1-0.8}{0.8} \right) \\ &\geq \frac{250}{4} \geq 62.5 \text{ in.}^2 \end{aligned}$$

Now compare this figure to the surface area of the power source you're evaluating.

If you're evaluating an encapsulated modular power supply or dc/dc converter, it's usually safe to assume that all surfaces radiate. Additionally, the solution to **Example 2** assumes that the stated efficiency value is

valid for all conditions of interest. In practice, though, remember that efficiency generally varies with input and load conditions; the solution varies accordingly.

If  $A$  for the evaluated supply is significantly less than  $62.5 \text{ in.}^2$ , that supply might be touted as providing "more watts per cubic inch" while operating with an excessive case-temperature rise. Such performance increases the likelihood of premature failure of both the supply and any system that shares an enclosure with it. To avoid this situation, demand a lower temperature rise per watt of output power—an approach that calls for appropriate values of radiating-surface area and efficiency.

### Graphical solutions are all in the family

As an alternative to computing all the heat-management variables required for an application, **Fig 2** displays a family of solutions to **Eq 6**; these curves relate average case-temperature rise to efficiency, with unit output power a parameter. A hand-held calculator also provides quick and easy solutions to **Eq 6**, making it equally simple to generate additional curves or solve for a single set of conditions.

The range of operating conditions spanned by **Fig 2's** curves covers many applications, and graphical addition allows you to derive values of  $\Delta \bar{T}_C$  that correspond to equivalent curves for which  $\phi_{OUT}$  can range between 0.1 and  $2.2 \text{ W/in.}^2$ . **Fig 2** shows an example in which the constant-efficiency line for  $\eta=50\%$  intersects the  $0.1$  and  $0.2 \text{ W/in.}^2$  curves at  $\Delta \bar{T}_C=12.5^\circ\text{C}$  and  $25^\circ\text{C}$ , respectively. The result is the sum of the two average temperature rises:

$$\Delta \bar{T}_{C1} + \Delta \bar{T}_{C2} = 12.5^\circ\text{C} + 25^\circ\text{C} = 37.5^\circ\text{C}.$$

Although this value happens to coincide with the  $0.3 \text{ W/in.}^2$  curve, you can compute between-curve values just as simply.

### The curve family solves problems

In addition to providing specific **Eq 6** values for a given set of parameters, the curves of **Fig 2** display trends and can point out limits beyond which thermal management becomes a dubious proposition. The following example illustrates how useful **Fig 2's** curves are.

**Example 3:** You wish to predict the average case-temperature rise of an 80%-efficient switching power supply. It delivers 5V dc at 12A and occupies a package having  $60 \text{ in.}^2$  of radiating surface area and an emissivity of 0.9.

**Solution:** To utilize **Fig 2**, first calculate  $\phi_{OUT}$ :

$$\phi_{OUT} = \frac{E_{OUT} \times I_{OUT}}{A} = \frac{P_{OUT}}{A} = \frac{5 \times 12}{60} = 1 \text{ W/in.}^2$$

Now refer to the  $1 \text{ W/in.}^2$  curve and follow it to the 80%-efficiency intersection. The average case-temperature rise corresponding to 80% efficiency and  $\phi_{OUT}=1 \text{ W/in.}^2$  is  $30^\circ\text{C}$ .

Suppose you consider this example's temperature



## Good thermal management avoids nonuniform surface temperatures

rise excessive and want to halve it. Fig 2 shows that if you halve the output power while efficiency remains at 80%, you also halve the temperature rise; the curve labelled  $\phi_{OUT}=0.5W/in.^2$  now describes the supply's thermal behavior. Other alternatives include increasing efficiency and/or radiating-surface area.

If Fig 2 contains neither a curve nor a graphically additive value equal to your computed  $\phi_{OUT}$ , merely plot the computed value on the appropriate vertical constant-efficiency line and note its distance from the curves that bound it. For example, a computed  $\phi_{OUT}$  of  $0.15W/in.^2$  lies midway between the curves labeled  $0.1$  and  $0.2W/in.^2$ . For a 50%-efficient supply, a  $\Delta\bar{T}_C$  of  $18^\circ C$  is a reasonable approximation, inasmuch as the value computed by Eq 6 equals  $18.75^\circ C$ . In practice, regard the temperature increases obtained by the algebraic or graphical methods presented here as boundaries that mustn't be crossed and that should, in fact, be given the widest possible margin.

### Utilize these methods carefully

When you apply the methods described in this article, realize that many factors affect the accuracy of the solutions obtained. To get valid plotted results, for example, the specified efficiency must be accurate, free space must be available for radiation and all radiating

surfaces must be equally efficient as dissipators.

Remember when specifying efficiency that it can vary with changes in either input or load conditions; use the actual efficiency value achieved by a supply under the operating conditions in question when solving Eq 6 in its algebraic or graphical form. You might have to measure input and output power to determine efficiency if the manufacturer doesn't provide sufficient information.

Without forced-air cooling, a supply's efficiency and radiating-surface area determine the average case-temperature rise for any permissible power output. Thus, the laws of thermodynamics and electronics establish a power source's package size. As a rule of thumb, assume that power sources requiring no derating over the standard operating-temperature range (typically  $25$  to  $71^\circ C$ ) usually incorporate effective thermal management.

### A standard range can vary

Bear in mind when applying this rule, however, that the definition of operating-temperature range can differ among power-source manufacturers. One manufacturer, for example, might specify temperature range relative to ambient conditions, while another specs behavior relative to the case temperature. A vaguely defined temperature reference creates problems by implying greater thermal ruggedness than really exists, leading to supply misapplication and early failures induced by excessive thermal stressing.

Fig 3 illustrates three types of thermal behavior.

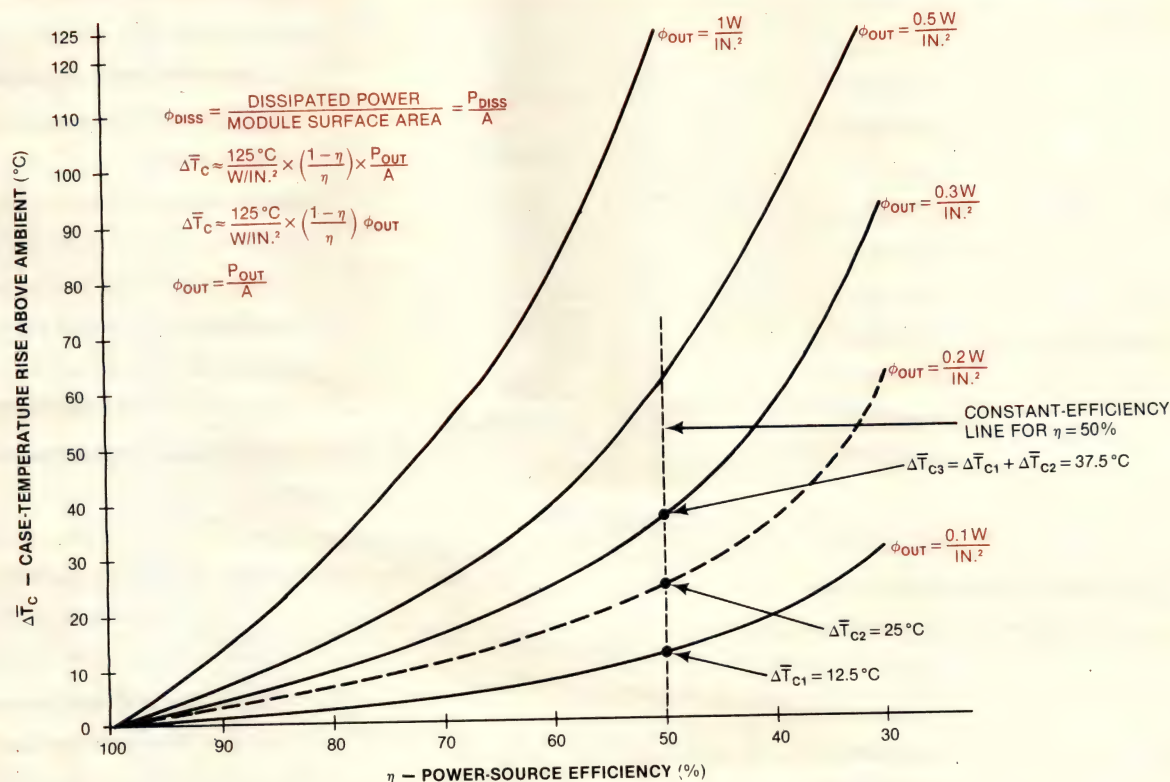


Fig 2—These curves solve for case temperature, using known parameters of  $\eta$ ,  $A$  and  $P_{OUT}$ .



Curve A displays the thermal capability of a power source that delivers full rated output over the  $-40$  to  $+70^{\circ}\text{C}$  ambient operating-temperature range. Because this unit requires no derating within its specified operating environment, it serves as a predictable and easy-to-use system component.

Curve B applies to a power source that requires derating but is still specified relative to ambient conditions. For it, output derating must begin at  $40^{\circ}\text{C}$  and requires a  $1\%/^{\circ}\text{C}$  derating factor. Provided derating conditions are clearly specified, this source also warrants consideration as a viable system component. The need for derating, though, indicates a higher internal temperature rise and probably somewhat reduced reliability.

For curve C, the power source carries a specification based on permissible case-temperature rise rather than ambient temperature. This specifying method's validity relies upon a clear declaration of its use and a clear definition of its limits. For example, a power source described by curve C could be specified over an operating-temperature range of  $-40$  to  $+100^{\circ}\text{C}$ . This apparently broad range becomes less impressive when you note that the source requires output derating above  $0^{\circ}\text{C}$  ambient and that you must derate power output to zero at the  $100^{\circ}\text{C}$  ambient-temperature extreme.


The moral is clear. If you're informed that a specification refers to case temperature and a graphical or verbal statement clearly defines the derating curve, you're dealing with a properly specified power source having predictable thermal requirements.

But keep your guard up against implied performance characteristics. For example, Fig 3 clearly shows that the power sources described by curves A and B require significantly less derating than the source described by curve C. However, the curves say nothing about the advisability of prolonged operation at or near the high-temperature limit. Because MTBF decreases with temperature extremes, you'll get the best reliability from a source by operating it in a moderate thermal environment, avoiding both high- and low-temperature extremes. (Extremely low temperatures can cause component failure arising from mechanical contraction, as well as condensation and reduced performance because of degraded transistor gain.)

Note that many respected manufacturers of 100W-and-above power sources specify their products relative to permissible case-temperature rise. No problem ensues, because they explicitly state the temperature reference and fully define any need for derating, cooling or heat sinking.

### Cool can be hot

Another thermal-management consideration relevant to power sources arises when a packaged source is enclosed with other system components. A source operating in the still air of a system enclosure can be approaching its melting point while the outer surface of the enclosure barely seems warm to the touch. As is true with a power source alone, an enclosure's internal

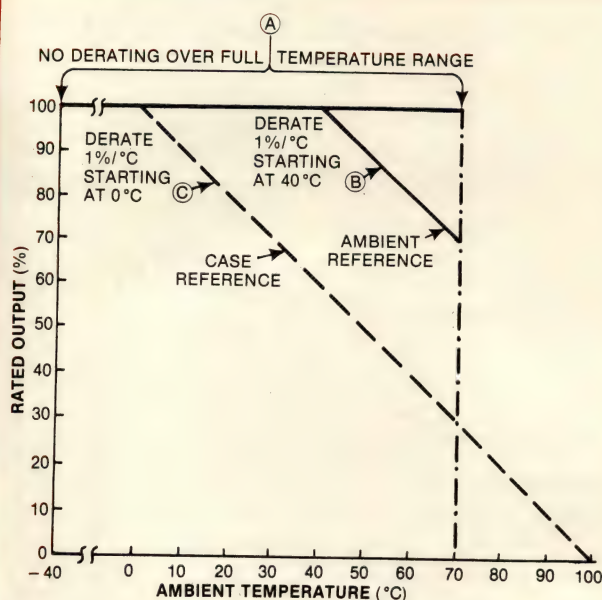

**Fig 3—Power-supply temperature specs** can be stated relative to ambient or case temperatures. If you assume the wrong reference, though, the supply will probably go up in smoke. A, B and C refer to supplies exhibiting three different temperature characteristics (see text).

temperature rise and the area and emissivity of its outer surface rank among the main factors that determine its surface-temperature rise.

**Example 4:** Place both a 40%-efficient, 8W power supply with 40 in.<sup>2</sup> of surface area and the circuitry it serves in an enclosure having 200 in.<sup>2</sup> of surface area; all surface areas exhibit an emissivity of 0.9. Find the average surface-temperature rise of both the enclosure and the supply.

**Solution:** With regard to the enclosure, its surface-temperature rise results from heat generated by both the power supply's internal dissipation and the load dissipation (assuming no other heat-contributing elements). Under these assumptions, the enclosure-temperature rise becomes proportional to the sum of  $P_{\text{DISS}}$  and  $P_{\text{OUT}}$ :

$$P_{\text{IN}} = \frac{P_{\text{OUT}}}{\eta} = P_{\text{DISS}} + P_{\text{OUT}} = \frac{8\text{W}}{0.4} = 20\text{W}$$

Because the supply operates within the enclosure, outputting its heat to the enclosure walls, the supply becomes the source of unit output power:

$$\phi_{\text{OUT}} = \frac{P_{\text{IN}}}{A_{\text{ENCL}}} = \frac{P_{\text{OUT}}/\eta}{A_{\text{ENCL}}} = \frac{20\text{W}}{200\text{ in.}^2} = 0.1\text{W/in.}^2$$

Either Eq 6 or the  $\phi_{\text{OUT}}=0.1\text{W/in.}^2$  curve in Fig 2 yields an average enclosure-temperature rise ( $\Delta\bar{T}_{\text{ENCL}}$ ) of  $18.75^{\circ}\text{C}$ .

Either Eq 6 or Fig 2's graphical approach gives the average power-supply case-temperature rise ( $\Delta\bar{T}_{\text{CSUPPLY}}$ ) as  $37.5^{\circ}\text{C}$ .

To compare the average temperature rise of the supply with that of the surrounding enclosure, note the



## Cool can be hot—if you bury a compact supply in a big enclosure

following relationships:

$$\begin{aligned}\frac{\Delta \bar{T}_{CSUPPLY}}{\Delta \bar{T}_{CENCL}} &= \frac{\phi_{OUTSUPPLY}}{\phi_{OUTENCL}} \\ &= \frac{P_{OUT}/A_{SUPPLY}}{P_{OUT}/\eta A_{ENCL}} \\ &= \frac{\eta A_{ENCL}}{A_{SUPPLY}}\end{aligned}\quad (8)$$

Comparing the previous solutions for average case-temperature rise with the equivalent equation just derived produces

$$\frac{\Delta \bar{T}_{CSUPPLY}}{\Delta \bar{T}_{CENCL}} = \frac{\eta A_{ENCL}}{A_{SUPPLY}} = \frac{(0.4)(200 \text{ in.}^2)}{40 \text{ in.}^2} = 2.$$

Note that increasing values of  $A_{ENCL}$  increase the proportion by which the power supply's average case-temperature rise exceeds that of the enclosure.

Utilizing an enclosure with a surface area much greater than the supply's, however, can mask a severe problem. If, for example,  $\phi_{ENCL}$  is  $\frac{1}{10}$  of  $\phi_{SUPPLY}$ , the supply's temperature can rise to catastrophic levels, even though the enclosure's surface-temperature rise might be barely discernible. For this condition, Eq 8 calls for a 10:1 ratio between  $\Delta \bar{T}_{CSUPPLY}$  and  $\Delta \bar{T}_{CENCL}$ , making  $\Delta \bar{T}_C = 10\Delta \bar{T}_{CENCL}$ .

### Allocate enclosure space carefully

Power sources installed within enclosures also prompt several other considerations. To begin with, the internal layout of an enclosure that doesn't employ forced-air cooling must encourage the free flow of convective currents, particularly around the power source. Moreover, both energy conversion and the load's dissipated power generate heat, which the enclosure must shed efficiently to minimize its internal temperature rise. To avoid enclosure hot spots, therefore, never cram system components that dissipate significant amounts of power into corners or allow adjacent components to block airflow. Wherever possible, isolate heat-generating system components from one another; try to locate them so that a nearly uniform average temperature rise exists over the enclosure's outer surface.

Additionally, when mounting heat-generating components inside a system enclosure, orient each component to maximize heat transfer from it to the system environment. If, for example, a function module's heat-generating components reside near its top surface, that surface should face the top of the enclosure. Also, ensure that the radiated heat doesn't flow into an adjacent system component or into the power source itself.

### Expect absolutely no absolutes

When you apply the methods presented in this article, be aware that despite the fancy curves and rigorous-appearing equations, the methods do contain approximations. Specifically, the analysis linearizes Stefan's Law and then assumes that all radiating surface areas exhibit emissivities of 0.9. In addition, the examples involve only encapsulated modular power sources because of their clearcut geometry.


The linearization and the resulting Eq 6 provide results accurate to within  $\pm 5\%$  of the exact values over the range of 0 to  $0.4 \text{ W/in.}^2$ —sufficiently close for most applications. Of course, not all materials have an emissivity of 0.9, but most of those used for electronic-system enclosures come remarkably close. If in doubt about an enclosure material you're considering, by all means investigate. And for power sources not packaged in encapsulated modules, determine the thermal characteristics from the specifications and/or by contacting the manufacturer.

Finally, the temperature-averaging technique used here involves a further approximation—temperature gradients do exist in power sources. But proper design should minimize them sufficiently to validate computed averages. To dispel uncertainties, you can always perform simultaneous multipoint surface-temperature measurements of a source (or of an enclosure's internal temperature profile), using suitable resistance-temperature devices.


EDN

### Authors' biographies

**Paul J LaBrie**, president of Semiconductor Circuits Inc (SCI), Haverhill, MA, holds a BSEE from Merrimack College and has been granted four patents; he is an IEEE member. Active hobbies such as jogging, skiing, sailing and scuba diving occupy some of his spare time.



**William D Miller**, who heads Wm D Miller & Associates, Bedford, MA, served for  $4\frac{1}{2}$  yrs as technical communications consultant to SCI. Bill holds an Associate degree from Northeastern University. Alpine skiing and photography are his hobbies, but the avocation of microcomputer technology sometimes crowds them a bit.



Article Interest Quotient (Circle One)  
High 482 Medium 483 Low 484






## Beckman breaks the cost barrier in thin-film networks.

Now you can get the precision performance of thin-film networks at the low cost of metal-films. Our large volume production and extensive experience in resistor networks makes this low cost possible.

Our 14- and 16-pin DIP's, models 699 and 698, with their close ratio matching and exceptional temperature tracking, have the high performance of matched resistor sets, yet the per resistor price of individual discretes.

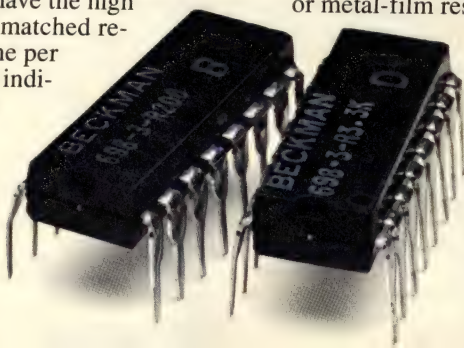

Using Beckman thin-film resistor networks results in more savings than just their direct cost, however. You also reduce component count, assembly costs and inventory levels.

Finally, thin-film networks can ease your reliability worries with their long-term accuracy and temperature stability. Whether you're using wirewound or metal-film resistors, Beckman's thin-film networks offer you a superior alternative.

In both performance and cost.

Call your local Beckman representative today, or write: Network Products Operations,

Beckman Instruments, Inc., 2500 Harbor Blvd., Fullerton, CA 92634. In Europe write: Beckman Instruments (Belgium) S.A., 14, Avenue Hamoir, 1180 Bruxelles, Belgium. Telex: 23577

- Low cost...comparable to metal-film discrete resistors.
- 1% to 0.1% resistor tolerances available.
- 0.1% ratio accuracy.
- $\pm 50$  P/10<sup>6</sup>/°C tempco for improved environmental stability.
- $\pm 5$  P/10<sup>6</sup>/°C tracking.
- Saves cost in manufacturing, stocking and inspection.

*Design Beckman thin-film in.  
Design problems out.*

# BECKMAN



# Rockwell announces in-circuit emulation at evaluation board prices.



## AIM 65-based Desktop Development Center cuts cost of R6500/1 family software and hardware design.

**Micro  
Power**

Rockwell International announces a microcomputer development system with in-circuit emulation at the price of most evaluation boards. The heart of this Desktop Development Center is the AIM 65 Advanced Interactive Microcomputer with full alphanumeric keyboard, printer and display.

AIM 65 connects to Rockwell's System 65-bus-compatible Motherboard\*, R6500/1 Personality Module and additional RAM card to achieve in-circuit emulation of Rockwell's R6500/1

single-chip microcomputer. The result: economical microprocessor evaluation, development, debugging and more. That's Rockwell Micropower!

AIM 65's resident Text and Symbolic Assembler Editor speed program development. And the Debug provides trace, edit, and breakpoint to troubleshoot software and hardware. An optional high level design language, PL/65, is available.


But the AIM 65 Desktop Development Center is more than just a development tool. Engineers use it as a self-study educational microcomputer, as a professional

printing microcomputer using BASIC, and as an OEM standard board computer.

The AIM 65 expands to include additional Rockwell RAM, PROM and ROM cards, and Rockwell Bubble Memory, as well as bus-compatible analog and solid state relay products from Burr-Brown, Compas Microsystems and others.

For more information contact your local distributor or write or call AIM 65 Marketing, Electronic Devices Division, Rockwell International, P.O. BOX 3669, RC55, Anaheim, CA 92803, (714) 632-3729.

\*Compatible with EXORciser® and Micro-module bus. EXORcisor® and Micromodule are trademarks of Motorola, Inc.



**Rockwell International**

...where science gets down to business

For more information, Circle No 133

EDN APRIL 20, 1980



# 6800 EXORciser<sup>TM</sup> Users...

## YOUR DREAM OF MEMORY EXPANSION HAS JUST COME TRUE



The new **STORAGE DEMON<sup>TM</sup>** Memory System brings you high performance 10 Megabyte storage capabilities for your EXORciser I, II, or III system. This high speed, high reliability Winchester technology system means virtually trouble-free operation in almost any environment.

The STORAGE DEMON is fully supported by SOFTWARE DYNAMICS' new SDOS interrupt-driven disk operating system. It features:

- ☐ Keyboard Typeahead
- ☐ Automatic Disk Read-ahead
- ☐ Automatic Disk Sector Pooling
- ☐ Dynamic Files With Random Access To Byte
- ☐ Complete Device Independence

SDOS supports EXORDisk<sup>TM</sup> I, II, and III, and permits you to use your existing floppy disk drives for additional memory storage and/or as back-up for the Winchester hard disk. The STORAGE DEMON utilizes the field-proven, dependable LOBO DRIVES INTERNATIONAL 10 Megabyte hard disk and controller and comes with the famous LOBO DRIVES 1 year, 100% warranty.

Make your dream of expanded memory come true...Write, call or mail the coupon today.



**SOFTWARE DYNAMICS**  
2111 W. Crescent, Ste. G / Anaheim, CA 92801  
(714) 635-4760

EDN 4/20/80

You've got my attention, tell me more about: ☐ STORAGE DEMON Memory System ☐ 6800 Development Software  
☐ SDOS ☐ MDOS Simulator Pkg. ☐ BASIC Compiler  
☐ EDIT ☐ ASM

Name \_\_\_\_\_ Title \_\_\_\_\_  
Company \_\_\_\_\_  
Address \_\_\_\_\_  
City, State, Zip \_\_\_\_\_  
Phone \_\_\_\_\_

**Quantity Discounts Available — Dealer Inquiries Invited**

EXORciser and EXORDisk are trademarks of Motorola, Inc.  
For more information, Circle No 134



# Outpost 11 has OEM written all over it. Get it into your system.



TANO's Outpost 11 is a highly flexible, easily adaptable microcomputer capable of handling virtually any control, communications, or stand-alone small business computing application. Two points make it the outstanding choice for incorporation into OEM systems: Cost. TANO's high-volume production means Outpost 11 is available at a most attractive price, with multi-unit discounts.

Reliability. Modular design using military/industrial grade components yields 6060-hour MTBF performance.

Add to that the finest software tools and a variety of interface options (serial line, parallel, digital acquisition or analog acquisition) and you have the most versatile microcomputer in its price range.

If you're an OEM, Outpost 11 has your name written all over it. See your nearest TANO representative and get it into your system.

TANO Corporation, 4301 Poche Court West, New Orleans, La. 70129



## TANO

For more information, Circle No 135

EDN APRIL 20, 1980



# Asynchronous-sampling method simplifies dual-port memories

*By increasing memory access speed, an innovative multiport-memory design overcomes the complex arbitration and synchronization constraints usually imposed on processors or peripherals.*

**Robert W Schmidt, Texas Instruments Inc**

If your system processing application calls for two or more devices to share a multiport memory, don't feel that you're confined to conventional techniques and their inherent shortcomings (see **box**, "Traditional memory-sharing techniques"). The asynchronous-sampling shared-memory method described in this article operates independently of attached devices, grants virtually instant memory access and obeys simple timing rules.


The technique easily handles such varied memory-interface applications as processor-to-processor connections and links between processors and CRT displays, disc controllers or ADCs. Although this article focuses on dual-port memories, you can readily expand the method to accommodate additional ports.

## Asynchronous sampling quickens memory speed

Basically, an asynchronous-sampling dual-port memory system consists of a shared-RAM array, input

multiplexers, input sampling latches and output latches (Fig 1). The output latches are clocked at the end of every other memory cycle, while the input latches are clocked at the beginning of every memory cycle. The input multiplexers alternately connect the data, address and control lines from ports A and B to the shared RAM.

To determine the minimum clock rate that permits nearly ideal multiport operation, make the following assumptions: Attached devices A and B operate asynchronously, and device A—the faster of the two—has a memory-access-time requirement of  $t_{AC}$  (Fig 2a). Note, too, that device Read and Write cycles designate simple Start/End sequences. At the beginning of either a Read or Write cycle, the data, address and control buses contain valid information. At the end of a Read cycle, stable Read data becomes available. Similarly, at the end of a Write cycle, the data-bus contents have been fully stored at the addressed locations. Finally, assume that in a manner mutually asynchronous to devices A and B, the

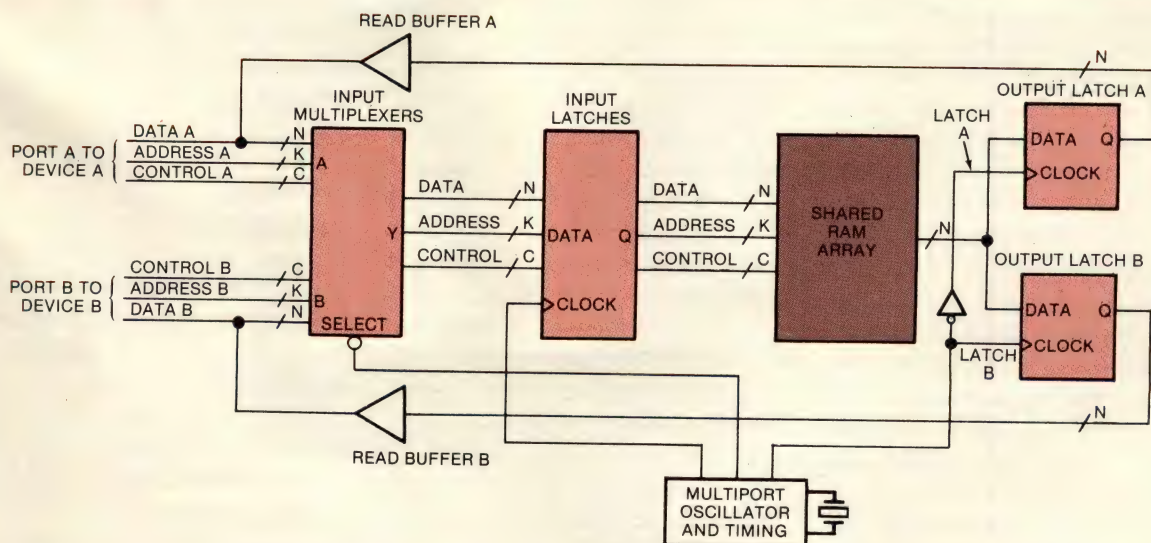

**Fig 1**—In an asynchronous-sampling dual-port memory system, devices A and B do not compete for access to the shared RAM array. Instead, under precise clock timing, input multiplexers and input and output latches alternately allocate memory access to ports A and B for data, address and control transactions.



## Current techniques inflict rigid access rules on shared memory

multiport sampling oscillator functions at a 50% duty cycle.

For a memory Read cycle in which the clock's sampling edge (**Fig 2b**) just misses the start of device A's access cycle ( $\Delta t$  exceeds 0), the next port-A cycle must complete before  $t_{AC}$ 's trailing edge occurs. Consequently, as  $\Delta t$  approaches 0,  $3t_{SAMPLE}$  approaches  $t_{AC}$ . You thus need at least two complete port-A cycles for the shortest possible device-A access cycle. (These conditions closely resemble those of the sampling theorem, which states that the sampling frequency must be at least twice the signal frequency.) Because a port-B cycle occurs between the two port-A cycles, however,  $t_{SAMPLE}$  actually becomes less than  $\frac{1}{2}t_{AC}$ . (You can conveniently extend this analysis to  $n$  ports, where  $t_{SAMPLE}$  becomes less than  $[1/(n+1)]t_{AC}$ .)

Recall that all inputs are latched at the beginning of a memory cycle; therefore, a memory Write cycle can complete after device A's access cycle has ended (**Fig 2c**). In this case, at least one clock sampling edge must occur asynchronously during the access cycle—a requirement guaranteed by forcing two or more sampling edges during any  $t_{AC}$  (Write) period. Although many CPUs provide short Write Enable signals, a 2:1 sampling rate achieves a much shorter  $t_{AC}$ .

### Dual-port design supports timing concepts

Turning from the theoretical to the real world, note that the system components that permit a single RAM array to function as a multiport memory also add

propagation delays to all signal paths. Thus, you must subtract these delays from  $t_{SAMPLE}$  to obtain the practical timing value for a memory chip's access cycle. Likewise, bus and decoder delays effectively reduce a device's access time ( $t_{AC}$ ).

Although the dual-port prototype described in this article utilizes a Texas Instruments TM 990 format card, the design works with virtually any CPU system whose access-time requirements exceed 330 nsec. The TM 990 8k-byte card contains 70-nsec 4k-bit static RAM chips. Allowing for worst-case input-latch propagation delays and output-latch setup times, a memory cycle executes in less than 95 nsec—and at room temperature, as fast as 83 nsec. Because three memory cycles are needed for one Read cycle, a 250-nsec CPU access time results. To assure safe operation over a wide temperature range with worst-case devices, however, and to accommodate commonly available oscillator crystals, this design employs 110-nsec memory cycles to obtain a  $t_{AC}$  of 330 nsec—fast enough to handle most  $\mu$ Ps.

Because the multiport oscillator frequency depends on  $t_{AC}$ , the sampling rate becomes 1 cycle per 110 nsec or 9 MHz. You can implement a 50% - duty - cycle system clock by dividing the output of an 18 - MHz oscillator by 2. To settle the input - latch data far in advance of clocking, the circuit's input multiplexers select each port 90° out of phase from the input sampling clock. This key timing innovation realizes a simple, CPU-independent dual-port memory design.

### Memory card handles diverse applications

In a straightforward processor-to-memory dual-port application, you connect the 8k-byte memory card's

### Traditional memory-sharing techniques

Commonly employed dual-port techniques severely limit the performance of the two devices sharing memory. For example, one dual-port technique (prioritized access) multiplexes the two devices' address, control and data buses by assigning priorities. When the high-priority device accesses the shared memory, it always gets control of the multiplexer. Meanwhile, the low-priority device idles until the high-priority device releases memory control.

Low-cost CRT display terminals employ prioritized-access arrangements that allow the high-priority CPU to control the low-priority video-refresh logic. Unfortunately, though, when a CPU request overrides the video logic

during character readings, random glitches appear on the screen. A CPU request during video blanking, however, prevents these glitches. Because glitches and access limitations restrict performance, high-cost graphics displays rely on a dedicated CPU or employ a local CPU for synchronous dual-port operation.

A second common dual-port technique (arbitrated access) utilizes arbitration logic to determine which of two devices needs memory service first. This logic provides Ready/Wait signals to the devices to avoid conflicts between access requests. But because some processors and peripherals can't enter a Wait state, the arbitrated-access meth-

od doesn't suit many memory-sharing applications. (In an exception, though, clever design of an arbitrated dual port on the Intel iSBC 86/12 permits two CPUs to access one memory with a maximum of one Wait state.)

A third traditional dual-port technique (synchronous access) enables two CPUs to generate concurrent requests for shared memory in a complicated timing arrangement. This approach is device dependent, however—only a few  $\mu$ Ps, such as the 6800 and 6502, exhibit suitable timing parameters. These  $\mu$ Ps furnish fixed periodic intervals during which memory access cannot take place—thus permitting interleaved memory sharing.



port A (P<sub>1</sub> connector) to a TM 990 CPU bus (Fig 3a). The uncommitted port B interfaces through the 40-pin P<sub>4</sub> connector.

You can configure ports A and B for 8- or 16-bit operation as either byte- or word-organized memory. Address decoders for both ports allow memory mapping at any 8k-byte boundary in the 64k address space, and because the decoders perform independently, the same information block can appear at different locations.

Three 990 CPU output signals direct each port's operation: Memory Enable indicates that a valid memory address is currently available, Write Enable strobes data into shared memory and Data Bus In specifies the direction in which data can flow through the dual-port data-bus buffers. Assure CPU independence by disconnecting all processor-dependent timing signals, such as Memory Ready and Wait State Indicator.


To reduce transmission-line effects, terminate all port-B lines. Use a ground-shield cable to connect port B to device B if the cable distance exceeds 12 in. And if you must connect port B to another system's bus, insert bus buffers to isolate the extension cable from device B's system bus.

### Adapt to processor-to-processor applications

Another dual-port-memory configuration implements a high-speed communications link between two processors. For this link, you add a TMS 9900 peripheral processor to the 8k-byte dual-port memory card (Fig 3b); connector P<sub>3</sub> joins this processor to memory port B (P<sub>4</sub>). Support parts for this application include a 9904 clock driver, a 9902 asynchronous communications controller and a pair of 2516 2k×8 EPROMs.

In this configuration, the peripheral processor uses the dual-port memory for both workspace area and communications to an off-board backplane CPU via full interrupt handshaking. The backplane CPU sets interrupt requests to the peripheral processor by writing to one of the last 16 words in dual-port memory. Likewise, this CPU acknowledges interrupts from the peripheral processor by writing to one of the eight next-to-last words in dual-port memory. The backplane CPU's IORESET signal holds the peripheral processor in the Reset mode; writing to one of the last 16 words in shared memory releases the processor. This interrupt handshaking technique eliminates the requirement for a separate I/O interface to the backplane CPU.

Yet another asynchronous-sampling memory application connects an off-board CRT graphics-display system to the 8k-byte dual-port card. An off-board TM 990/100M CPU creates and processes images in screen memory via port A without causing display glitches. Independently of CPU operation, the graphics system constantly reads 256×256-pixel displays out of port B, into a 74LS166 output shift register and then to the CRT screen. A 9927 video timing controller scans port B and provides TV synchronizing and blanking signals.

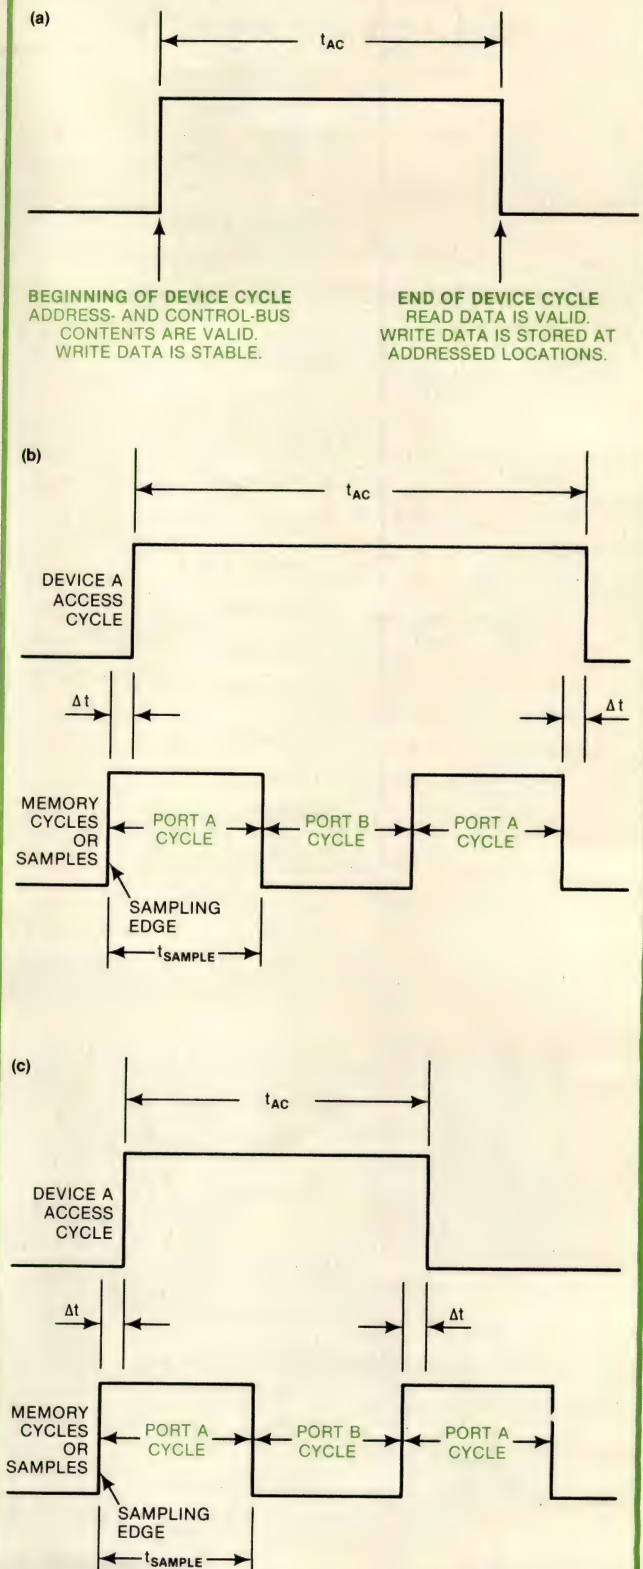

**Fig 2—Clock timing for an asynchronous-sampling dual-port memory involves three steps: establishing memory access as a simple Start/End sequence,  $t_{AC}$  (a), squeezing two port-A cycles into device A's Read cycle to guarantee a complete asynchronous memory cycle (b) and requiring only one sampling-clock leading edge for device A's Write cycle, because the input latches allow memory Write cycles to complete independently of the attached device (c).**



## Asynchronous sampling achieves a nearly ideal multiport memory

An assembly-language graphics program manipulates the display memory. This software executes elementary commands (such as Draw Line, Draw Box and Draw Character) at a specified location. Attached to the graphics CPU's serial link, a second off-board CPU executing Power BASIC allows graphics development in a high-level language.

Still other asynchronous-sampling dual-port-memory applications include:


- Implementation as a buffer between a CPU and a mass-storage controller for, say, a disc system; this arrangement's reliability exceeds that of DMA approaches because the dual-port memory isolates the system bus from the disc-controller CPU.
- Configuration as a key part of a software-development system in which a host CPU edits, assembles and links prototype programs; after the final object code is stored in dual-port memory, the emulator CPU debugs the software.

In this manner, a catastrophic program bug cannot crash the host CPU.


- Use as a data-rate buffer between a high-speed ADC and a CPU; unlike traditional DMA buffering schemes, the ADC and CPU subsystems need not compete for memory access. **EDN**

### Author's biography

**Robert W Schmidt**, a micro-processor systems designer at Texas Instruments, Houston, when this article was written, now works as a design engineer at the Public Broadcasting Service, Washington, DC. He holds a patent on a 16-bit memory system and counts home computing among his hobbies. (Bob rented his computer and graphics system to a TV station for election-returns reporting in 1976.)



**Article Interest Quotient (Circle One)**  
**High 485 Medium 486 Low 487**

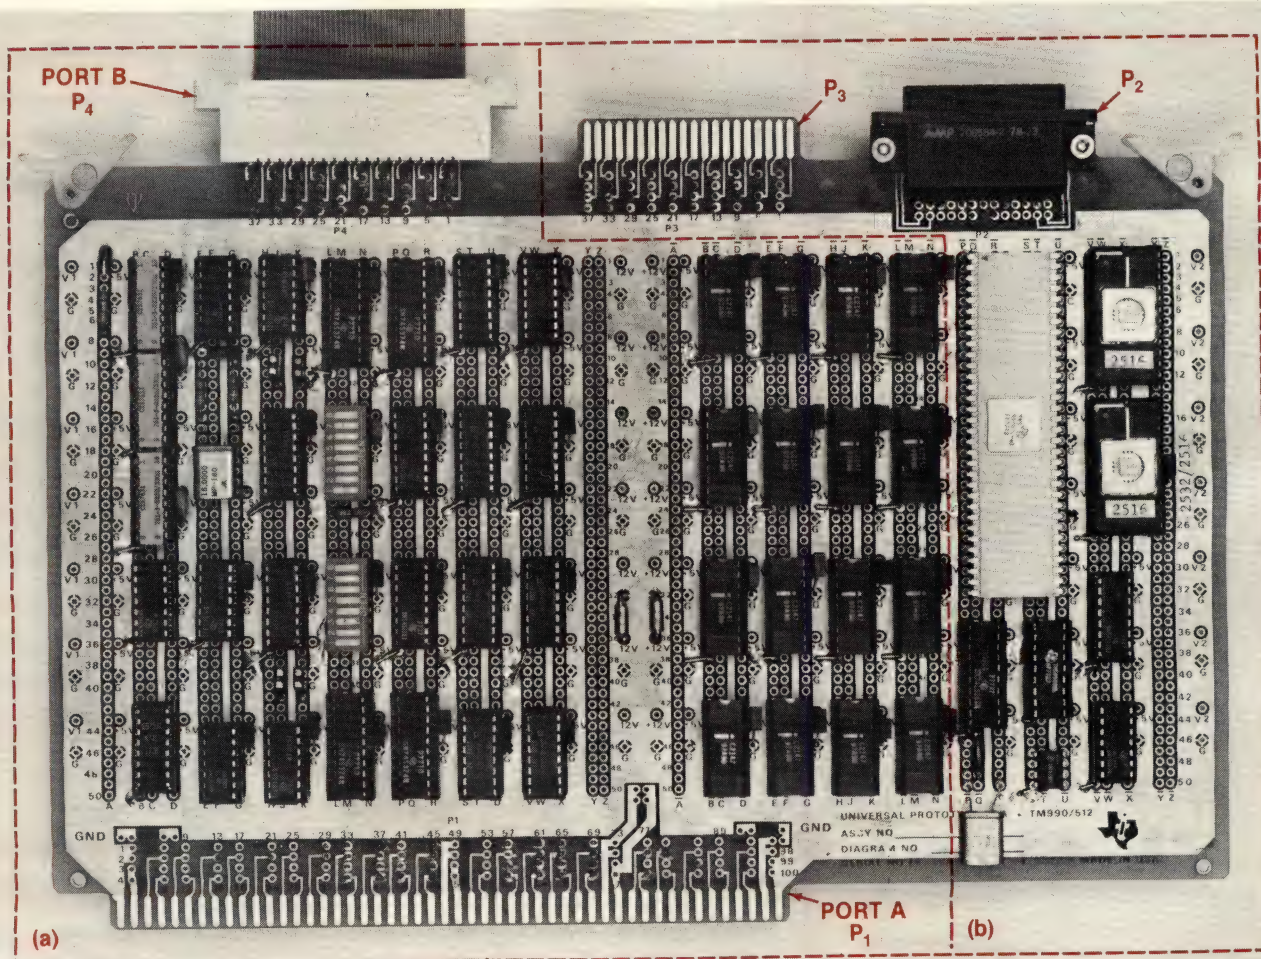

**Fig 3—An asynchronous-sampling 8k-byte dual-port memory card** (designed in this case for a Texas Instruments TM 990 computer system) serves varied applications: as a stand-alone asynchronous-sampling memory with ports at P<sub>1</sub> and P<sub>4</sub> (a) and as a multiprocessor system with an on-board peripheral processor interacting with an off-board backplane CPU (b).



Solid State Scientific

# Custom LSI



Name	_____
Title	_____
Address	_____
Phone	_____ Ext. _____
My Application is	_____
Preferred Technology	_____

EDN 4/20 Custom

### Custom ICs can save you money.

98% of our customers save money with our custom MOS/LSI circuits. That's why they come to us. They save with higher reliability, reduced labor and materials costs, reduced problems at the board and system level, fewer parts and lower warranty costs. If you want savings like this—give us a call.

**Our track record is proven.** Whether your application requires long battery life, high packing density, high noise immunity or high speed, our design/production team can fill that need. We produce on time—within budget. And you will not have to muddle in big company bureaucracy. You talk to the design engineers at every stage of production. With our tight, independent quality assurance program, we build in reliability everytime—and deliver it on time.

**Want to know more?** Send in the above coupon to Solid State Scientific, Montgomeryville, PA 18936, or call 215-855-8400, ext. 274.




## Solid State Scientific



# HERE AT LAST!

## A Standard "Custom" Data Collection Device

### The Memodyne M80 Cassette Computer

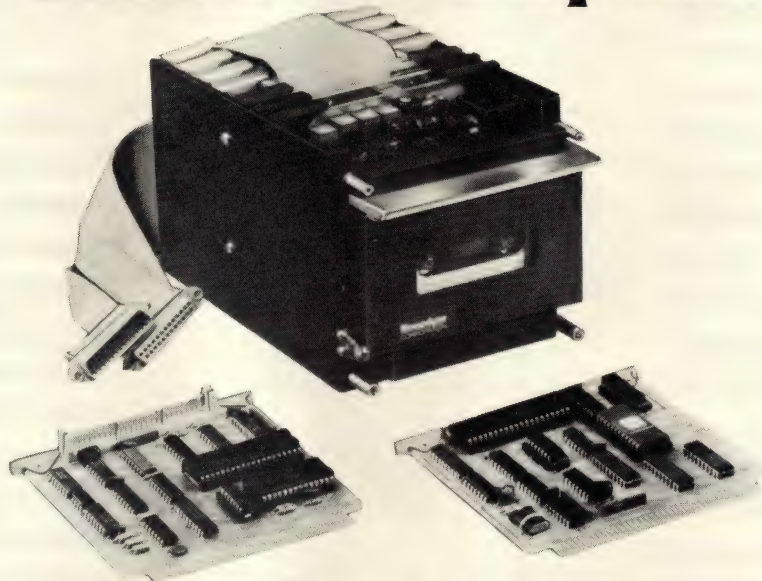

The M80 is a general purpose Z80™ based computer combined with a rugged, high-speed digital cassette drive in a compact, panel mounting module. Modem and terminal RS232C and TTY current-loop serial ports are provided for easy interfacing. A 2K PROM is programmed to implement completely interrupt driven control of the recorder and communications functions. A 1K RAM provides data buffering which allows the M80 to handle continuous streams of data up to 9600 BAUD.

T.M. Z80 is a trademark of ZILOG Corp.

#### FEATURES:

- Standard program in CPU Card Prom implements 30 recorder and communication commands plus numerous mode selections.
- A Microprocessor based computer that is small and compact, a rugged module that can operate in hostile environments with its own removeable medium memory, immune to hazards that disable disks, printers, and other peripherals.
- High speed: Can read or write continuous data streams at up to 9600 Baud with block size of 100 bytes or more.
- 500,000 Byte formatted capacity.
- ANSI/ECMA-34 compatible tapes, both tracks accessed.
- Programmable block size up to 256 Bytes.
- Recorder control and communications are interrupt driven and transparent to user programs.
- Small cards make for sensible modularity with modern high density ICs and are easily inserted and extracted.
- Small module fits behind standard 5 inch panel.

#### IF YOU NEED:

1. A Process Control Computer.
2. A Computing Data Logger.
3. A Custom Cassette Recorder.
4. An Airborne Recording Computer.
5. The Highest Speed RS232C Cassette Recorder.
6. A Medical Data Acquisition System.
7. A Numerical Controller.
8. An Intelligent Cassette Terminal.
9. An Analytical Instrumentation Recorder.
10. An Automatic Tester.

... An application we haven't thought of ...

**THEN ALL YOU HAVE TO DO  
IS PROGRAM OUR PROM  
(AND IF YOU DON'T WANT TO  
WE WILL).**

WRITE FOR COMPLETE DETAILS INCLUDING  
COLOR BROCHURE TO:

**Memodyne**  
CORPORATION

220 RESERVOIR STREET  
NEEDHAM HEIGHTS, MA 02194 U.S.A.  
TELEPHONE (617) 444-7000  
TELEX 922537



# WRESTLING WITH COMPONENT DESIGN AND APPLICATION? LOOK TO STACKPOLE FOR HELP

If you think of Stackpole as just another source of electronic components and materials, you're overlooking one of our most important products. Help.

**Stackpole can help** with your stickiest design and application problems. For example, we can help simplify manufacturing with our enclosed, modular switches. Or can help save board space by squeezing more resistance into smaller thick-film networks. And we can help you meet deadlines, with full stocks and very competitive lead times, even on custom configurations. All this at prices that help you stay competitive.

**For over 70 years**, we've been deeply involved in electronic design, product engineering and materials application. As our "Stackpole" shows, our components and materials are used by a wide variety of leading electronic manufacturers. So, the next time you're wrestling with a problem in one of these product areas, look to Stackpole.

**Switches:** slide, rotary, rocker and key-switches; keyboards and custom switches. **Resistors:** fixed-composition, carbon-film, metal-film and special-purpose resistors; thick-film resistor networks. **Ferrites:** ceramic permanent magnets, magnetizable powders and soft ferrite cores. **Get to know Stackpole better.** Write for our new brochure, or call Dauer Stackpole Corporate Marketing Manager, Stackpole Carbon Company, St. Marys, Pa. 15857. Phone: (814)-781-1234.



## STACKPOLE

Get to know us. We can help.





# CREATIVE SOLUTIONS...FROM SAM'S.

How can you do it better, faster, less expensively? Sams technical books can help you find creative solutions. Stay abreast of changing technology. Find out what is new, and how to use it. Share ideas with some of the leading experts in the fields of electronics and computers. Get information and reference data you can use today... and knowledge you can apply tomorrow.

## LANCASTER'S COOKBOOK LIBRARY ... SAVE 15%!

Three electronics classics by Don Lancaster—one of the most popular authors in electronics. Get Lancaster's insights into what makes TTLs, CMOS, and active filters cook—what they are, how they work, and how to apply them.

TTL Cookbook #21035	\$ 9.50
CMOS Cookbook #21398	10.50
Active-Filter Cookbook #21168	14.95
<b>TOTAL LIST PRICE</b>	<b>\$34.95</b>
Less 15% Discount	5.24
<b>YOU PAY ONLY</b>	<b>\$ 29.71</b>

**ORDER SPECIAL LIBRARY PACKAGE #21707 FROM YOUR SAMS DISTRIBUTOR OR BOOKSTORE ... AND SAVE 15%!**

## JUNG'S COOKBOOK LIBRARY ... SAVE 15%!

Everything you want to know about IC converters, op-amps, and timers—from fundamentals to practical circuit applications. Written by Walter G. Jung—a specialist in IC applications.

IC Converter Cookbook #21527	\$13.95
IC Op-Amp Cookbook #20969	12.95
IC Timer Cookbook #21416	9.95
<b>TOTAL LIST PRICE</b>	<b>\$36.85</b>
Less 15% Discount	5.52
<b>YOU PAY ONLY</b>	<b>\$ 31.33</b>

**ORDER SPECIAL LIBRARY PACKAGE #21704 FROM YOUR SAMS DISTRIBUTOR OR BOOKSTORE ... AND SAVE 15%!**

## PNEUMATIC AND ELECTRONIC INSTRUMENT TRAINING COURSE. BIG 2-VOLUME LIBRARY!

*Volume 1—Pneumatic Instruments—* Covers theory, construction, alignment, installation, and operation of many types of pneumatic control instruments. Explains basic principles of link/lever mechanisms, pressure-sensitive devices, liquid level measurements, and flow measurement. #21579 \$13.95

*Volume 2—Electronic Instruments—* Covers electronic theory in a qualitative way for industrial instrumentation technicians. Explains four major aspects of electronic control: measurement circuits and primary devices; transistor electronics; vacuum-tube electronics, and magnetics. #21580 \$11.95

**ORDER THE 2-VOLUME SET #21581 FOR ONLY \$24.95 FROM YOUR SAMS DISTRIBUTOR OR BOOKSTORE.**

## STATE-OF-THE-ART TECHNOLOGY... JUST RELEASED!

*VMOS—Design of VMOS Circuits, With Experiments—* By Robert T. Stone and Howard M. Berlin. VMOS could be a giant step towards the ideal active filter circuit. You could be a giant step ahead by reading this book and studying the experiments that demonstrate the VMOS concept. **ORDER Design of VMOS Circuits #21686 FROM YOUR SAMS DISTRIBUTOR OR BOOKSTORE ... ONLY \$8.95**

## BERLIN'S CIRCUIT DESIGN LIBRARY ... SAVE 15%!

If you're involved in circuit design, this 4-volume set is a must for your library. Written by Howard M. Berlin—a well-known electrical engineer and educator.

Design of Active Filters, With Experiments #21539	\$ 7.95
Design of Op-Amp Circuits, With Experiments #21537	7.95
Design of Phase-Locked Loop Circuits, With Experiments #21545	8.95
555 Timer Applications Sourcebook, With Experiments #21538	5.95
<b>TOTAL LIST PRICE</b>	<b>\$30.80</b>
Less 15% Discount	4.62
<b>YOU PAY ONLY</b>	<b>\$ 26.18</b>

**ORDER SPECIAL LIBRARY PACKAGE #21708 FROM YOUR SAMS DISTRIBUTOR OR BOOKSTORE ... AND SAVE 15%!**

## INDUSTRIAL ELECTRICAL SYSTEMS LIBRARY ... SAVE 15%!

A complete course—comprehensive text and practical lab manual—that gives you a total picture of modern industrial electrical systems.

Industrial Electrical Systems #21446	\$ 11.95
Experimenting with Industrial Electrical Systems #21473	11.95
<b>TOTAL LIST PRICE</b>	<b>\$23.90</b>
Less 15% Discount	3.58
<b>YOU PAY ONLY</b>	<b>\$20.32</b>

**ORDER SPECIAL LIBRARY PACKAGE #21709 FROM YOUR SAMS DISTRIBUTOR OR BOOKSTORE ... AND SAVE 15%!**

## INDUSTRIAL ELECTRONIC SYSTEMS LIBRARY... SAVE 15%!

Fully explores industrial electronic devices, circuits and systems.

Industrial Electronic Systems #21453	\$ 11.95
Experimenting with Industrial Electronics Systems #21472	11.95
<b>TOTAL LIST PRICE</b>	<b>\$23.90</b>
Less 15% Discount	3.58
<b>YOU PAY ONLY</b>	<b>\$20.32</b>

**ORDER SPECIAL LIBRARY PACKAGE #21710 FROM YOUR SAMS DISTRIBUTOR OR BOOKSTORE ... AND SAVE 15%!**

## CUSTOMIZED TECHNICAL BOOKS

Sams has over 300 titles that can be customized for your use as gifts, incentives and goodwill builders... or Sams will write and publish a completely new book on any electronic subject you select.

**FOR MORE INFORMATION, CONTACT HOWARD W. SAM'S.**

## CUSTOMIZED PUBLISHING

Cross-reference guides... service and instruction manuals... price lists... Sams can do it all from writing to publishing. Our complete in-house capabilities—highly qualified technical staff, vast electronics data bank, and complete production facilities—offer you a way to get your custom literature done fast and inexpensively.

**FOR MORE INFORMATION, CONTACT HOWARD W. SAM'S.**

**SEE IT ALL AT  
ELECTRO/80  
VISIT  
SAMS BOOTH #3004-6**

## Howard W. Sams & Co., Inc.

4300 W. 62nd Street, Indianapolis, Indiana 46206

All books are available from Sams Distributors, Bookstores, and Computer Stores.

AD006

For more information, Circle No 139



# Circuit-design approach improves transistor reliability

*Designs based on the Ebers-Moll amplifier model yield reduced power dissipation and lower circuit voltage—with little or no output-power reduction—through proper use of device transconductance and voltage gain.*

**Keats A Pullen Jr, US Army**

Transistor reliability continually presents problems that designers typically blame on inadequate or underspecified devices but that a change in circuit-design methodology can solve. Although improved device fabrication and circuit integration have deemphasized discrete-circuit design considerations, these factors are still important. Re-examining circuit fundamentals helps you avoid some pitfalls of traditional design methods, such as the attempt to use the maximum voltages consistent with device specs.

Present bipolar-transistor circuit-design procedures, based on the matched-impedance method, generally focus on transistor current gain ( $\beta$ ), ignoring stage voltage gain for the most part (Ref 1). Disadvantages of this approach include possible selection of a high supply voltage, leading to excessive power dissipation and an incipient runaway condition; voltage gains in excess of 10 to 20 per stage, leading to phase instability; excess phase shift and oscillation; and dependence (through  $\beta$ ) on a derivative with respect to a small difference between two large numbers: the collector and emitter current values.

## **New method reduces $\beta$ effects**

You can eliminate these disadvantages through an approach to circuit optimization that greatly reduces the importance of  $\beta$ . This method, based on transconductance, permits lower circuit voltages with at most a slight reduction in power output, improves circuit stability and increases reliability. The resulting reduction in power dissipation in turn reduces the required amount of cooling, facilitates the sealing of circuitry from dirt and moisture and extends battery life in portable designs.

Understanding this method begins with a consideration of amplifier representation by means of the

Ebers-Moll equations (Ref 2), which lead to a derivation for amplifier voltage gain (Ref 3). You can calculate this gain for the simplest resulting circuit from the equation

$$K_v = -\kappa \Lambda I_C Z_L \quad (1)$$

where  $\kappa$  is transconductance-per-unit-current efficiency,  $\Lambda$  is  $q/kT$ ,  $I_C$  denotes collector current and  $Z_L$  represents load impedance. With bipolar transistors, the value of  $\kappa$  approaches 1, and the value of  $\Lambda$  equals 39 siemens/A. Neither of these parameters is a function of  $\beta$ , and neither depends sensitively on small differences between large numbers or on minority-carrier lifetime. The only restriction on  $\beta$  is that it be greater than a specified minimum value (such as 10).

Based on  $\kappa$ , the approximate value of collector supply voltage required to achieve proper amplifier operation in the common-emitter mode is given by this equation (Ref 1):

$$V_{CC} \approx 1V/\kappa, \quad (2)$$

while a common-base-configured amplifier requires a voltage of

$$V_{CC} \approx 7.5V/\kappa. \quad (3)$$

These equations also apply to FETs and electron tubes.

Now recall that a high  $\kappa$  value severely limits the power-handling ability of a bipolar transistor when employed as an RF amplifier, even in the common-base configuration. This limitation's effect frequently appears in practical circuits, but its cause is not always recognized.

To illustrate the point, consider a common-base RF amplifier. Here, an emitter-to-collector voltage gain of 75 to 100 yields a stable overall gain of 10 for properly configured circuits. For a peak collector current of 20A, the forward (intrinsic) admittance reaches 750S, calling for a maximum tuned impedance (loaded) of 0.1 $\Omega$ .



## Transconductance-based designs improve on traditional methods

Consequently, an output circuit must transform load impedances between 0.1 and 50Ω. A peak power input of 200W with a collector supply of 10V calls for a tuned loaded impedance of 0.4Ω, if you can tolerate a voltage gain of 300. The resulting input power of 100W makes 50 to 60W available (unless you achieve internal stabilization through emitter resistance), as observed in practice.

Accordingly, the circuit should be designed (via the transconductance method) in a manner potentially least destructive to the device rather than to achieve the maximum input power theoretically possible (through the matched-impedance method), because the stable output power available differs only slightly in either case.

### Check supply-voltage requirements

Now consider some related design factors. First, examine whether the transconductance method's reduced collector voltage allows sufficient signal drive for the next stage. From Eq 2, a  $\kappa$  of approximately 1 (as for a bipolar transistor) requires a supply voltage only 1V greater than the device saturation voltage. With bipolar transistors, as with simple diodes, a 200-mV change applied across the input junction causes a more than 2000-fold change in device current. So long as the voltage from collector to emitter exceeds the saturation voltage by even a few hundred millivolts, the transistor amplifies as well in most applications as it would with 5 or 10V applied.

Second, note that the traditional method's use of higher voltages requires a high value of  $Z_L$  for impedance matching. In either approach, limitation of stage voltage gain (typical military and commercial RF and IF linear amplifiers usually include one stage per decade of voltage gain) to assure stability requires limiting the effective value of  $Z_L$ —sometimes intentionally but often accidentally—either at the design stage or in the final circuit. While the transconductance approach inherently provides a reduced  $Z_L$ , matched-impedance designs depend on input loading from a following stage to reduce the voltage gain from as much as 1000 to a safe value of 10 to 20.

Also consider the effect of  $\beta$  on circuit performance. Inserting a super- $\beta$  transistor into a traditional circuit can cause circuit oscillations incorrectly blamed on the transistor. Transconductance-based designs incorporate a lower impedance output circuit having the proper Q value, allowing operation with any transistor having a  $\beta$  greater than 5 or 10 and sufficient alpha cutoff frequency. In addition, such circuits have the intended amount of gain, because each stage is designed to use a stabilized level of output current and the appropriate level of impedance, with gain unaffected even by a nuclear event so long as the postevent  $\beta$  exceeds a

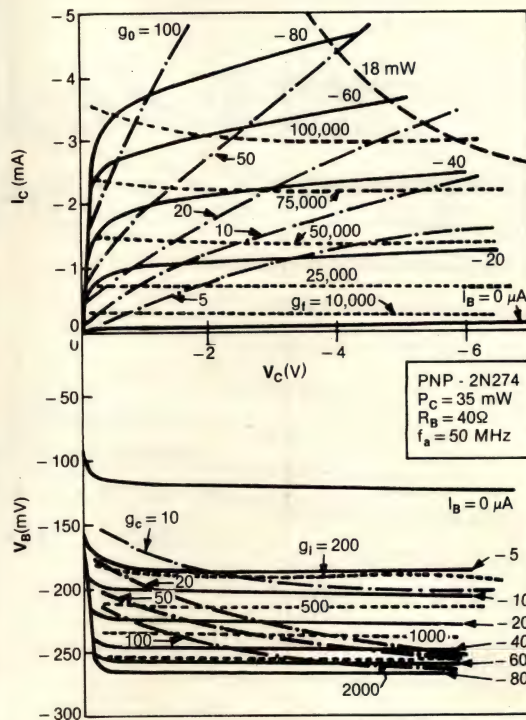


Fig 1—Typical transistor augmented curves illustrate data used in the design examples outlined in this article.

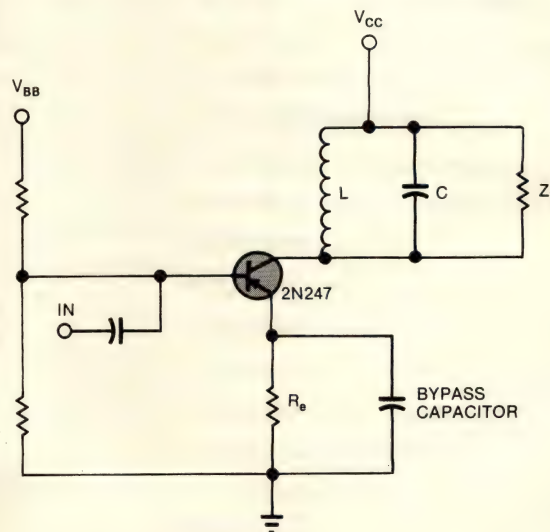


Fig 2—Design of an IF/RF amplifier circuit illustrates the benefits of the transconductance design technique.

TABLE 1 — DESIGN-DATA COMPARISON

PARAMETER	CASE 1	CASE 2
$V_{CC}$	1V	10V
$Z_L$	25Ω	1000Ω
$I_b$	<500 μA	<500 μA
$R_e$	5Ω (BYPASSED)	5Ω (BYPASSED)
$X_L$	0.25Ω	10Ω
$X_C$	0.25Ω	10Ω
L	0.004 μH	0.16 μH
C	64,000 pF	1600 pF
UNLOADED $K_v$	10	400
LOADED BANDWIDTH	1 × DESIGN BANDWIDTH	40 × DESIGN BANDWIDTH
POWER INPUT	10 mW	100 mW
TEMPERATURE RISE	4.7°C	47°C



selected design minimum. (Wire-wound decoupling resistors help protect active devices, which can look like short circuits during nuclear events.)

### Base your design on the proper procedure

The transconductance design procedure for discrete-transistor amplifier circuits should follow these steps:

- Selection of the desired output load impedance
- Selection of the desired output current
- Design of the bias circuit to provide the output current
- Selection of the appropriate base supply voltage
- Selection of the appropriate collector supply voltage
- Design of the linear networks for use with the device.

After completion of the first three steps, select the supply voltages, keeping in mind that the base supply, with 10V typically available, must provide less than a tenth as much current as the collector supply, which in turn must supply only a tenth to a fifth as much voltage as the base supply. This consideration results in a 50 to 75% reduction in the total net power required with normal design procedures. The supplies require good filtering but need little if any special regulation. Thus, the two supplies called for in the transconductance method need not cost more than a traditional circuit's single supply, and the benefits resulting from better circuit operation, less required cooling and improved reliability are free.

Actual values for input-signal voltage and output-circuit supply voltage depend on the transconductance efficiency, which you should select based on application considerations. Where maximum separation of signal from noise is required, use devices with the maximum possible  $\kappa$ , because this approach provides the maximum transconductance and gain for any current level. (Noise level is highly current dependent. Note, however, that space-charge effects help minimize noise with both electron tubes and FETs.)

On the other hand, maximum power-output requirements dictate the use of devices with reduced  $\kappa$  values. In fact, you will find that with most high-power 2-port electron tubes, the recommended control-supply-voltage value falls within a factor of two of that defined by Eq 2.

### Examples contrast design methods

The design benefits of the transconductance technique stand out with respect to the traditional matched-impedance method, as an example illustrates. Consider the design of a 10.7-MHz IF amplifier with an overall stage gain of 10 by use of the transconductance technique (Case 1) and the matched-impedance method (Case 2). Assume collector current of 10 mA, base voltage of 10V,  $\beta$  greater than 20, a desired  $K_v$  of 10 and loaded  $Q$  of 100. The typical device curves appear in Fig 1, the circuit configuration in Fig 2 and the design results in Table 1. Note the collector supply voltage of

1V for Case 1 and 10V for Case 2 and the corresponding input power requirements. Had a 40-mA collector current been selected, the power input for the two cases would have been 42 and 402 mW, respectively, leading to a significant overload in Case 2.

Although the design values for  $L$  and  $C$  for Case 1 appear difficult to obtain, the tuned circuit can employ a tapped coil, with the inductance to the tap as the rated value. Then you can increase the overall inductance by four or more times and correspondingly reduce the capacitance.

Clearcut advantages result from the use of the transconductance method in this example and in general:

- Loading from the following amplifier has a negligible effect on the stage gain and bandwidth so long as the minimum  $\beta$  is high enough (20 is usually sufficient) to make the input impedance of the following stage large compared with 25 $\Omega$ . This impedance would probably not be near 1000 $\Omega$ , as is required by Case 2.
- Power input to the collector circuit is reduced to one-tenth that required for Case 2, making possible substantial increases in MTBF (Ref 4).
- Little danger of either oscillation or phase instability occurs, given good layout practice.
- The characteristics of the transistor in the following amplifier have little effect on the stage designed.
- The circuit's reduced overall impedance level, even with use of the tapped-coil arrangement, makes the impedance transformation required with common-base configurations substantially easier to obtain.
- The technique alleviates circuit problems arising from a little-known relation between tuned-circuit  $Q$  and step-down ratio in systems employing a tapped-capacitor-tuned transformer.

TABLE 2 — 2-STAGE AMPLIFIER DESIGN DATA

PARAMETER	STAGE 1	STAGE 2
$Z_L$	25 $\Omega$	2.5 $\Omega$
$I_b$	<100 $\mu$ A	<1000 $\mu$ A
$R_o$	25 $\Omega$ (BYPASSED)	2.5 $\Omega$ (BYPASSED)
$X_L$	1 $\Omega$	0.1 $\Omega$
$X_C$	1 $\Omega$	0.1 $\Omega$
EFFECTIVE $L$	16 nH	1.6 nH
EFFECTIVE $C$	1280 pF	12,800 pF
MINIMUM STAGE $\beta$	25	25
POWER INPUT	4 mW	40 mW

Another example illustrates the use of the transconductance technique to build up the power level of an RF source. Assume a 2-stage design of a 25-MHz amplifier; let the voltage gain for each stage be 2, with the input signal starting at 10 mV. Use first- and second-stage collector currents of 2 and 20 mA. Choose a  $Q$  value of 25 for the loaded tuned circuits and a  $V_{CC}$  of 2V. Table 2 summarizes the results, which show a requirement for tapped coils or transmission lines and demonstrate the difficulty of designing adequate parallel-tuned circuits for very high-frequency transistor amplifiers. Where



## Lowered power-supply voltages still permit adequate gain

possible, then, use series-tuned circuits.

This amplifier yields a 40-mV output, and the variation in voltage gain of an amplifier following the second stage would be about 4:1. (The third stage would approach Class C operation—see **box**, "Notes on Class C amplifier design.") The signal-frequency current available from the collector of the second stage in this semipower-amplifier arrangement can reach 7 mA rms or more. So long as the minimum required  $\beta$  is available, stable operation in the designed mode is achievable.

## Technique simplifies analysis

The transconductance technique also serves other applications. Because transconductance as a function of device current is readily available (from **Eq 1**) in terms of  $I_C$ , calculation of the properties of nonlinear circuits, including frequency multipliers, mixers and switching circuits, proves relatively straightforward (**Ref 5**).

Important consequences of the transconductance design approach include academically simple analysis of solid-state-device characteristics and ease of circuit optimization, as well as improved performance and reliability. You need only watch a circuit fail from excessive dissipation to appreciate the benefits. **EDN**

---

### Article Interest Quotient (Circle One)

High 488 Medium 489 Low 490

---

## Notes on Class C amplifier design

Traditional design of transistorized RF power amplifiers involves the use of a collector supply voltage as high as device second breakdown and fundamental breakdown will permit. The following analysis evaluates the validity of this practice.

Any amplifier is to some extent a feedback amplifier, and its operating equation therefore assumes the simplified form:

$$K = K_v / (1 - K_f K_v)$$

where  $K$  is the overall voltage amplification,  $K_v$  denotes the forward voltage amplification and  $K_f$  represents the amplification (much less than unity) for the amplifier feedback path. So long as the overall value of  $K$  as a function of frequency does not include a zero value for the denominator, the circuit should prove stable, but minimum-phase characteristics require that the  $K_f K_v$  magnitude be as small as possible.

Because of the assortment of stray inductances and capacitances in RF amplifier circuits, assume that if the magnitude of  $K_f K_v$  approaches unity, unstable conditions can occur and that the amplifier's phase transfer function will thus vary erratically with frequency. The existence of such excess phase shift is probably the

most sensitive indicator of a potentially unstable amplifier—one that might self-destruct.

Efficiency considerations require that amplifier power stages operate in the common-base configuration, which yields ratios of peak available energy taken from the tuned circuit to loss in the active device greater than 10:1. Alternative configurations, however, exhibit ratios as small as 2:1. The changeover point from the use of the common-emitter configuration to the common-base configuration is thus a critical point in power-amplifier circuit design—achieving adequate drive for the first common-base amplifier and assuring phase stability simultaneously can prove difficult.

With proper design and layout, it's possible to obtain stable operation in the common-emitter mode with input-to-output voltage gains of up to 10, and in the common-base mode with gains of approximately 100 (emitter to collector). Thus, the maximum feedback gain in the two cases typically cannot exceed either 0.01 or 0.001.

The feedback paths for transistors at high frequencies are complex, including intrinsic capacitances and various parasitic elements. This combination makes neutralization difficult, particularly

in the common-emitter mode. And this difficulty in turn makes the forward-voltage-gain limitation even more important; achieving such limitation is possible only by limiting the circuit impedance levels, particularly  $Z_L$ .

Theory shows that to obtain maximum effective bandwidth for a chain of amplifiers using discrete circuit elements in the presence of Miller-effect capacitance, stage voltage gains between 2 and 3 are optimum. In practice, though, other considerations might apply, with the result that voltage gains typically should not exceed 10 to 20 overall (input to input).


For efficient operation of a transistor in a Class C amplifier, collector-to-emitter voltage must be as small as possible during the current pulse that charges the circuit's frequency-determining components. The supply voltage then must be sufficient to produce this voltage at peak current with the allowed value of loaded tuned impedance.

When the operating load line for these conditions is established for a Class C amplifier, it appears somewhat like curve D in the **figure (Ref 5)**. The dotted section develops from energy exchange in the frequency-stabilizing circuit. The actual load contour starts



## Author's biography

**Keats A Pullen Jr** is an electronic research engineer in the Tactical Operations Analysis Office of the US Army Material Systems Activity, Aberdeen Proving Ground, MD. Holder of a BS in physics from Cal Tech and a Doctor of Engineering from Johns Hopkins University, he is a Life Fellow of the IEEE. Keats' hobbies include photography, computer science and ham radio. He says this article "represents the culmination of many years of effort to reduce temperature rise and increase MTBF of electronic hardware."



## References

1. Pullen, K A, "The Enhancement of Electronics Reliability Through the Use of Transconductance Efficiency," AMSAA Technical Memorandum No 123, 1972.
2. Middlebrook, R D, *An Introduction to Junction Transistor Theory*, John Wiley and Sons, New York, 1957.
3. Pullen, K A, *Design of Transistor Circuits with Experiments*, Howard W Sams & Co Inc, Indianapolis, IN, 1979.
4. Cooke, H P, "FETs and Bipolars Differ When the Going Gets Hot," *Microwaves*, February 1978, pgs 55-61.
5. Pullen, K A, *Reliable Military Electronics*, AMCP 706-124, 1976. Available from DDC or NTIS. An update of Pullen, K A, *Handbook of Transistor Circuit Design*, Prentice-Hall Inc, Englewood Cliffs, NJ, 1962.


initially through the  $V_{CC}$  point and within a number of cycles equal to Q essentially moves to the indicated location. (Strictly, an elliptic

load contour is generated, resulting in energy storage that proves vital in circuit operation.)

The direction of traversal of the elliptic load contour is indicated by the arrowheads on the graph. And as the coupling to the load tightens, the resistive axis of the load line shifts from A' to D' for an excess-voltage situation.

When the transistor amplifier operates near its maximum frequency ( $f_{max}$ ), it might prove necessary to increase the selected value of  $V_{CC}$  sufficiently to assure that the load contour is properly located with respect to existing  $f_{max}$  contours. This condition might indicate that the device chosen doesn't suit the intended application. Thus, where possible, avoid such a voltage boost.

The important point to note from the **figure** is that with matched impedances, the voltage gain in the power amplifier (as shown by C') quickly develops a maximum value so great that stability is no longer assured. As the impedance is reduced through loading to assure stability, the transistor power input increases, and the power output at the chosen output frequency might decrease simultaneously. The only way you can avoid this situation is by selecting a reduced value of collector supply voltage.

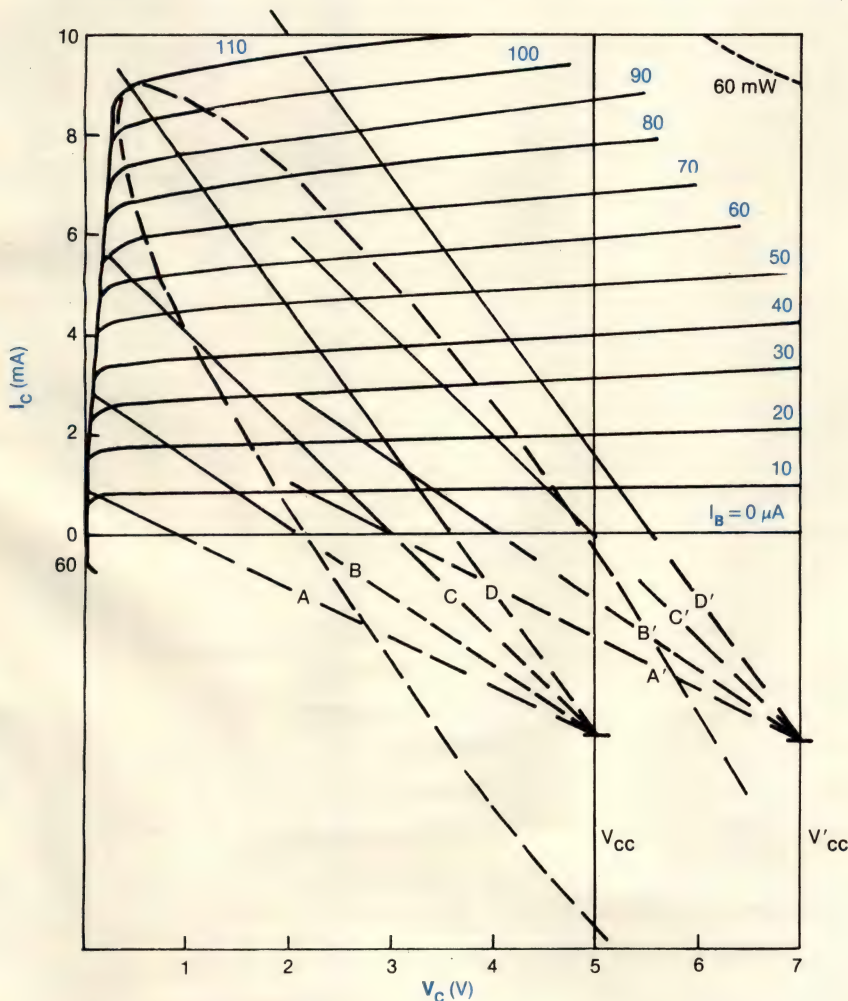

Operation-contour plot shows the load line for a Class C amplifier.







## ARINC 600. OUR EXCLUSIVE ENGAGEMENT CONTINUES.

Since rack and panel connectors were first devised, the ITT Cannon Electric name has been synonymous with technological leadership. And when the avionics industry called for a new design to meet the demands of modern technology, Cannon again held center-stage with the ARINC 600 connector series. Today, we're still the only manufacturer officially qualified to commercial avionics specifications.

Cannon's® low insertion force BKAD/E series connectors are available in environmental and non-environmental designs. Their contacts are fully interchangeable with our DPX series. And termination tooling is the same for easy retrofitting. You get greater reliability, easier maintenance and lower cost per mated line in a totally-installed system.

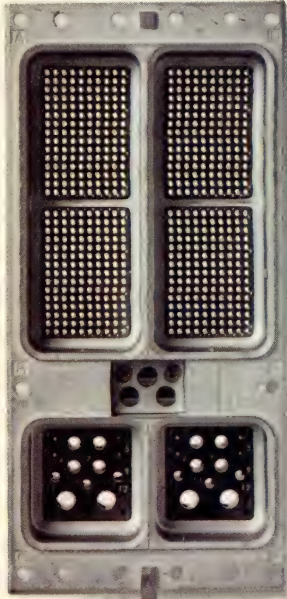

We have a good supply ready for delivery. And you can choose from a wide assortment of contact configurations. For immediate information refer to our pages in EEM. For literature, the name of your local ITT Cannon distributor or other information contact Rectangular Division Marketing Manager, ITT Cannon Electric, a Division of International Telephone and Telegraph Corporation, 666 E. Dyer Road, Santa Ana, California 92702. Telephone: (714) 557-4700. TWX: 910-595-1131. TELEX: 65-5358.




### CANNON ITT

You can always connect with Cannon.

For more information, Circle No 141



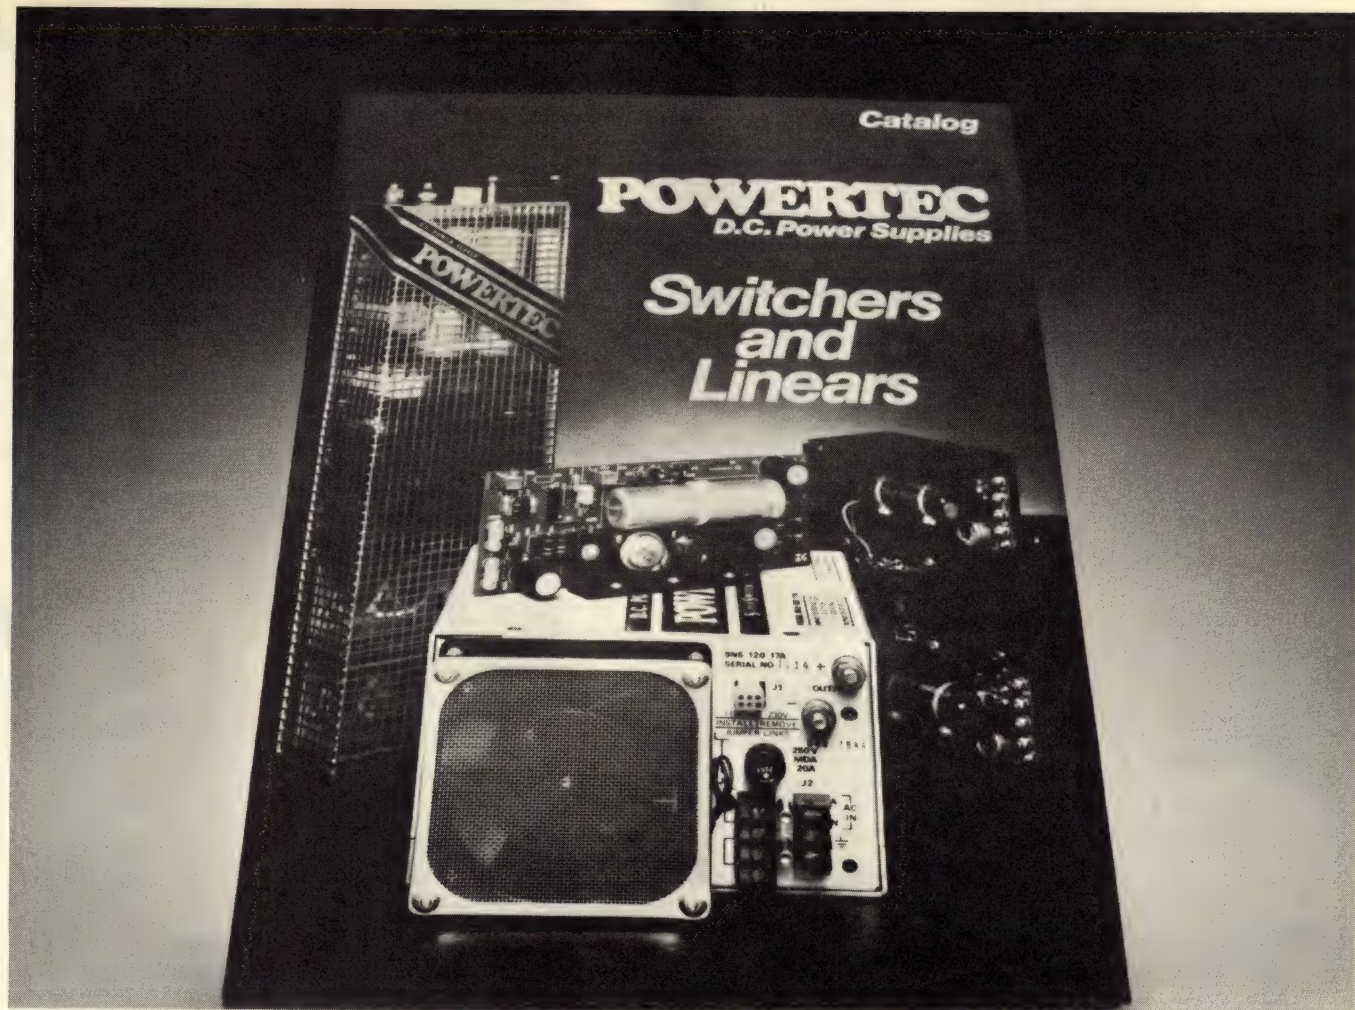

# The last word on power supplies.

What's new in power supplies is the news in Powertec's latest Catalog. It contains specs, features, descriptions, and diagrams of Powertec's complete line of switching and linear power supplies—our SuperSwitchers,<sup>™</sup> Sub-Modular Linears, OEM II series, and even specialized power supply units to give you an idea of our custom capabilities.

Our 9N SuperSwitcher series, for example, has designed-in safety features like UL recognition, overload protection, OVP, and thermal, reverse voltage and AC undervoltage protection. Our highly versatile SM Sub-Modular Series 22 and Series 25 give you build-your-own flexibility with multi-output voltage of 1.2V to 30V, up to 75A. And nobody can match the quality/

power/cost effectiveness of our OEM II series. Nobody.

Send for your new Powertec Short Form Catalog now—it's long on high quality, high technology power supplies from the people who started the whole thing. Powertec.

## Free.

☐ Send me your new Short Form Catalog. I'm interested in:  
☐ Switchers ☐ Linears ☐ Sub-Modules

Name \_\_\_\_\_

Mail Stop \_\_\_\_\_

Company Name \_\_\_\_\_

Address \_\_\_\_\_

City/State/Zip \_\_\_\_\_

EDN4

## POWERTEC

DC POWER SUPPLIES 20550 Nordhoff Street  
 Chatsworth, California 91311 (213) 882-0004



# JOIN OUR PANEL DISCUSSION



## (on how to save time and money on installation and maintenance).

Interested in cutting costs without sacrificing quality?

Certainly. Any smart designer is. And we're here to show you how.

With not one, but four different types of panel components.

All are designed to snap into the panel and eliminate the need for costly mounting hardware. All are designed to reduce installation and maintenance time. (And save you more money.)

You want specifics?

Take our low-profile fuseholder. Available in eight different colors, it snaps into the panel securely and simply. An attractive and convenient alternative to your standard black, rear-mount fuseholder.

Our momentary action switches and circuit breakers offer the same advantages.

Indicator lights? We have a wide range of snap-mount plastics that require no hardware! (Unique flex arms on our  $\frac{5}{16}$ " and  $\frac{1}{2}$ "

diameter units secure the light and protect it against shock and vibration.)

Now, are you ready to move ahead on cost-cutting without sacrificing a thing?

Call or write. And we'll send the appropriate catalogs.

Then our discussion can begin on a one-to-one basis.

**LITTELFUSE** SUBSIDIARY OF **Tracor**  
Des Plaines, IL 60016 • (312) 824-1188  
**is more than you think.**



# Article Index

## July — December 1979

Notes: D (Design Ideas); F (Design Features); M ( $\mu$ Computerist Corner);  
N (News); P (Feature Products, Editor's Choice)

### Circuit Design

- Active probe uses one op amp. Sept 5, pg 217 (D)
- ADC encodes stepper-motor position. Sept 20, pg 131 (D)
- Add-on Hold button ups phone convenience. Oct 20, pg 342 (D)
- Address peripherals with program counter. Aug 5, pg 129 (D)
- Alarm circuit avoids false triggers. Aug 5, pg 126 (D)
- An  $8 \times 8$  multiplier and 8-bit  $\mu$ P perform  $16 \times 16$ -bit multiplication. Nov 5, pg 147 (F)
- Analog design becomes software design with  $\mu$ P-based signal-processor chip. Sept 20, pg 142 (P)
- Bleepers, buzzers give your design a voice. Oct 20, pg 85 (N)
- Bypass supply loads with care for optimum transient response. Sept 20, pg 113 (F)
- Capable IC sensors compensate T/C cold junctions. Oct 5, pg 121 (F)
- Circuit controls phase digitally. Sept 20, pg 134 (D)
- Circuit controls 3-phase inverters. Nov 5, pg 157 (D)
- Circuit cuts relay power consumption. Nov 20, pg 229 (D)
- Circuit optimizes optical-switch biasing. Sept 20, pg 133 (D)
- Circuit provides variable gain and limiting. Oct 5, pg 153 (D)
- Circuit saves power in ac induction motors. Sept 5, pg 185 (F)
- Circuit varies oscillator duty cycle. Aug 5, pg 124 (D)
- Conductivity monitor uses one 747. Aug 5, pg 124 (D)
- Control  $\mu$ C-oscillator accuracy. Sept 5, pg 218 (D)
- Design memory boards for RAM/ROM/EPROM interchange. Aug 20, pg 100 (F)
- Designer's Guide to: IC voltage regulators—Part 1. Aug 20, pg 93 (F)
- Designer's Guide to: IC voltage regulators—Part 2. Sept 5, pg 199 (F)
- Don't court disaster in DTMF signaling systems. Nov 5, pg 136 (F)
- Don't neglect thermal concerns when specifying motor needs. Sept 20, pg 119 (F)
- Dual current-differencing amplifier permits high-frequency designs. Sept 20, pg 99 (F)
- Dual variable op-amp IC simplifies complex analog designs. Sept 5, pg 191 (F)
- Ease bubble-system design with a few basic guidelines. Aug 5, pg 87 (F)
- 8080 clock provides two phases. Aug 20, pg 125 (D)
- Frequency-synthesizer components ease the build-or-buy dilemma. Nov 20, pg 215 (F)
- Gated oscillator maintains frequency. Sept 5, pg 220 (D)
- Implement complex analog filters with a real-time signal processor. Nov 20, pg 171 (F)
- Interlaced video displays utilize low-cost CRT controllers. Sept 5, pg 207 (F)
- Latch circuit clears easily. Sept 20, pg 131 (D)
- Let your personal computer talk to test equipment. Aug 20, pg 118 (F)
- Line receiver provides self test. Aug 20, pg 129 (D)
- Load power sources for peak efficiency. Oct 5, pg 154 (D)
- Matched components calculate slew rate. Aug 5, pg 121 (D)
- Meter monitors telephone sound levels. Aug 5, pg 121 (D)
- Method yields TV-system envelope delay. Nov 20, pg 221 (D)
- Multifunction monitor/alarm ICs save money and design time. Aug 5, pg 45 (N)
- No guaranteed memory use for bubbles; fast memory, fixed storage loom brightest. Nov 5, pg 67 (N)
- Op amp reduces transformer droop. Oct 5, pg 153 (D)
- Predictive coding improves ADC performance. Oct 5, pg 137 (F)
- Presenting the answers to EDN's analog-design quiz. Oct 5, pg 145 (F)
- PROMs decode ASCII characters for segmented LED displays. Aug 5, pg 105 (F)
- Pulse generator simulates preamps. Aug 20, pg 129 (D)
- Reduce crosstalk errors in analog multiplexers. Oct 5, pg 103 (F)
- Relate noise figure to noise temperature. Nov 5, pg 158 (D)
- Reminder circuit saves car batteries. Sept 20, pg 138 (D)
- Replace exclusive ORs with resistors. Aug 5, pg 118 (D)
- Simple voltmeter monitors TTL supplies. Oct 20, pg 339 (D)
- Sort pulses in terms of their durations. Oct 20, pg 342 (D)
- Space-saving, low-cost prototype boards use insulation-displacement contacts. Sept 5, pg 227 (P)
- Switched-capacitor techniques implement effective IC filters. Nov 5, pg 103 (F)
- Test your analog-design IQ. Oct 5, pg 111 (F)
- The single-board- $\mu$ C alternative expands OEM design horizons. Oct 20, pg 256 (F)
- TI-59 program gives transient responses. Nov 20, pg 222 (D)
- Transient-voltage suppressors suit pc-board protection needs. Aug 20, pg 105 (F)
- Up/down counter can't overflow or underflow. Nov 5, pg 158 (D)
- Use an LVDT to construct a simple scale. Aug 5, pg 116 (D)
- Use EPROM 1-chip  $\mu$ Cs as effective 1-shot lab aids. Aug 5, pg 97 (F)
- User-trimmable resistor networks reduce circuit-design costs. Aug 5, pg 93 (F)

### Systems

- A concurrent high-level language requires run-time support. Oct 20, pg 325 (F)
- A concurrent PASCAL produces sophisticated software. Oct 20, pg 333 (F)
- A real-time alarm system tests EDN's RTOS. Oct 20, pg 313 (F)
- BASIC eases initial start-up in OEM controller systems. Nov 20, pg 103 (N)



# Article Index

## July-December 1979

Character-string manipulations power a text editor. Aug 20, pg 111 (F)

EDN Software Tutorial: Hash coding. Sept 20, pg 108 (F)

14-segment packaged display systems interface easily with equipment. Sept 20, pg 141 (P)

Hard-disc-based development system eases software/hardware integration. Sept 5, pg 99 (P)

Let your personal computer talk to test equipment. Aug 20, pg 118 (F)

Low-cost CRT terminals grow smarter, but not more expensive. Oct 5, pg 55 (N)

Magnetic-tape drives meet many storage needs. Nov 5, pg 127 (F)

Multibus-compatible analog-I/O boards incorporate high-gain differential amplifiers. Sept 20, pg 144 (P)

$\mu$ P-based data-acquisition systems also store, process and graph analog data. Nov 20, pg 231 (P)

$\mu$ P development systems offer the tools users need. Sept 5, pg 179 (F)

No guaranteed memory use for bubbles; fast memory, fixed storage loom brightest. Nov 5, pg 67 (N)

Plug-in boards provide LSI-11s and PDP-11s with EPROM-programming capability. Nov 5, pg 81 (P)

Primitives provide the operations that support concurrency. Oct 20, pg 299 (F)

16-bit microprocessors (Special Report). Aug 5, pg 70 (F)

The kernel's the key to concurrent operation. Oct 20, pg 303 (F)

The single-board- $\mu$ C alternative expands OEM design horizons. Oct 20, pg 256 (F)

Up-to-date  $\mu$ C hardware demands equally capable software. Oct 20, pg 293 (F)

Use a systematic procedure to evaluate new  $\mu$ Ps. Nov 20, pg 185 (F)

Use EPROM 1-chip  $\mu$ Cs as effective 1-shot lab aids. Aug 5, pg 97 (F)

Versatile in-circuit emulator complements any  $\mu$ P development system. Sept 20, pg 71 (P)

Voice input and output (Special Report). Nov 20, pg 158 (F)

## Semiconductors/ICs

Acting as an electronic lens, CCD array helps scan the human body ultrasonically. Sept 20, pg 57 (N)

An 8 $\times$ 8 multiplier and 8-bit  $\mu$ P perform 16 $\times$ 16-bit multiplication. Nov 5, pg 147 (F)

Analog design becomes software design with  $\mu$ P-based signal-processor chip. Sept 20, pg 142 (P)

Analog-switch designs pose knotty problems, but device improvements untangle the mess. Oct 20, pg 101 (N)

Capable IC sensors compensate T/C cold junctions. Oct 5, pg 121 (F)

Cartridge disc and software up development-system performance. Sept 5, pg 227 (P)

Design memory boards for RAM/ROM/EPROM interchange. Aug 20, pg 100 (F)

Designer's Guide to: IC voltage regulators—Part 1. Aug 20, pg 93 (F)

Designer's Guide to: IC voltage regulators—Part 2. Sept 5, pg 199 (F)

Dual current-differencing amplifier permits high-frequency designs. Sept 20, pg 99 (F)

Dual variable op-amp IC simplifies complex analog designs. Sept 5, pg 191 (F)

EDN's Sixth Annual  $\mu$ P/ $\mu$ C Chip Directory. Oct 20, pg 133 (F)

Ease bubble-system design with a few basic guidelines. Aug 5, pg 87 (F)

Frequency-synthesizer components ease the build-or-buy dilemma. Nov 20, pg 215 (F)

High-speed precision comparator suits 12-bit conversion applications. Aug 20, pg 65 (P)

High-voltage power MOSFETs meet off-line-converter needs. Nov 20, pg 207 (F)

ICs and semiconductors. July 20, pg 134 (F)

ICs and semiconductors. Dec 15, pg 36 (F)

Implement complex analog filters with a real-time signal processor. Nov 20, pg 171 (F)

Interlaced video displays utilize low-cost CRT controllers. Sept 5, pg 207 (F)

Linear ICs (Special Report). Aug 20, pg 71 (F)

Low-cost, high-capability LSI chips ease interface-bus implementation. Nov 5, pg 36 (N)

Midcon '79 will track technology trends in electronic-component design. Oct 20, pg 109 (N)

Multifunction monitor/alarm ICs save money and design time. Aug 5, pg 45 (N)

$\mu$ P-oriented octal buffer/latch combines best of speed and power. Aug 5, pg 63 (P)

Octal buffers simplify DMA access. Aug 5, pg 65 (M)

Power semiconductors (Special Report). Oct 5, pg 84 (F)

Preamp IC betters BiFET-amp noise spec by more than an order of magnitude. Nov 20, pg 141 (P)

PROMs decode ASCII characters for segmented LED displays. Aug 5, pg 105 (F)

Real-time trace tracks faults in bit-slice microcode. Oct 20, pg 360 (P)

Recent signal-conditioning ICs approach discrete-module performance. Sept 20, pg 39 (N)

Reduce crosstalk errors in analog multiplexers. Oct 5, pg 103 (F)

Single-board  $\mu$ C allows memory expansion. Aug 20, pg 136 (P)

"Super high-level" 4-bit  $\mu$ C performs most processing in 8-bit bytes. Sept 5, pg 105 (P)

Support chips gain in depth, but no surprises appear. Oct 20, pg 243 (F)

Switched-capacitor techniques implement effective IC filters. Nov 5, pg 103 (F)

Technology update: Magnetic-bubble memories. Aug 20, pg 80 (F)

Transient-voltage suppressors suit pc-board protection needs. Aug 20, pg 105 (F)

Use a systematic procedure to evaluate new  $\mu$ Ps. Nov 20, pg 185 (F)

VLSI poses problems, promise for computer science. Aug 20, pg 56 (N)

Wescon/79. Sept 5, pg 120 (F)

## $\mu$ Ps/ $\mu$ Cs

A concurrent high-level language requires run-time support. Oct 20, pg 325 (F)

A concurrent PASCAL produces sophisticated software. Oct 20, pg 333 (F)

A real-time alarm system tests EDN's RTOS. Oct 20, pg 313 (F)

An 8 $\times$ 8 multiplier and 8-bit  $\mu$ P perform 16 $\times$ 16-bit multiplication. Nov 5, pg 147 (F)

Analog design becomes software design with  $\mu$ P-based signal-processor chip. Sept 20, pg 142 (P)

BASIC eases initial start-up in OEM controller systems. Nov 20, pg 103 (N)

Cartridge disc and software up development-system performance. Sept 5, pg 227 (P)

Character-string manipulations power a text editor. Aug 20, pg 111 (F)

Circuit arbitrates four 8080 interrupts. Nov 20, pg 147 (M)

Design memory boards for RAM/ROM/EPROM interchange. Aug 20, pg 100 (F)

EDN Software Note #33: Interrupt instruction gives breakpoints. Aug 5, pg 66 (M)

EDN Software Note #34: TRS-80 routine sorts strings. Aug 20, pg 67 (M)

EDN Software Note #35: 6502 routine multiplies signed numbers. Sept 5, pg 119 (M)

EDN Software Note #36: F8 routine swaps registers. Sept 20, pg 74 (M)

EDN Software Note #37: 6800 routine supervises service requests. Oct 5, pg 73 (M)



# A whole new world of $\mu$ software development.

## Introducing the MDT 1000 Series.



It's affordable. It's expandable. It's a whole new world of microsoftware development for everyone using the powerful 6500 microprocessor family—the MDT 1000 Series from Synertek Systems.

This is a Micro Development Tool that has it all—complete with CRT display, keyboard, system software, three Micromodule boards, EPROM programmer and power supply plus optional CAS-1 recorders. For software develop-

ment. Hardware prototyping. Testing. Consulting. Or just learning about microprocessors. And, because the MDT 1000 is Motorola EXORcisor™ bus compatible, it expands in a snap to meet growing system requirements.

Programming the MDT 1000 saves time. That's programming as it should be. The MDT 1000, with optional BAS-1, offers over 20,000 bytes of ROM-based operating software. This software availability is made possible by the over 12,000 SYM-1 single board computers already in use today. Standard features include a powerful 8K ROM resident assembler/editor, RAE.

The best thing about the MDT 1000 is that it's available right now—in 4K, 8K and 16K RAM versions at prices you would expect to pay for a CRT terminal or EPROM programmer alone. Starting at \$1,495. For complete technical infor-

mation on the MDT 1000 Series, contact your nearest Synertek Systems distributor. Or call at (408) 988-5682 or 988-5689.

**Synertek Systems** manufactures a growing line of evaluation microcomputers and keyboard modules, OEM modules, and development systems for both standard and custom applications.

## **SYNERTEK SYSTEMS**

A SUBSIDIARY OF HONEYWELL  
150 S. Wolfe Road, Sunnyvale, CA 94086  
(408) 988-5682 or 988-5689 TWX: 910-338-0135

For more information, Circle No 144





# Article Index

## July-December 1979

EDN Software Note #38: Simulate multipath fading in BASIC. Oct 20, pg 120 (M)

EDN Software Note #39: Routine displays text strings. Nov 5, pg 83 (M)

EDN Software Note #40: Z8002 scales BCD values. Nov 20, pg 147 (M)

EDN's Sixth Annual  $\mu$ P/ $\mu$ C Chip Directory. Oct 20, pg 133 (F)

8080 routine emulates PLA hardware, Oct 5, pg 81 (M)

Hand-held computer games show increased versatility. Nov 20, pg 131 (N)

Hard-disc-based development system eases software/hardware integration. Sept 5, pg 99 (P)

Implement complex analog filters with a real-time signal processor. Nov 20, pg 171 (F)

Interlaced video displays utilize low-cost CRT controllers. Sept 5, pg 207 (F)

Let your personal computer talk to test equipment. Aug 20, pg 118 (F)

Low-cost general-purpose  $\mu$ C board increases interface flexibility. Aug 5, pg 143 (P)

Magnetic-tape drives meet many storage needs. Nov 5, pg 127 (F)

Midcon '79 will track technology trends in electronic-component design. Oct 20, pg 109 (N)

Mini/Micro '79 scans the computer horizon—from data-base details to Star Wars spectacles. Oct 5, pg 67 (N)

Multibus-compatible analog-I/O boards incorporate high-gain differential amplifiers. Sept 20, pg 144 (P)

$\mu$ C system generates arbitrary waveforms. Aug 20, pg 67 (M)

$\mu$ P-based data-acquisition systems also store, process and graph analog data. Nov 20, pg 231 (P)

$\mu$ P development systems offer the tools users need. Sept 5, pg 179 (F)

$\mu$ P-oriented octal buffer/latch combines best of speed and power. Aug 5, pg 63 (P)

Octal buffers simplify DMA access. Aug 5, pg 65 (M)

Plug-in boards provide LSI-11s and PDP-11s with EPROM-programming capability. Nov 5, pg 81 (P)

Primitives provide the operations that support concurrency. Oct 20, pg 299 (F)

Real-time trace tracks faults in bit-slice microcode. Oct 20, pg 360 (P)

Replace PIAs—save space and money. Sept 20, pg 73 (M)

Single-board  $\mu$ C allows memory expansion. Aug 20, pg 136 (P)

Single-board processor provides universal interface. Nov 5, pg 165 (P)

6502 routines aid debugging. Sept 5, pg 113 (M)

16-bit microprocessors (Special Report). Aug 5, pg 70 (F)

Software switches baud rate. Nov 5, pg 83 (M)

"Super high-level" 4-bit  $\mu$ C performs most processing in 8-bit bytes. Sept 5, pg 105 (P)

Support chips gain in depth, but no surprises appear. Oct 20, pg 243 (F)

The kernel's the key to concurrent operation. Oct 20, pg 303 (F)

The single-board- $\mu$ C alternative expands OEM design horizons. Oct 20, pg 256 (F)

UARTs: Hardware or software? Oct 20, pg 119 (M)

Up-to-date  $\mu$ C hardware demands equally capable software. Oct 20, pg 293 (F)

Use a systematic procedure to evaluate new  $\mu$ Ps. Nov 20, pg 185 (F)

Use EPROM 1-chip  $\mu$ Cs as effective 1-shot lab aids. Aug 5, pg 97 (F)

Versatile in-circuit emulator complements any  $\mu$ P development system. Sept 20, pg 71 (P)

VLSI poses problems, promise for computer science. Aug 20, pg 56 (N)

Wide-ranging self-study courses bring the  $\mu$ C-design classroom home. Oct 20, pg 69 (N)

You're ready for 16-bit processors, but is your logic analyzer? Sept 5, pg 89 (N)

## Computers/Peripherals

A concurrent high-level language requires run-time support. Oct 20, pg 325 (F)

A concurrent PASCAL produces sophisticated software. Oct 20, pg 333 (F)

A real-time alarm system tests EDN's RTOS. Oct 20, pg 313 (F)

Autoranging 12-bit A/D converter extends dynamic range to 19 bits. Nov 20, pg 137 (P)

BASIC eases initial start-up in OEM controller systems. Nov 20, pg 103 (N)

Cartridge disc and software up development-system performance. Sept 5, pg 227 (P)

Computers and peripherals. July 20, pg 266 (F)

Computers and peripherals. Dec 15, pg 230 (F)

EDN Software Tutorial: Hash coding. Sept 20, pg 108 (F)

Hard-disc-based development system eases software/hardware integration. Sept 5, pg 99 (P)

Let your personal computer talk to test equipment. Aug 20, pg 118 (F)

Low-cost CRT terminals grow smarter, but not more expensive. Oct 5, pg 55 (N)

Magnetic-tape drives meet many storage needs. Nov 5, pg 127 (F)

Mini/Micro '79 scans the computer horizon—from data-base details to Star Wars spectacles. Oct 5, pg 67 (N)

Multibus-compatible analog-I/O boards incorporate high-gain differential amplifiers. Sept 20, pg 144 (P)

$\mu$ P-based data-acquisition systems also store, process and graph analog data. Nov 20, pg 231 (P)

Plug-in boards provide LSI-11s and PDP-11s with EPROM-programming capability. Nov 5, pg 81 (P)

Primitives provide the operations that support concurrency. Oct 20, pg 293 (F)

Real-time trace tracks faults in bit-slice microcode. Oct 20, pg 360 (P)

Single-board  $\mu$ C allows memory expansion. Aug 20, pg 136 (P)

Single-board processor provides universal interface. Nov 5, pg 165 (P)

10.67M-byte 8-in. fixed-disc drive provides \$113/Mbyte storage. Oct 5, pg 159 (P)

The kernel's the key to concurrent operation. Oct 20, pg 303 (F)

The single-board- $\mu$ C alternative expands OEM design horizons. Oct 20, pg 256 (F)

Up-to-date  $\mu$ C hardware demands equally capable software. Oct 20, pg 293 (F)

Versatile analog-input board offers software-programmable gain. Nov 20, pg 143 (P)

Versatile in-circuit emulator complements any  $\mu$ P development system. Sept 20, pg 71 (P)

Voice input and output (Special Report). Nov 20, pg 158 (F)

## Instrumentation, Test & Measurement

At \$9600, this 21-GHz spectrum analyzer combines low price, high performance. Sept 20, pg 146 (P)

Autoranging 12-bit A/D converter extends dynamic range to 19 bits. Nov 20, pg 137 (P)

Capable IC sensors compensate T/C cold junctions. Oct 5, pg 121 (F)

Cartridge disc and software up development-system performance. Sept 5, pg 227 (P)

Conductivity monitor uses one 747. Aug 5, pg 124 (D)

DMM handles lab/field measurements and provides diode-test capability. Aug 5, pg 143 (P)

DMMs add functions and features as prices continue to fall. Nov 20, pg 83 (N)

DMM's audible-response feature eases production testing. Oct 20, pg 356 (P)

Data recorder's linearity error bows to solid-state light shutter. Aug 20, pg 133 (P)



# 8-lane express for fiber optics.



Amphenol™ 801 Series connectors.  
8 individual channels. Low insertion loss.  
Plus the assembly speed of Amphenol  
circular connectors.

Now there's a fast, precise reliable way to make up to eight separate fiber-optic connections at one time. And to replace any optical channel as required.

The insertion loss per channel is only 1.5 to 2.0 dB with most fibers. It's done with our spring retainer\* that makes each channel independent of the tolerance build-up of any other.

The 801 Series looks familiar because it's an adaptation of our Mil-qualified circular connectors. So you get environmental sealing. And the speed of rear insertion/rear removal. And you can use M83723/31-12 insertion and removal tools.

801 Series connectors are available in 4-channel or 8-channel configurations (shown above). Both are designed for single fibers, but they can be adapted to multiple fiber bundles. When using multi-fiber bundles, you can mix electrical and optical contacts in any combination.

Optional strain relief mechanism protects the fiber bundle, maintains integrity of fiber optics interconnect and can be potted for environmental sealing.

Put the speed and performance of our 801 Series to work on your fiber-optic problem. For more information, call the sales office or distributor nearest you. Or contact our Danbury, Connecticut operations. (203) 743-9272.

\*Patent pending



4-channel

Shown 2/3 actual size



## AMPHENOL NORTH AMERICA

A Division of Bunker Ramo Corporation

Amphenol North America Division Headquarters: Oak Brook, Illinois 60521

**Sales Offices:** Atlanta (404) 394-6298 • Boston (617) 475-7055 • Chicago (312) 986-2330 • Dallas (214) 235-8318 • Dayton (513) 294-0461  
Denver (303) 752-4114 • Greensboro (919) 292-9273 • Houston (713) 444-4096 • Indianapolis (317) 842-3245 • Kansas City (816) 737-3937  
Knoxville (615) 690-6765 • Los Angeles (213) 649-5015 • Minneapolis (612) 835-4595 • New York (516) 364-2270 • Orlando (305) 647-5504  
Philadelphia (215) 732-1427 • Phoenix (602) 265-3227 • St. Louis (314) 569-2277 • San Diego (714) 272-5451 • San Francisco (408) 732-8990  
Seattle (206) 455-2525 • Syracuse (315) 455-5786 • Washington, DC (703) 524-8700  
**Canada:** Montreal (514) 482-5520 • Toronto (416) 291-4401 • Vancouver (604) 278-7636 • **International:** Oak Brook, Illinois TELEX 206-054

For more information, Circle No 145

SEE US AT ELECTRO '80 SPACE 2544-2550.



# Article Index

## July-December 1979

Economical laser-diode light sources serve optical-instrumentation needs. Oct 20, pg 117 (P)

5-MHz master/slave waveform recorder monitors up to eight channels. Oct 20, pg 354 (P)

Hard-disc-based development system eases software/hardware integration. Sept 5, pg 99 (P)

IEEE-488-compatible instruments (Special Report). Nov 5, pg 90 (F)

Instruments. July 20, pg 94 (F)

Instruments. Dec 15, pg 266 (F)

Interface options increase flexibility of versatile digital-board tester. Sept 20, pg 146 (P)

Let your personal computer talk to test equipment. Aug 20, pg 118 (F)

Looking for hot spots? Try a universal probe. Aug 20, pg 43 (N)

Low-cost, high-capability LSI chips ease interface-bus implementation. Nov 5, pg 36 (N)

Low-cost logic-state/timing analyzer checks parallel/serial data, signatures. Nov 5, pg 163 (P)

Low-cost portable logic analyzer diagnoses analog and digital hardware. Aug 20, pg 61 (P)

Meter monitors telephone sound levels. Aug 5, pg 121 (D)

Microwave frequency counters sharpen accuracies, expand range. Aug 20, pg 49 (N)

$\mu$ P-based data-acquisition systems also store, process and graph analog data. Nov 20, pg 231 (P)

$\mu$ P development systems offer the tools users need. Sept 5, pg 179 (F)

Nine-range, line-powered capacitance meter features 0.1%-of-reading accuracy. Oct 5, pg 159 (P)

100-MHz dual-trace oscilloscope features high sensitivity, composite trigger. Sept 5, pg 103 (P)

Probes and test cells simplify EMI testing. Sept 5, pg 51 (N)

Real-time trace tracks faults in bit-slice microcode. Oct 20, pg 360 (P)

Simple voltmeter monitors TTL supplies. Oct 20, pg 339 (D)

There's more to measuring power than calculating an  $E \times I$  product. Oct 5, pg 129 (F)

Triple- $\mu$ P plotters draw true curves. Oct 5, pg 160 (P)

Universal GPIB switching system interfaces analog, digital I/O. Oct 20, pg 353 (P)

Versatile analog-input board offers software-programmable gain. Nov 20, pg 143 (P)

Versatile in-circuit emulator complements any  $\mu$ P development system. Sept 20, pg 71 (P)

You're ready for 16-bit processors, but is your logic analyzer? Sept 5, pg 89 (N)

## Communications

Don't court disaster in DTMF signaling systems. Nov 5, pg 136 (F)

Fiber-optic data links serve industrial/audio uses. Oct 20, pg 359 (P)

Fiber-optic flashes: Conference, TV link. Sept 20, pg 60 (N)

Fiber-optic links for nontelecomm use help avoid overspecification problems. Nov 20, pg 121 (N)

Fiber optics extends 488-bus link to 100m. Aug 20, pg 134 (P)

Frequency-synthesizer components ease the build-or-buy dilemma. Nov 20, pg 215 (F)

Implement complex analog filters with a real-time signal processor. Nov 20, pg 171 (F)

Low-cost, high-capability LSI chips ease interface-bus implementation. Nov 5, pg 36 (N)

Low-profile transmit/receive modules increase packaging density. Sept 20, pg 69 (P)

Statistical time-division multiplexers grow faster and more flexible than ever. Nov 5, pg 55 (N)

To understand serial communication, start with the basics. Sept 20, pg 125 (F)

Universal GPIB switching system interfaces analog, digital I/O. Oct 20, pg 353 (P)

## Components

Autoranging 12-bit A/D converter extends dynamic range to 19 bits. Nov 20, pg 137 (P)

Bleepers, buzzers give your design a voice. Oct 20, pg 85 (N)

Circular connectors employ novel designs to deal with tough commercial environments. Sept 5, pg 65 (N)

Components. July 20, pg 22 (F)

Components. Dec 15, pg 153 (F)

Don't neglect thermal concerns when specifying motor needs. Sept 20, pg 119 (F)

Dot-matrix LCD modules use CMOS-LSI drive. Aug 20, pg 133 (P)

Economical laser-diode light sources serve optical-instrumentation needs. Oct 20, pg 117 (P)

Fiber optics extends 488-bus link to 100m. Aug 20, pg 134 (P)

Flat-cable interconnection techniques bring relief to prototype-system designers. Sept 5, pg 77 (N)

14-segment packaged display systems interface easily with equipment. Sept 20, pg 141 (P)

Frequency counters span 30 MHz to 3 GHz. Sept 20, pg 63 (P)

Frequency-synthesizer components ease the build-or-buy dilemma. Nov 20, pg 315 (F)

High-efficiency polypropylene capacitors enhance switching-power-supply designs. Nov 20, pg 139 (P)

Low-profile, low-power transformers fill many pc-board-mounting needs. Nov 5, pg 43 (N)

Low-profile transmit/receive modules increase packaging density. Sept 20, pg 69 (P)

Midcon '79 will track technology trends in electronic-component design. Oct 20, pg 109 (N)

Piezo films and tiny silicon-based relays promise innovative actuator designs. Nov 20, pg 111 (N)

Pots and trimmers (Special Report). Sept 20, pg 80 (F)

Simplified drivers, new applications spur plasma-panel usage. Sept 20, pg 51 (N)

Surface-acoustic-wave devices replace conventional filter components. Nov 20, pg 69 (N)

Ultrahigh-speed S/D converters fit industrial-control applications. Oct 20, pg 353 (P)

User-trimmable resistor networks reduce circuit-design costs. Aug 5, pg 93 (F)

Wescon/79. Sept 5, pg 120 (F)

## Power Sources

Cool-running open-frame switchers regulate all outputs to 0.2%. Aug 5, pg 144 (P)

Designers enjoy an expanded choice of battery forms and capabilities. Aug 5, pg 33 (N)

Efficient pin-fin heat-sink design packs 200W switcher in 4-lb package. Oct 5, pg 160 (P)

High-efficiency polypropylene capacitors enhance switching-power-supply designs. Nov 20, pg 139 (P)

High-voltage power MOSFETs meet off-line-converter needs. Nov 20, pg 207 (F)

Low-profile, low-power transformers fill many pc-board-mounting needs. Nov 5, pg 43 (N)

Modulated boost-chopper battery charger improves electric-car operating efficiency. Oct 5, pg 49 (N)

Power sources. July 20, pg 308 (F)

Power sources. Dec 15, pg 322 (F)



Cable design has come a long way since data transmission systems were handled only by twisted pairs. Today, many sophisticated EDP systems have evolved making miniaturization and higher speeds prime design objectives. Brand-Rex has been involved in these developments from their beginning.

Because of this we can offer a broad range of alternatives in sophisticated and more efficient signal transmission cables.

Brand-Rex Signal Transmission Cables comes in a variety of constructions: with solid dielectric, air-spaced

dielectric, foam dielectric and irradiated (cross-linked) cellular polyethylene cores.

Air-spaced and foam-dielectric cores reduce cable size substantially without sacrificing electrical quality. Irradiating these coax cores increases their mechanical integrity. Twin- and Tri-Lead cables combine the advantages of coaxial and flat flexible cable for complex applications.

We can design the exact performance features you need when we know your application. To get a more complete picture of our capabilities, send for our brochure on Signal Transmission Cables.

Call or write Brand-Rex Company, Electronic and Industrial Cable Division, Willimantic, Connecticut 06226. 203/423-7771.

## **BRAND-REX**

ELECTRONIC AND INDUSTRIAL CABLE DIVISION  
Brand-Rex Company Divisions  
Abbott & Co.: electrical harnesses for industry  
Brand-Rex Ltd. (Scotland): wire and cable  
Electronic & Industrial Cable Division: wire and cable  
Nonotuck Manufacturing Company: copper wire  
Pyle-National Company: electrical connectors  
Telecommunications Cable Division: wire and cable  
Teltronics, Inc.: telecommunications products

BRAND-REX COMPANY, A PART OF AKZONAH INC.

# **OUR SIGNAL TRANSMISSION CABLES SPEED MORE SIGNALS THROUGH LESS SPACE.**



## **STATE-OF-THE-ART-SOLUTIONS**




# Insert Molded Assemblies! If you buy, specify or use them let Tricon quote on your needs.

Let us take a hard look at your metal/plastics combinations. We answer those two key questions: 'Is there a way to make them at a lower cost?' 'Is there a way to make them function better?' Send us your prints, talk to us or, for starters, let us send you our handy booklets on Molded Assemblies and Custom Switches.

TRICON INDUSTRIES, INC.  
2325 Wisconsin Avenue  
Downers Grove, IL 60515  
Phone: (312) 964-2330

For more information, Circle No 147

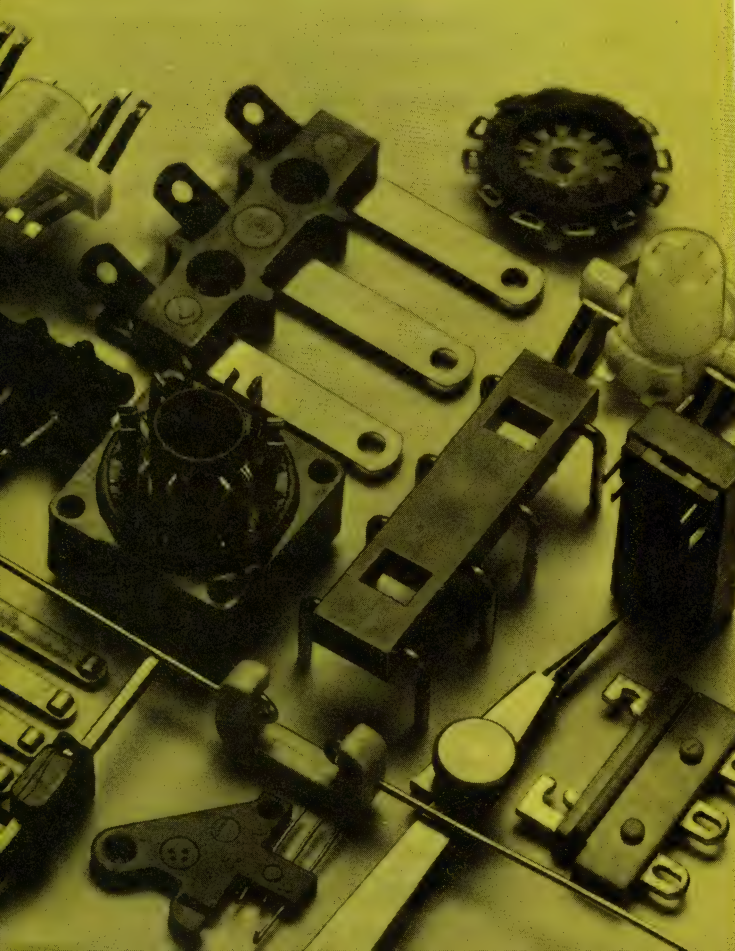

## Article Index July-December 1979

There's more to measuring power than calculating an  $E \times I$  product. Oct 5, pg 129 (F)

Universal-input 25W off-line switchers hold peak inrush current below 10A. Nov 5, pg 165 (P)

### Materials & Packaging

Catastrophic failures limit applications of high-density epoxy/glass pc boards. Sept 5, pg 59 (N)

Circular connectors employ novel designs to deal with tough commercial environments. Sept 5, pg 65 (N)

EMI shielding and protective components (Special Report). Sept 5, pg 165 (F)

Flat-cable interconnection techniques bring relief to prototype-system designers. Sept 5, pg 77 (N)

Hardware and interconnect devices. July 20, pg 218 (F)

Hardware and interconnect devices. Dec 15, pg 108 (F)

Low-profile transmit/receive modules increase packaging density. Sept 20, pg 69 (P)

Preferred-location socket pinning speeds boards to market. Aug 5, pg 61 (P)

Space-saving, low-cost prototype boards use insulation-displacement contacts. Sept 5, pg 227 (P)

Today's heat sinks, fans and blowers guard against overcooked semiconductors. Oct 5, pg 37 (N)

Transient-voltage suppressors suit pc-board protection needs. Aug 20, pg 105 (F)

### Management/Career

Midecon'79 will track technology trends in electronic-component design. Oct 20, pg 109 (N)

Wescon/79. Sept 5, pg 120 (F)

Well-defined managerial policies optimize R&D productivity—Part 1. Nov 5, pg 115 (F)

Well-defined managerial policies optimize R&D productivity—Part 2. Nov 20, pg 197 (F)

**Article Interest Quotient (Circle One)**  
**High 491 Medium 492 Low 493**

## NEXT TIME

In EDN's May 5 issue, look for a preview of key sessions and product exhibits at NCC '80. This year's National Computer Conference promises to be bigger and better than ever, and EDN will be there. Also look for feature articles on


- The latest serial printers, complete with a handy clip-out chart
  - The next step in EDN's hands-on  $\mu$ C Design Series exploration of analog  $\mu$ Ps
  - A handy programmable-calculator program for calculating the noise bandwidth of filters
  - Spec'ing CRTs for use in video terminals
- ... and much more. Look, too, for news round-ups on developments in PROM programmers and color CRTs, plus a report on the latest action in 8-in.-hard-disc standards, plus our regular  $\mu$ Computerist Corner and Design Ideas departments. You can't afford to miss this issue!

**EDN: Everything Designers Need**



# MULTIPLE OUTPUT SWITCHING POWER SUPPLIES

THE SWITCHER COST BREAKTHROUGH YOU'VE BEEN WAITING FOR!

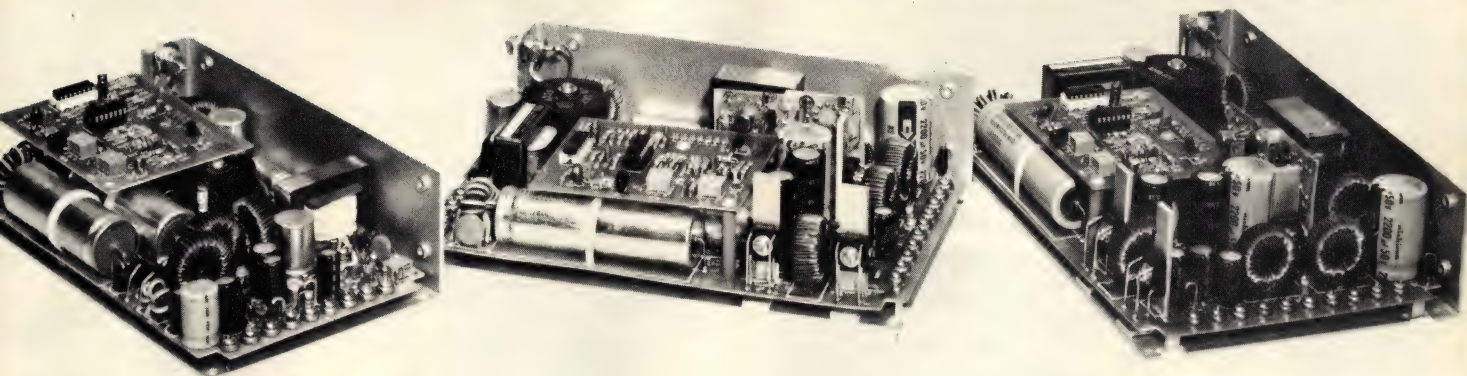

Power/Mate introduces Econo/Switch Multiple Output Switching Power Supplies priced to give substantial savings, yet provide the performance and reliability you depend on in a quality switcher.

The use of Power/Mate's new monolithic chip permits the reduction of parts count by 20% for a much higher MTBF, backed up with a two year warranty. Reliability has been greatly improved by use of computer-aided "worst-case analysis," individual testing of every IC and semi-conductor, and a comprehensive burn-in program.

These carefully packaged units have extremely high component density for maximum wattage per cubic inch. The standard unit has 5V primary regulated output and two 12 or 15V regulated outputs, plus 5V and 24V semi-regulated outputs. Special units are manufactured to order with voltages specified from 5 to 28V for each of the three regulated outputs and 5 to 50V for the two semi-regulated outputs. Total continuous output power of the unit is 100, 200 or 300 watts. (See charts)

The Econo/Switch multiple output supply gives you exceptional versatility, combined with reliability, efficiency and compactness... low cost.

## Features.

- Up to five outputs, three regulated and two semi-regulated.
- Choice of voltage and current on all outputs up to maximum wattage total.
- Voltage adjustable on all regulated outputs.
- Brownout protection.
- OVP standard on primary output.
- Overload protection.
- Short circuit protection.
- Reverse polarity protection.
- Soft start protection.
- Adjustable current limiting on regulated outputs.
- Meets UL and CSA standards.
- Convenient 2-surface mounting.
- Convection cooled.
- Remote sensing.
- Advanced EMI filtering.
- Isolated Returns. (Note 3)

## ESM-100 Series — 100 Watts

**\$199.**

	Model	Output 1	Output 2	Output 3	Output 4	Output 5	Max. Cont. Output Power
Standard Models	ESM-100-5001	5V @ 10A	12V @ 3A	12V @ 3A	5V @ 2A	24V @ 2A	100W
	ESM-100-5002	5V @ 10A	15V @ 3A	15V @ 3A	5V @ 2A	24V @ 2A	100W
Customized Models	ESM-100-xxxx	* @ 10A	* @ 3A	* @ 3A	* @ 2A	* @ 2A	100W

## ESM-200 Series — 200 Watts

**\$319.**

	Model	Output 1	Output 2	Output 3	Output 4	Output 5	Max. Cont. Output Power
Standard Models	ESM-200-5001	5V @ 20A	12V @ 4A	12V @ 4A	5V @ 2A	24V @ 4A	200W
	ESM-200-5002	5V @ 20A	15V @ 4A	15V @ 4A	5V @ 2A	24V @ 4A	200W
Customized Models	ESM-200-xxxx	* @ 20A	* @ 4A	* @ 4A	* @ 2A	* @ 4A	200W

## ESM-300 Series — 300 Watts

**\$399.**

	Model	Output 1	Output 2	Output 3	Output 4	Output 5	Max. Cont. Output Power
Standard Models	ESM-300-5001	5V @ 30A	12V @ 6A	12V @ 6A	5V @ 4A	24V @ 4A	300W
	ESM-300-5002	5V @ 30A	15V @ 6A	15V @ 6A	5V @ 4A	24V @ 4A	300W
Customized Models	ESM-300-xxxx	* @ 30A	* @ 6A	* @ 6A	* @ 4A	* @ 4A	300W

User specified. Consult factory or local sales office. Minimum 250 units.

**Note 1:** Maximum specified current cannot be drawn from all outputs simultaneously. At no time should the average current exceed the maximum continuous output power. Above this point, output voltages and currents will be automatically reduced on all outputs. **Note 2:** Output 1 must be loaded to 15% of total output power to maintain proper regulation of other outputs. (Supply will not be damaged by no-load condition on Output 1. **Note 3:** On ESM-200 and ESM-300 models, all five outputs are isolated. On ESM-100 models outputs 4 and 5 have a common return. All other outputs are isolated.)

**Options:** Crowbar up to 8 Amps \$8, greater than 8 Amps \$16. Add Suffix V to Model No. Cover \$10. Add Suffix C to Model No.

## Specifications.

**AC Input:** 95-132 and 190-264 VAC, 47-63Hz

**Regulation:** Line: 0.2% within AC limits specified above. Load regulation first three outputs  $\pm 0.2\%$ . Load regulation last two outputs  $\pm 5\%$ , cross regulation  $\pm 3\%$ .

**Noise and Ripple:** 50mV p-p on first output, 150mV on all other outputs.

**Temperature Coefficient:** 0.02% per °C on first output, 0.05% per °C on all other outputs.

**Efficiency:** 65 to 80% typical.

**Transient Response:** Recovery to 1% in 2 milliseconds for a 50 to 100% load change.

**Remote or Local Sensing:** Provision included for improved overall regulation.

**Overload and Short Circuit Protection:** Solid state short circuit protection. Automatic electronic current limiting circuit limits output current to a preset value, thereby providing protection for the load as well as the supply. Units cannot be damaged by prolonged short circuits.

**Overshoot:** No voltage spikes on turn-on, turn-off or power failure.

**Overvoltage Protection:** Built in on primary output.

**Energy Storage Time:** The output voltage will remain within regulation for a minimum of 16 milliseconds after loss of AC input power (from nominal line voltage).

**Polarity:** May be either positive, negative or floating up to 300 volts DC.

**Soft Start:** Provides input current limiting at turn-on.

**Long Term Stability:** 0.1% for 8 hours after 20 minute warm-up.

**Ambient Operating Temperature:** Continuous duty from 0°C to 71°C. Full rating from 0°C to 50°C, derate linearly to 50% of rating at 71°C.

**Storage Temperature:** -55°C to +85°C.

**Quality Control:** In accordance with MIL-I-45208.

# POWER/MATE. THE SWITCHER COMPANY.


514 S. River St./Hackensack, New Jersey 07601/(201) 440-3100/TWX (710) 990-5023  
3303 Harbor Blvd./Costa Mesa, CA 92626/(714) 957-1606/TWX (910) 595-1766

The world's largest supplier of quality switching power supplies.

For more information, Circle No 148



# The last word in word generators.

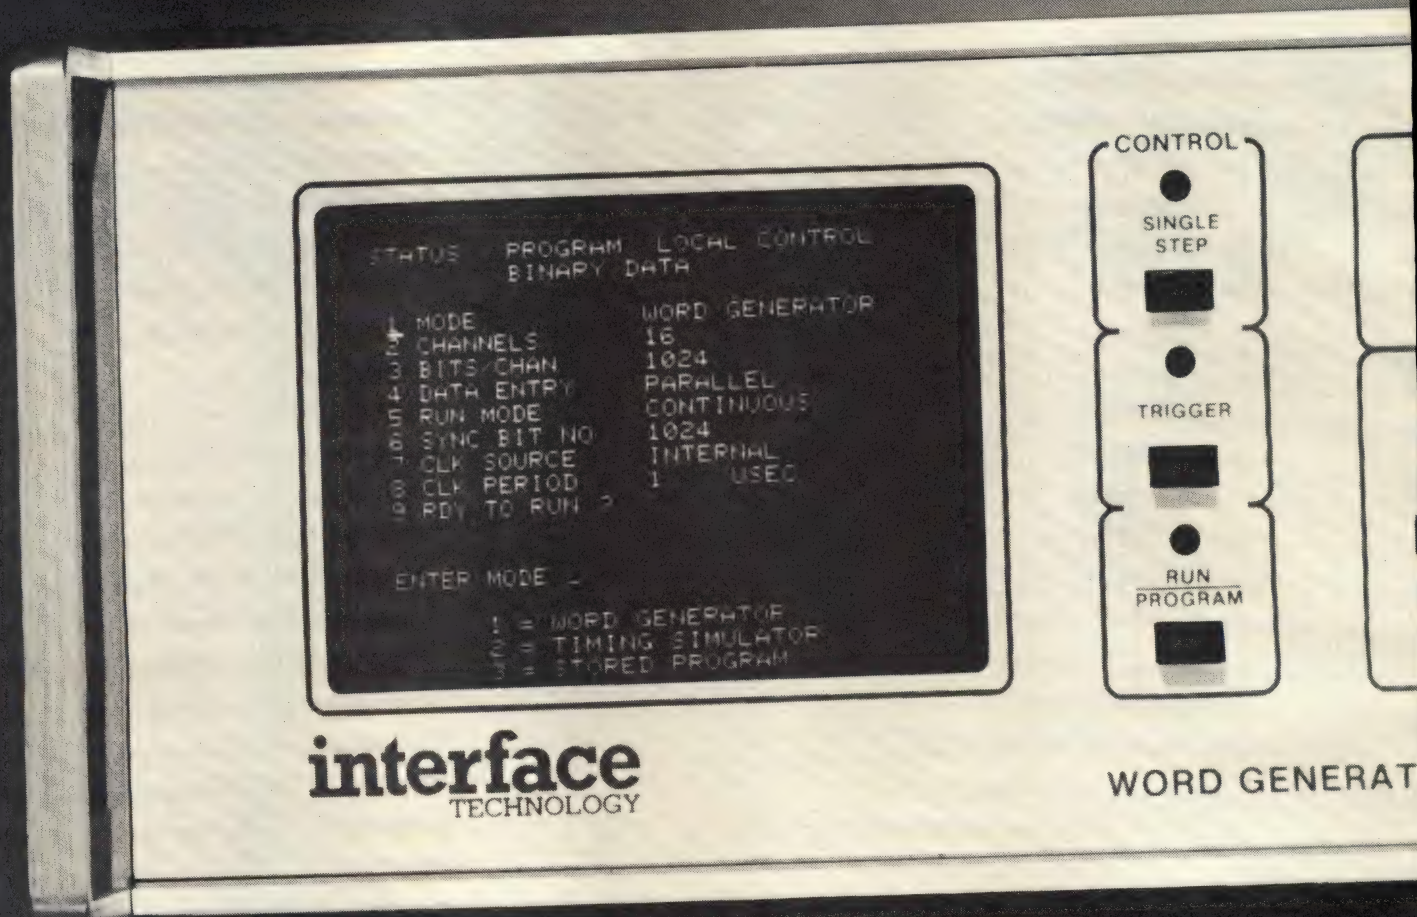

**Introducing the RS-660. It's the world's  
first interactive digital signal source and test tool.**

Now you can combine the operating advantages of an intelligent terminal with the complex data generation capabilities you need to test and debug today's circuits and subassemblies.

It takes you step-by-step through each sequence necessary for data preparation. And the parameters needed to setup typical operating characteristics such as clock period, bits/channel, etc. No more thumbing through users' manuals.

It lets you see a complete test sequence — not just one bit or word

at a time. No more guesswork.


And it helps you generate any arbitrary digital waveform in two modes: word generation or timing simulation. No more kluge boxes.

So you can easily create, verify and edit the patterns you want and, in turn, stimulate the device under test. With these known test signals you can determine whether the outputs of the device are up to snuff.

You save time, with far fewer errors, and a lot less hassle.

The RS-660. It's the first step —

and the last word — in simple, efficient digital testing and development. Write for our detailed new brochure.

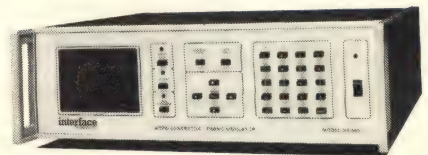

**interface**  
TECHNOLOGY

150 East Arrow Highway • San Dimas, CA 91773 • TEL: 714-599-0848 • TWX: 910-581-3847

For more information, Circle No 149



# "Smart force" power from ERG puts electroluminescence in a whole new light!



## PROBLEM:

As electroluminescent lamps age, their brightness drops off considerably. Until now, this characteristic has stymied many engineers who sought the exciting design advantages offered by EL technology.

## OLD SOLUTION:

"Brute force" — continually increase voltage supplied to lamp to sustain EL brightness over lamp life duration. Method often contributed to premature lamp failure. And componentry was expensive!

## NEW SOLUTION:

"Smart force" — achieve essentially constant EL brightness through self-correcting DC-to-AC power inversion. Energy-efficiency at low cost!

## ERG spearheads the EL power breakthrough!

From Endicott Research Group comes an exciting new development in electroluminescent power technology! An economical, yet reliable, power source which overcomes the problem posed by EL aging.

Because it automatically adapts its own voltage and frequency over the course of EL lamp life, our "smart force" E600 DC-to-AC inverter delivers constant power output, maintaining essentially constant brightness.

## "ERG" opens the door to the EL universe


Our E600 helps you open the door to almost limitless design options made possible by electroluminescence. Use EL to backlight LCD's, membrane switches and "dead-front" panels. Or put EL to work for lighting, for signalling, for decorating, in a host of consumer, industrial and military applications!

## Tell us about your EL power needs


Our E600 has met the economy and reliability needs of the auto industry! And now, we can tailor EL power to your needs.

**Let us know your:** 1. EL surface area to be excited; 2. type of EL phosphors; 3. brightness level desired; and 4. operating life.

**Call or write today!**



ERG DC-to-AC  
inverter  
Patent pending

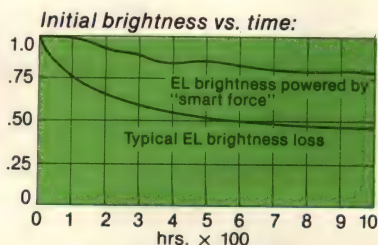

Luminescent Systems #20014-2 EL  
lamp (16 IN<sup>2</sup>) and ERG E613 - E0003  
inverter (V IN = 12V).

See us at  
Electro Show,  
booth #1813.



**Endicott Research Group, Inc.**

Subsidiary of Endicott Coil Co., Inc.

P.O. Box 128 Westview Station, Binghamton, N.Y. 13905

607-798-7846 TWX 510-252-0155

For more information, Circle No 150




# Get 1 watt output from your H-P generator with a Mini-Circuits amplifier!

**0.05 - 1000 MHz**  
**from \$199**

Need more than the 10 mw available from your signal/sweep generator or synthesizer for system and subsystem testing?

Just add a MiniCircuits' ZHL wideband amplifier and boost the 10 mw level to 1 watt or +30 dBm. Also, there's an additional benefit ... as much as 40 dB isolation will be added between the generator and the system under test. And VSWR is less than 2:1 over the full frequency range.

Upgrade your present generator now ... check the specs and low prices below and order your ZHL wideband amplifier today ... and we will ship within one week!

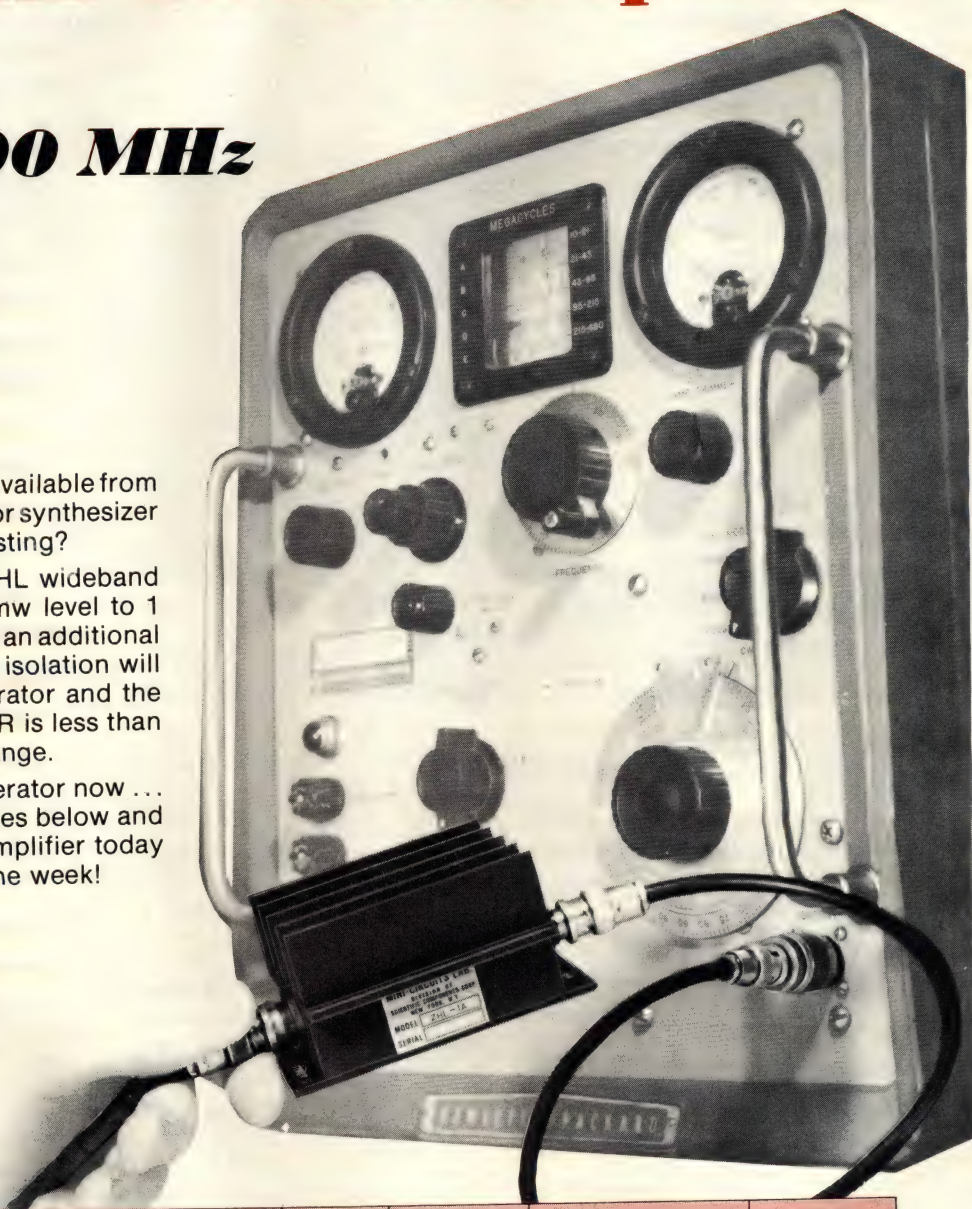

MODEL NO.	FREQ. MHz	GAIN dB	GAIN FLATNESS dB	MAXIMUM POWER OUTPUT dBm 1-dB COMPRESSION	NOISE FIGURE dB	INTERCEPT POINT 3RD ORDER dBm	DC POWER		PRICE	
							VOLTAGE	CURRENT	\$ EA.	QTY.
ZHL-1A	2-500	16 Min.	±1.0 Max.	+28 Min.	11 Typ.	+38 Typ.	+24V	0.6A	199.00	(1-9)
ZHL-2	10-1000	16 Min.	±1.0 Max.	+29 Min.	18 Typ.	+38 Typ.	+24V	0.6A	349.00	(1-9)
ZHL-3A	0.4-150	24 Min.	±1.0 Max.	+29.5 Min.	11 Typ.	+38 Typ.	+24V	0.6A	199.00	(1-9)
ZHL-2-8	10-1000	27 Min.	±1.0 Max.	+29 Min.	10 Typ.	+38 Typ.	+24V	0.65A	449.00	(1-9)
ZHL-32A	0.05-130	25 Min.	±1.0 Max.	+27 Min.	10 Typ.	+33 Typ.	24V	0.6A	199.00	(1-9)

Total safe input power +20 dBm, operating temperature 0° C to +60° C, storage temperature -55° C to +100° C, 50 ohm impedance, input and output VSWR 2:1 max. For detailed specs and curves, refer to 1979/80 MicroWaves Product Data Directory, p. 364-365 or EEM p. 2970-2971.

2625 East 14th Street Brooklyn, New York 11235 (212) 769-0200  
Domestic and International Telex 125460 International Telex 620156

World's largest manufacturer of Double Balanced Mixers  
**Mini-Circuits**  
MINI-CIRCUITS LABORATORY  
A Division of Scientific Components Corp. R45/Rev/BM

For more information, Circle No 151



## Mike Parsin

Precision Monolithics Inc, Santa Clara, CA


There are three basic ways of resolving this conflict. The first employs an all-hardware system using multiple flash converters—a very fast and expensive approach. The second involves an all-software configuration using successive-

```

ORG      1000H
BEGIN:   LXI    D, 1808H    ; LOAD MUX COUNTERS
        LXI    SP, 200FH   ; SET STACK POINTER
START:   LXI    H, 8000H   ; SET MEMORY MUX ENABLE
        MOV    A, D        ; READY MUX
        MOV    M, A        ; ADDRESS MUX AND SAMPLE
        NOP                ; WAIT FOR MUX TO SETTLE
        MOV    A, E        ; ADDRESS MUX AND HOLD
        MOV    M, A        ; HOLD ANALOG INPUT
STCON:   LXI    H, 8005H   ; ADDRESS START CONVERT
        MOV    M, A        ; START CONVERSION
DELAY:   LXI    H, 8004H   ; WAIT FOR CONV COMPLETE
        MOV    A, M        ; CHECK CC
        ANA    A           ; SET PARITY
        JPO    DELAY       ; CC?
        LHLD   8001H       ; TRANSFER 2 BYTE DATA
        PUSH   H           ; STORE DATA IN STACK
        DCR    D           ; COUNT DOWN SAMPLE COUNTER
        DCR    E           ; COUNT DOWN HOLD COUNTER
        MOV    A, E        ; TEST 8 CHANNELS
        JNZ    START       ; START NEXT CHANNEL
        HLT

```

**Occupying just 37 memory bytes**, this 8080 software routine is faster than the hardware it drives. Initialization, single-channel conversion and data storage require only 83  $\mu$ sec; MUX settling time accounts for the NOP.

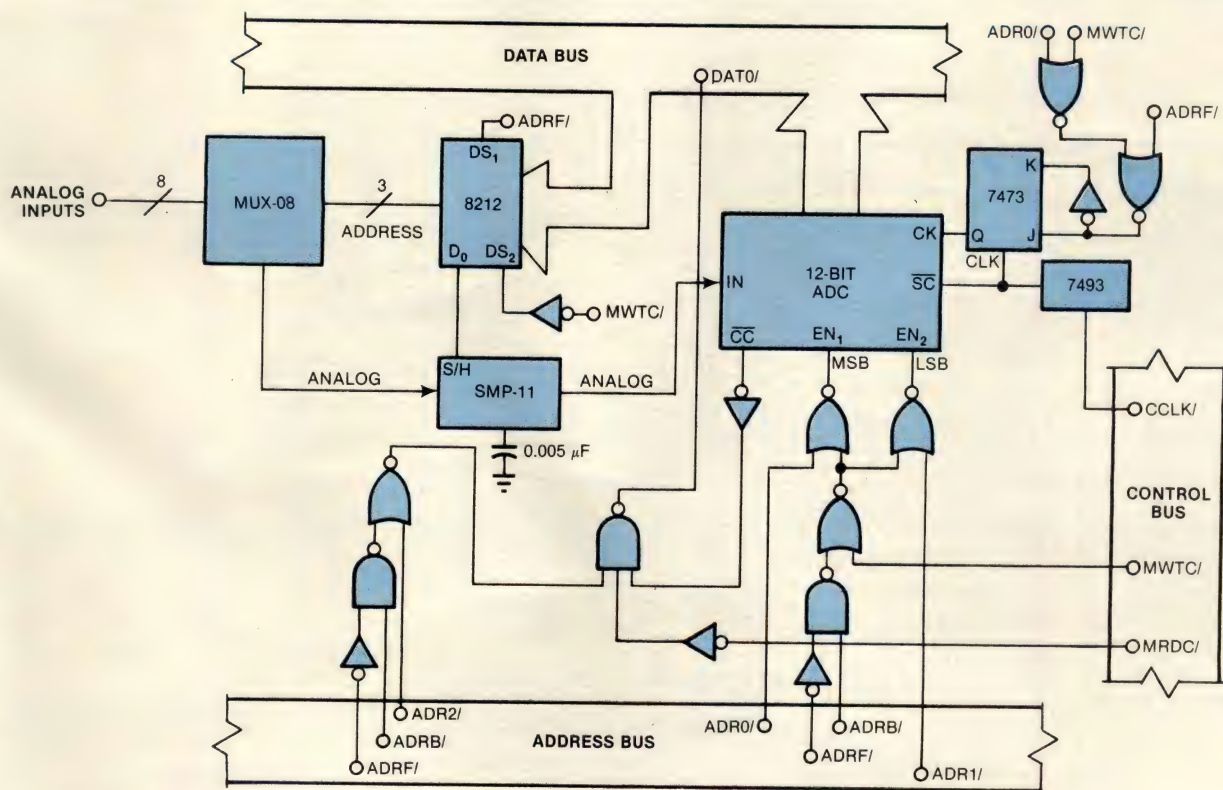

**Speedy data acquisition** results with this 8-channel, 12-bit system. Interfacing to an 8080 Microbus, it expands to 64 channels with the help of four MUX-16s.



## Design Ideas

approximation conversion (SAC) techniques—a method low in hardware costs and throughput rate but high in processor overhead. The third method, described here, centers on a fast 8080-based software driver coupled to a low-cost hardware design.

The circuit depicted in the **figure** interfaces with the 8080 Microbus and the SBC 80/10 bus. You can expand the 8-channel version shown to 40 inputs by using five MUX-08s or to 64 inputs by employing four MUX-16s.

The software routine is only 21 instructions long and occupies 37 bytes of memory. Memory mapping speeds it up: Initialization, single-channel conversion and data storage combined take only 83  $\mu$ sec (in fact, the design calls for a NOP to slow the software down so that the MUX can settle).

When addressed, the MUX selects and inputs an

analog channel to the S/H; from there, the signal goes to the 12-bit ADC for conversion. BEGIN starts loop initialization, setting registers D and E and the stack pointer (SP); then, START addresses the MUX and S/H. Conversion commences (STCON) with a LOW at SC, then loops in DELAY while waiting for completion.

Instruction LHLD 8001 loads the  $\mu$ P's H and L registers with the 2-byte ADC word, which PUSH H then pushes onto the stack. Counters D and E are decremented, and (if they are not zero) the program loops back to START, ready to input the next analog signal. After conversion of all eight channels, data is stored in memory locations 2000 through 200F. **EDN**

To Vote For This Design, Circle No 457


## Output Enable resolves bus contention

**Michael Bolan and Sandy Scherpenberg**  
Mostek Corp, Carrollton, TX

A microprocessor system can be plagued by

performance problems unless you give proper attention to timing parameters. One often overlooked timing-related problem, memory-bus contention, can produce symptoms ranging from catastrophic system damage to soft errors that don't yield to straightforward troubleshooting techniques.

*Continued on pg 234*

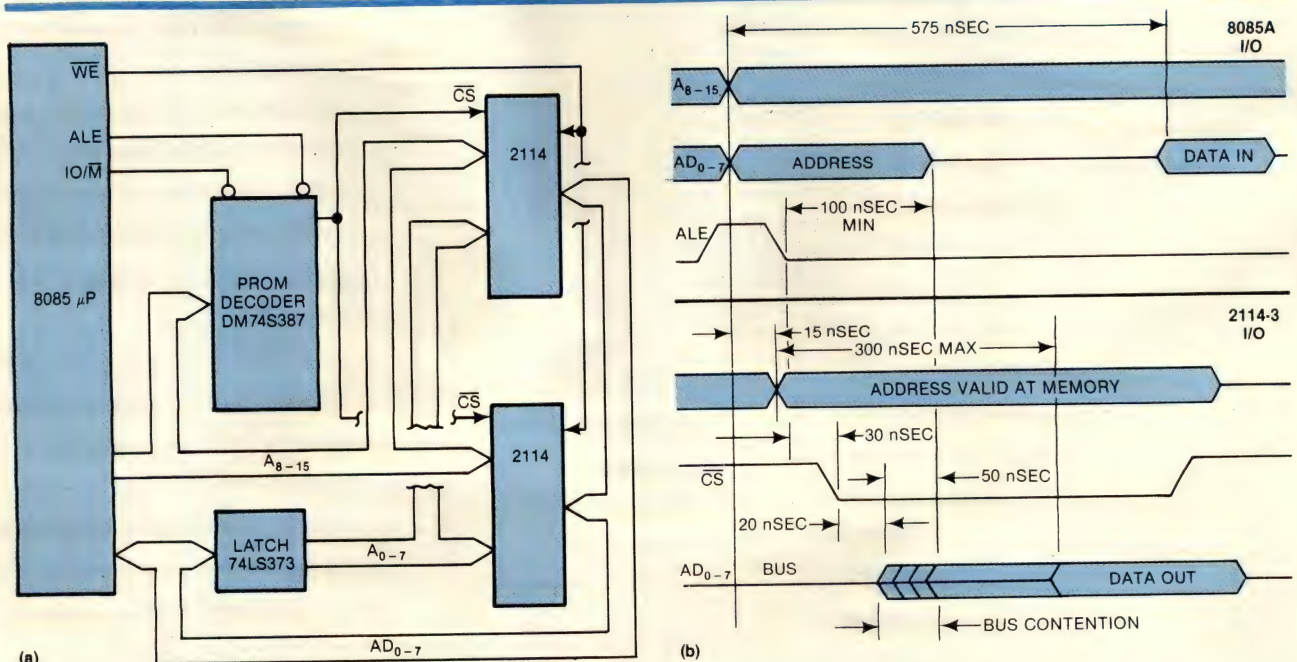

**Fig 1—Bus contention results** when two or more buffers on the address/data bus (a) are simultaneously enabled. Timing overlaps arising from device delays (b) can cause hardware/software failures.



# Aromat SE Amber Relays... a pure product of "relay efficiency."

$$\text{Relay efficiency}(\eta) = \frac{\text{The sum of all contacts' switching capacity (VA)}}{\text{Operating power(W) x Volume(cm}^3\text{)}}$$



## A breakthrough in relay efficiency.

The SE Amber relay's key to higher efficiency lies in greater miniaturization coupled with high reliability and greater switching capacity.

### High sensitivity in small size.

$$\left[ \frac{\text{Operating power (W)}}{\text{x Volume(cm}^3\text{)}} \right]$$

The SE Amber relay's 4-gap balanced armature delivers a highly efficient polarized magnetic circuit—sensitive enough to be driven directly by an IC, in a space 28L x 12W x 10H mm.

### Sensitivity

Pick-up power	100 mW
Nominal operating power	200 mW

### Dimensions

Volume	28L x 12W x 10H mm	
	1.102 x .472 x .394 inch	
Header area	336mm <sup>2</sup>	.521 inch <sup>2</sup>
Height	10mm	.394 inch

### Wide switching range.

$$\left[ \frac{\text{The sum of all contacts' switching capacity (VA)}}{\text{}} \right]$$

Switching is possible from 100μA 100mV DC to 4A 250V AC, thanks to the 4-gap balanced armature system and special multi-layer clad contacts. A single SE relay can

handle maximum and minimum switching simultaneously.

### • High reliability and long life.

The balanced armature system with permanent magnets gives larger contact pressure. Bifurcated contacts and lower contact bounce add to contact reliability and expected contact life.

### • Amber design and construction.

Designed for automatic wave soldering and cleaning, the sealed SE Amber relay performs reliably under conditions where hydrogen sulfide, silicone and ammonia fumes prevail.

### • High vibration/shock resistance.

The balanced rotating armature provides great resistance

to shock and vibration. Vibration resistance: 10 to 55G (amplitude: 3mm) Shock resistance: 50G (11msec.).

### • Varied contact arrangement.

SE relays are available with bifurcated contacts in 2a2b and 4a contact arrangements.

### • Multiple latching.

2-coil latching types are available, in addition to single side stable types. Single SE relays have a latching capability with multiple contacts, one contact can control the circuit while the other can switch the load simultaneously.

### • Low thermal electromotive force.

Because the SE relay has

completely separate coil and contact chamber areas, extremely low thermal electromotive forces are possible.

### • Dual in-line package arrangement.

This 2-track terminal arrangement allows easier component insertion, easier layout and identification of terminal locations, and simpler in-line checking.

### Relays for Advanced Technology



**Aromat**

Member of Matsushita Group

### Aromat Corporation:

250 Sheffield Street  
Mountainside, NJ 07092  
(201) 232-4260


### Mid-Western Office:

311 Lively Blvd.  
Suite 1  
Elk Grove Village, IL 60007  
(312) 593-8535

### Western Office:

10400 North Tantau Avenue  
Cupertino, CA 95014  
(408) 446-5000

Contact Your Aromat Representative  
or Distributor Today.

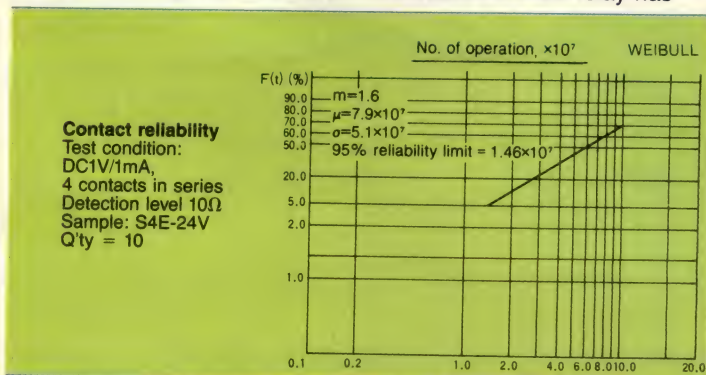

See us at Booth #2315, 2317, 2319/Electro '80 Boston, MA/May 3-15

For more information, Circle No 152



# THE BEST ADC80 YOU

## WE CAN FILL ALL YOUR ADC80 ORDERS IMMEDIATELY FROM STOCK.

Coming up with a vastly improved ADC80 is one thing; making sure that it's readily available in quantity is quite another. Analog Devices has done both.

Our ADC80 is a complete 12 bit successive approximation analog-to-digital converter that includes an internal clock, reference and comparator. It needs no external components to perform a 12 bit

accurate A/D conversion in only 25  $\mu$ s. To make it the best ADC80 you can get, we added lots of improvements. First, we only used half as many chips, so it's much more reliable. Then, we used a monolithic D/A chip so we can guarantee no missed codes over a wider temperature range. Ours also consumes less power, and the reference output can supply up to 1.5 mA of current to external circuitry. We even have a 40ns status delay that guarantees valid data at the end of a conversion. After we made a better ADC80, we made darn sure we put plenty into stock. So you can get as many as you need. Now.




## DESIGNED AND BUILT TO LAST FAR LONGER.

Our ADC80 is not only better, it's more reliable. Not only does it have half as many chips (17 versus 34), but we've reduced the number of bond wires by 63% from 177 to 73. We've even improved the packaging with a "SLAM" ceramic dual-in-line package that eliminates the substrate. The result in terms of calculated MTBF is that ours will far outlast theirs.



# CAN GET, YOU CAN GET.

## AD vs. BB

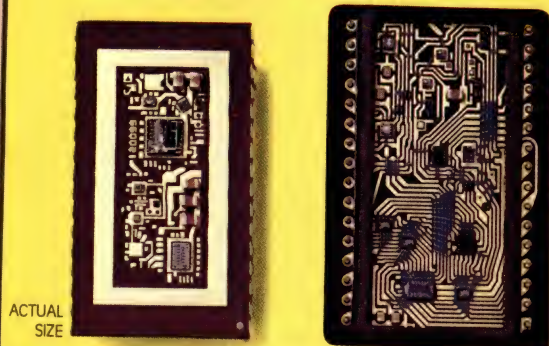

### Number of Chips

17 34

### MTBF (failures/million hrs.)\*

15.1 24.8

### Temperature Range for No Missing Codes

-25°C to +85°C 0°C to +70°C

### Power Dissipation

800mW 950mW

### Max. Reference Output Current

1.5mA 0.2mA

Chip count determined from actual devices. \*MTBF's calculated per MIL-HNBK-217C. Other BB data taken from published data sheet.

## PERFORMANCE SPECS THAT ARE SPECTACULAR.

Our ADC80 clearly beats the competition (see chart) in terms of chip count, calculated MTBF, temperature performance, power consump-

tion and reference output current. And our 40ns status delay allows you to latch output data directly into a data register without losing the 12th bit. This is a real cost saver, because it means you don't have to add external status delay circuitry.

## IF YOU LIKE OUR ADC80s, YOU'LL LOVE OUR DAC80s.

If you're looking for a pin-for-pin replacement for the industry standard DAC80 12 bit D/A converter, look no further. Our DAC80 features an internal output amplifier that settles to  $\pm 0.01\%$  in  $3 \mu s$  (voltage models), guaranteed monotonicity over the 0 to +70°C temperature range, and a low profile ceramic dual in-line package. The same innovative design techniques used in our ADC80s are also incorporated in our DAC80s. So we also have the best DAC80, with fewer chips, high reliability, better temperature drift, and lower power consumption. You'll even love the price of our DAC80 (starting at \$18.50 in 100's). And like our ADC80s they're in great supply (and demand).

For more information on our ADC80s and DAC80s, get in touch with Doug Grant or Don Travers at (617) 935-5565, or write Analog Devices, Inc., P.O. Box 280, Norwood, MA 02062.

### DAC 80

Number of Chips	3
MTBF (failures/million hrs.)*	9.3
Max. Total Bipolar Drift	$\pm 20 \text{ ppm}/^\circ\text{C}$
Max. Reference Output Current	2.5mA
Max. Power Dissipation	925mW

 **ANALOG  
DEVICES**

## WAY OUT IN FRONT.

Analog Devices, Inc., Box 280, Norwood, MA 02062; East Coast: (617) 329-4700; Midwest: (312) 894-3300; West Coast: (714) 842-1717; Texas: (214) 231-5094; Belgium: 031/37 48 03; Denmark: (02) 84 58 00; England: 01/94 10 46 6; France: 687-3411; Germany: 089/53 03 19; Japan: 03/26 36 82 6; Netherlands: 076/879 251; Switzerland: 022/315760; and representatives around the world.

For more information, Circle No 153



# Design Ideas

Bus contention occurs when two or more output buffers on the same line are simultaneously enabled and can prove particularly troublesome when the data bus is bidirectional and address multiplexed. The resulting large current transients can disturb adjacent circuits or cause power-supply fluctuations sufficient to destroy memory-data integrity.

Fig 1a shows an 8085 microprocessor system, with time-multiplexed address/data functions, that employs a PROM for memory selection and a latch for separating the lower eight addresses from the data bus. The system's memory consists of a matrix of 2114-3 1k×4 static RAMs, which access in 300 nsec. The PROM is inhibited by the IO/M and ALE signals until address decoding is established. It then generates a clean chip-select signal ( $\overline{CS}$ ) for the selected memory device within 30 nsec of the ALE's trailing edge. The address arrives at the appropriate 2114 delayed 15 nsec because of the latch's propagation delay, shown in Fig 1b.

Once  $\overline{CS}$  arrives at the memory device,  $\overline{CS}$ -to-data-active time begins, and the output can become active in as little as 20 nsec. As a result, 50 nsec (30+20) after the trailing edge of ALE, the output buffers become active (low impedance) onto the address/data bus. However, because the 8085's

address-hold time is 100 nsec min from ALE, the bus is in contention for 50 nsec.

You can resolve this contention problem by adding some logic to delay the  $\overline{CS}$  signal. However, for some applications this approach could degrade access—requiring the use of a higher performance memory device. The circuit board would also suffer the loss of potentially valuable real estate to the extra logic devices.

A better solution involves using a memory device with an output-enable function ( $\overline{OE}$ ): Fig 2a shows the 8085 memory interface with an MK4118 substituted for the 2114s.  $\overline{CS}$  and address signals are handled exactly as before; however, the read ( $\overline{RD}$ ) signal now connects directly to the memory to provide control of the output buffers. The timing diagram (Fig 2b) illustrates how the  $\overline{OE}$  control function holds the memory output inactive for 130 nsec min until the output is activated by the microprocessor. Because the  $\overline{OE}$  access time is faster than the  $\overline{CE}$  access time, no performance loss results.

EDN

To Vote For This Design, Circle No 458

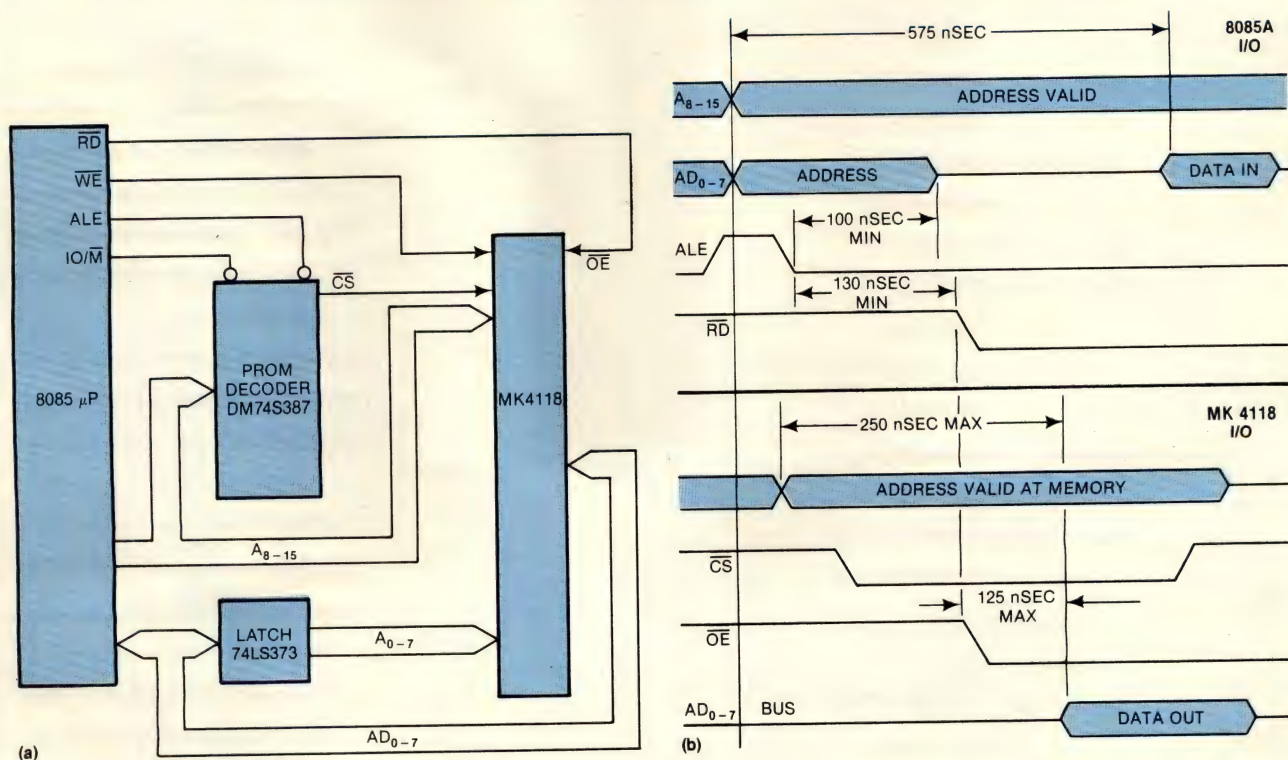


Fig 2—By substituting an MK4118 for the 2114 memory chips (a) and employing the  $\mu$ P's  $\overline{RD}$  function as an output enable ( $\overline{OE}$ ), you hold the memory's output inactive (b); bus contention thus can't occur.



# Split Personality.



Primary side  
Barrier  
Secondary side



Recognized Component  
Underwriters Laboratories, Inc.

## Our ingenious split bobbin transformer design gives you high isolation...at low cost.



Ordinary transformers have to be shielded to get high isolation. Our transformers are different...and better. By separating the primary from the secondary windings — through our split bobbin design — we achieve high isolation at lower cost. That's what you should expect from the world leader in off-the-shelf transformers and chokes. And that's why thousands of companies swear by Signal for quality, value and complete satisfaction. Wide choice of secondary outputs available on all types.

### PRONTO DELIVERY

We ship your prototypes in 48 hours. These three distinct, hard-working personalities are always available for *Pronto* delivery.

### SPLIT/TRAN®


2500 V RMS HIPOT.  
Non-concentric windings and low capacitive coupling. Available with 115V or dual 115/230V primaries. Split secondary windings can be series or parallel connected.



### free



Our complete catalog with over 1,000 standard transformers and chokes, from 1 to 10,000 VA. All are available from stock, and all at low, factory-direct prices.

Write or call:  
Signal Transformer Co., Inc.  
500 Bayview Ave.,  
Inwood, NY 11696  
Tel.: (516) 239-7200  
Or (516) 239-4510





### FLATHEAD®

For optimum powering of 1" space PC boards. Delivers 6 VA in less than .085" height. (Semi-Toroidal windings.)



### 2-4-1®

2500 V RMS HIPOT.  
The signal for a 50% cut in transformer size & weight at significantly less cost.



# signal

TRANSFORMER

For more information, Circle No 154



## Envelope generator has isolated timings

**Bonaventura A Paturzo**

Xerox Corp, El Segundo, CA

This envelope-generator design (unlike most equivalent circuits published) provides truly independent attack, sustain and decay adjustment—without affecting output amplitude. Gated by IC<sub>1</sub> and IC<sub>2</sub>, the CMOS switches (IC<sub>3</sub>) isolate the attack and decay adjustments, and the R<sub>2</sub>/IC<sub>3A</sub> combination permits post-decay-effect adjustment by controlling circuit recovery time. The clocked JK flip flop (IC<sub>6</sub>) allows one and only one output for each positive-going input transition.

At rest, IC<sub>3A</sub> is enabled, shunting to ground (through R<sub>2</sub>) any charge on C<sub>1</sub>. Triggering disables IC<sub>3A</sub> and enables IC<sub>3B</sub>, initiating the attack function—the charging of C<sub>1</sub> through R<sub>9</sub>. When the voltage on C<sub>1</sub> reaches 2.5V (set by the R<sub>4</sub>/R<sub>5</sub> ratio) the comparator (IC<sub>4</sub>) switches HIGH. The R<sub>7</sub>C<sub>2</sub>Q<sub>1</sub> stage then generates a negative-going pulse, triggering IC<sub>5</sub> (a 555 configured as a monostable whose ON

(sustain) time is set by R<sub>10</sub>). While IC<sub>5</sub> is HIGH, all of the CMOS switches (IC<sub>3</sub>) are disabled, holding (sustaining) C<sub>1</sub> at the 2.5V level. When IC<sub>5</sub> times out, IC<sub>3C</sub> is enabled, starting the R<sub>3</sub>C<sub>1</sub> decay time cycle. When the trigger returns to ZERO, IC<sub>3A</sub> is re-enabled, bleeding-off C<sub>1</sub>'s remaining charge through R<sub>2</sub>.


Attack and decay times are simple functions of their respective RC time constants. Sustain time, however, is defined by

$$T_S = 1.1(R_{10} + R_{11})C_3.$$

The circuit requires no precision components, although low-leakage, temperature-stable capacitors (for C<sub>1</sub> and C<sub>3</sub>) are recommended for achieving repeatable operation. Additionally, use a high-impedance, dc-coupled buffer to couple the output to an external circuit—unless, of course, that circuit introduces negligible loading of C<sub>1</sub>.

**EDN**


To Vote For This Design, Circle No 459

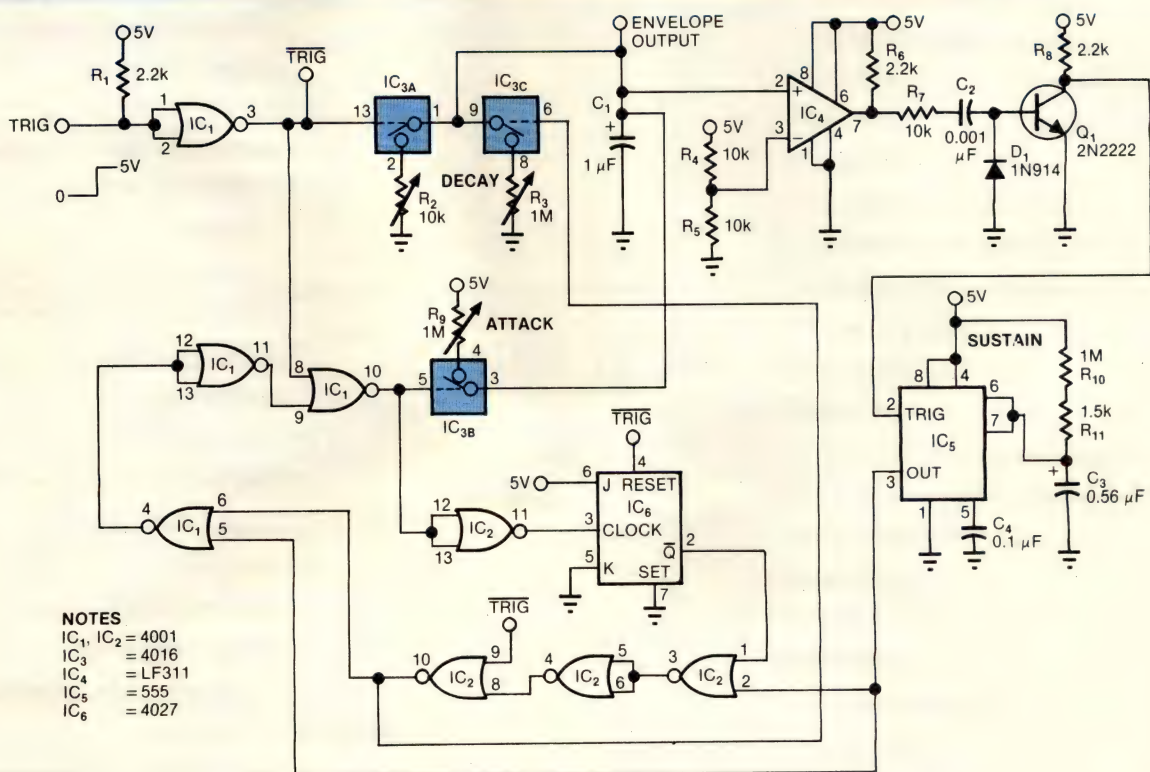

**NOTES**  
 IC<sub>1</sub>, IC<sub>2</sub> = 4001  
 IC<sub>3</sub> = 4016  
 IC<sub>4</sub> = LF311  
 IC<sub>5</sub> = 555  
 IC<sub>6</sub> = 4027

**CMOS switches** isolate the independently adjustable attack, sustain and decay times of this envelope generator. Determined by the 5V supply and the R<sub>4</sub>/R<sub>5</sub> ratio, the output swings between 0 and 2.5V—even for zero sustain times.





**Beryllium copper  
helps Anne's hair look  
this good every day.**

Beryllium copper isn't in her shampoo. It's in the switch of her hair dryer, which she turns on and off hundreds of times a year. Without beryllium copper contact springs, it wouldn't be as reliable.

Beryllium copper stands up to tough use. It upgrades the reliability of a product at reasonable cost. No other material can match its unique combination of properties.

KBI beryllium copper or nickel alloy has good conductivity along with very high tensile strength, excellent mechanical and spring properties, plus good corrosion and fatigue resistance. Some

beryllium copper alloys will operate at temperatures from  $-320^{\circ}$  to  $800^{\circ}\text{F}$ .

Because these alloys are easily formable before hardening, they're ideal for producing complex shapes, and can save you manufacturing time over other materials. The availability of many special forms also cuts manufacturing costs.

Send for a booklet that tells you all you need to know about these materials. Circle the number or write P.O. Box 1462, Reading, PA 19603

**KAWECKI BERYLCO INDUSTRIES, INC.**





# Your choice!

For 10 years, designers of

**UNINTERRUPTABLE POWER SUPPLIES  
INDUCTION HEATING INVERTERS  
D.C. CHOPPERS & A.C. DRIVES**

have chosen distributed gate thyristors from

**WESTCODE** semiconductors.

We know those applications.



**Now** triple diffused, single element  
550 volt Power Transistors are available  
from the Leaders in Fast-Switching  
Power Semiconductors.

**200A PEAK,  
100 AMPS  
CONTINUOUS.  
GAIN OF 10**

**50A PEAK,  
25 AMPS  
CONTINUOUS.  
GAIN OF 10**

**450A PEAK,  
300 AMPERES  
CONTINUOUS.  
GAIN OF 10**

**300A PEAK,  
200 AMPS  
CONTINUOUS.  
GAIN OF 10**

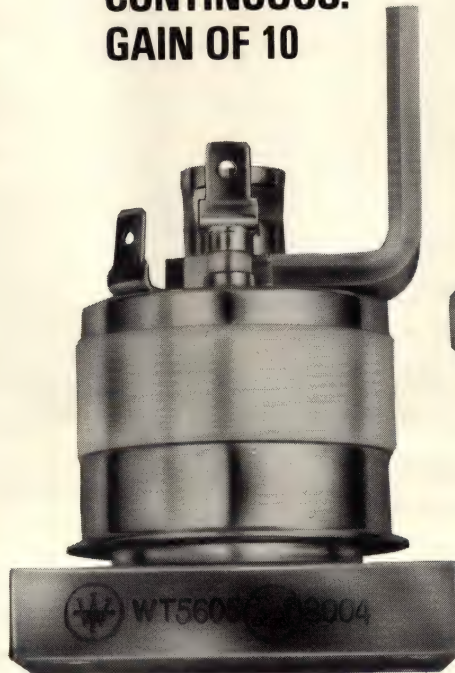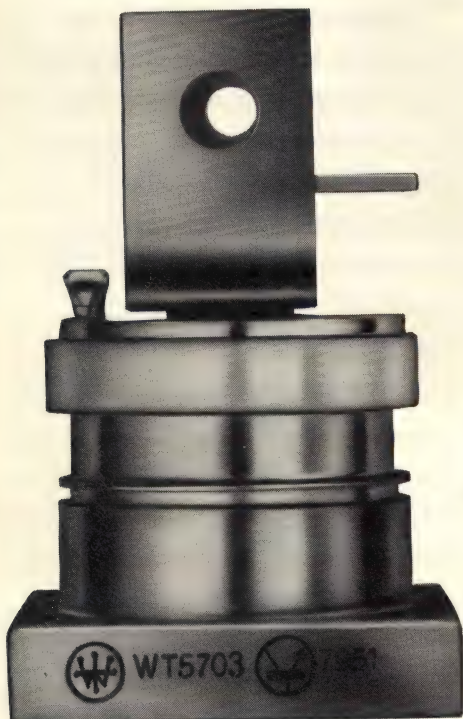

**FREE  
WHEELING  
DIODES  
AVAILABLE  
WITH  
FAST,  
SOFT,  
RECOVERY**

**WESTCODE**   
semiconductors

Box 159, Richford, Vt. 05476 Telephone (514) 263-1028

For more information, Circle No 155




# The Shortest Line Between Design Points is Multiwire.\*



**MULTILAYER**

Regardless of what design technique you use — even with a computer aided system — designing multilayer PC boards can be a guessing game. Many times, in the last 5% of the routing, you find yourself up a "blind alley" and you have to go back to "start".

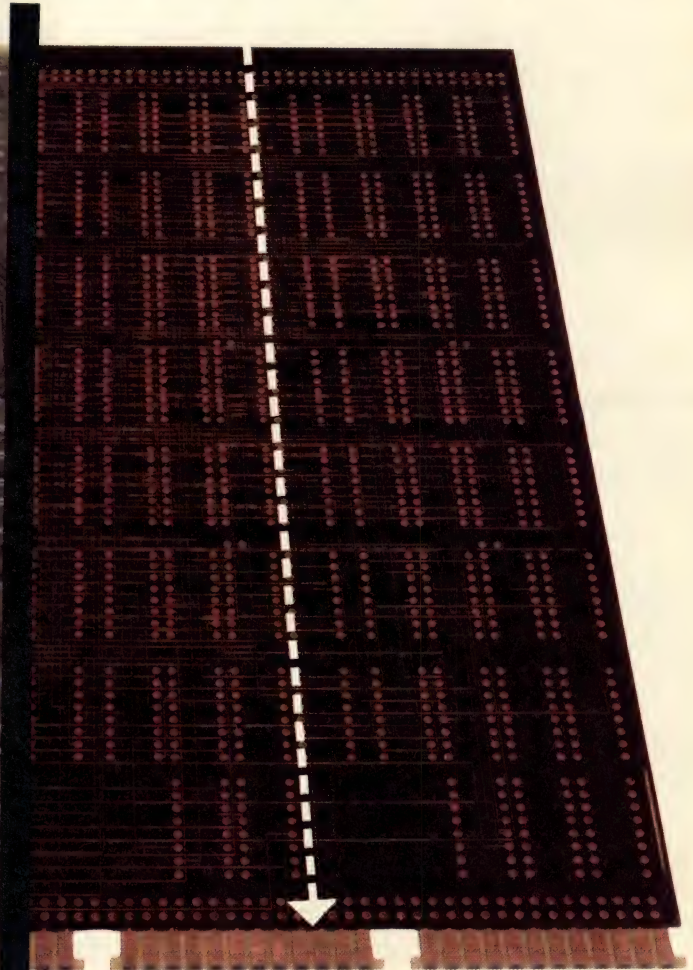

**MULTIWIRED**

With Multiwire, you can easily avoid such blind alleys . . . for design-time savings in your circuit boards. Routing is under complete computer control. All you have to do is prepare artwork for the power and ground planes, the net or "from-to" list, and a fabrication print showing component location and board configuration. The Multiwire design program takes over from there. Results: your design time is cut. And, when design changes are needed, Multiwire lets you make them . . . quickly, easily. Electrical characteristics are consistent and controllable, inspection costs are cut and production yields go up.



A typical example of the circuit density achievable with Multiwire circuit boards.

Why wait? For complete details write or call today. Multiwire, 31 Sea Cliff Avenue, Glen Cove, NY 11542. Phone (516) 448-1307.

\*Multiwire is a U.S. registered trademark for the Kollmorgen Corporation discrete wired circuit boards.


**MULTIWIRED**  
DIVISION  
KOLLMORGEN CORPORATION




# Small economy size.

Generally, when the size goes down, the cost goes up. Not at C. Itoh. You can get the precision Model 210 (roll feed) or 210S (sprocket feed) dot matrix impact printer for a lot less than you're paying for comparable printers. But just because the price is low doesn't mean the quality is. Both are 2.4 LPS two-color printers capable of printing 5 x 7, 7 x 7 and 9 x 7 matrixes from a highly reliable seven-wire head. Requiring only 24 VDC power, these compact printers are the perfect OEM unit for POS cash registers, home computers, data loggers, electronic calculators and general peripherals ... anywhere where small size and low price make a difference. Measuring only 3.1" H x 4.8" W x 5.8" D, the Model 210 prints 26-35 columns in 2.6"

## The 210 from C. Itoh.

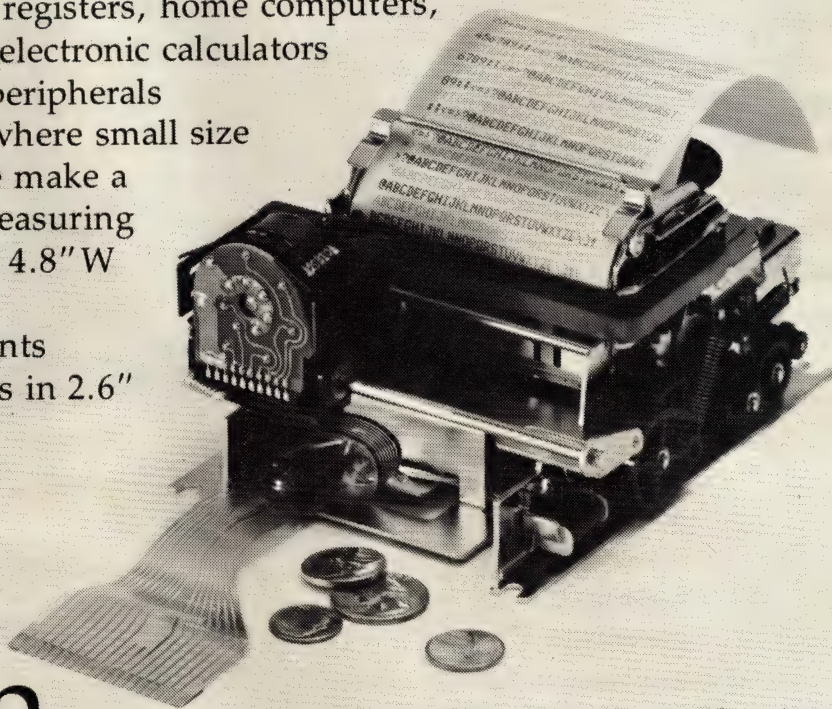

of printable area; the 210S prints 22-30 columns in 2.2" of printable area. Economy size. Economy price. Of course. It's from C. Itoh.



### **C. Itoh Electronics, Inc.**

*C. Itoh  
means excellence  
in printers.*

5301 Beethoven Street, Los Angeles, California 90066  
Call: (213) 390-7778 • Telex: WU 65-2451  
East Coast  
666 3rd Avenue, Chrysler East Bldg., N.Y., NY 10017  
Call: (212) 682-0420 • Telex: WU 12-5059

*C. Itoh Electronics is part of the C. Itoh & Co. Ltd. world-wide trading organization.*



# Feature Products

## Monolithic music makers croon lullabies, sound alarms


If you hear music and there's no one there, you could be listening to a 7910 Series IC. Six of the eight standard preprogrammed chips in this series offer renditions of "Greensleeves," "Home on the Range," "Mary Had a Little Lamb" and several other tunes. Additionally, four of those parts can imitate a door chime and emit a beeping alarm.

The family's remaining two devices emulate Westminster chimes. Designed for use in toys, music boxes and clocks, the chips are also available custom programmed with your own musical selection.

### Virtuoso performance

The manufacturer has packed considerable potential virtuosity into these monolithic CMOS music makers. In addition to music/alarm-select logic, a master oscillator and an output preamp, you get two envelope generators (main melody and accompaniment) and several ROMs:

- The melody ROM is the heart of the devices. Twelve bits wide and 128 words long, it can store one or two tunes with a total length of 128 notes and rests. The note durations range from one-sixteenth through whole, and frequency range spans  $2\frac{1}{2}$  octaves in pure or even temperament.
- The tempo ROM can supply 16 different cadences, ranging from prestissimo (as fast as possible) to largo (slow

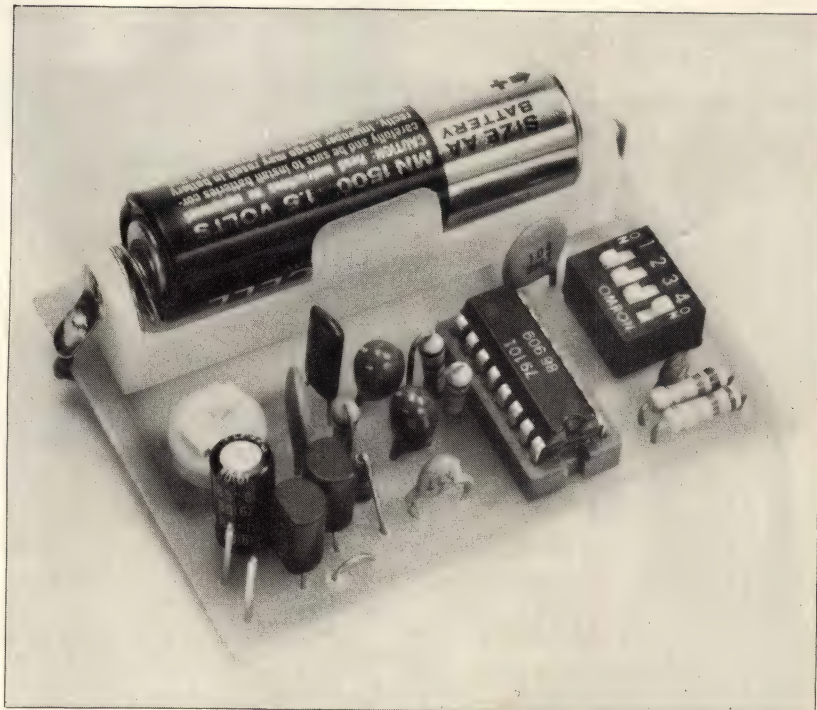

Two melodies, a door chime and a beeping alarm emerge from a 16-pin 7910 Series IC, shown here mounted in its evaluation board. The chip contains separate main-tune and accompaniment generators and several ROMs that allow it to play tunes of up to 128 notes over a wide range of tempos.

and solemn), with any two cadences appearing in the same tune.

- The control ROM (in concert with a 6-bit address counter) not only keeps track of the tunes' starting addresses, but also provides for up to eight repeats within a piece.

### Operate on 1.5V

Housed in 16-pin DIPs, the 7910 devices operate over  $-10$  to  $+55^{\circ}\text{C}$  and require a single 1.5V battery. The chips' standby (oscillator off) current is only  $2\text{ }\mu\text{A}$  typ; with the oscillator on, they need just  $70\text{ }\mu\text{A}$  typ plus whatever current

the outboard audio-driver devices require. Each chip sports a 2-terminal true push/pull output capable of sourcing and sinking at least  $150\text{ }\mu\text{A}$  of base current for the drivers.

You can evaluate the 7910 Series' performance with a board available from the manufacturer. Pick a chip, add a battery and speaker and listen—the board contains the other necessary components.

The board (without chip, battery or speaker) costs \$14. Standard preprogrammed chips cost \$3.50 (10).

**Epson America Inc, 23844 Hawthorne Blvd, Torrance, CA 90505. Phone (213) 378-2220.**

**Circle No 451**



## Feature Products

# Ultraminiature liquid electrolytics sport high electrostatic capacitance


Would you believe a capacitor that packs 10F in 0.3 in.<sup>3</sup>? That's exactly what Gold Series devices provide. Despite their high capacitance, though, these devices are compatible with pc-board mounting requirements—a 10F unit measures 1.46 in. long and only 0.51 in. in diameter.

The units capitalize on a proprietary construction technique, based on the use of a liquid electrolyte and double-layer foil, to achieve the high values, ranging from 1 to 100F.

Specifications for a 10F unit include rated working voltage of 1.6V dc,  $\pm 20\%$  tolerance, 1 $\Omega$  internal impedance (at 1 kHz and 20°C), minimum leakage current of 1 mA (after 10 min at 20°C and rated voltage), operating range of -20 to +70°C and high reliability—less than 3% failure rate after 50,000 hrs (at rated voltage and 40°C).

### Backup capability

While Gold Series units offer

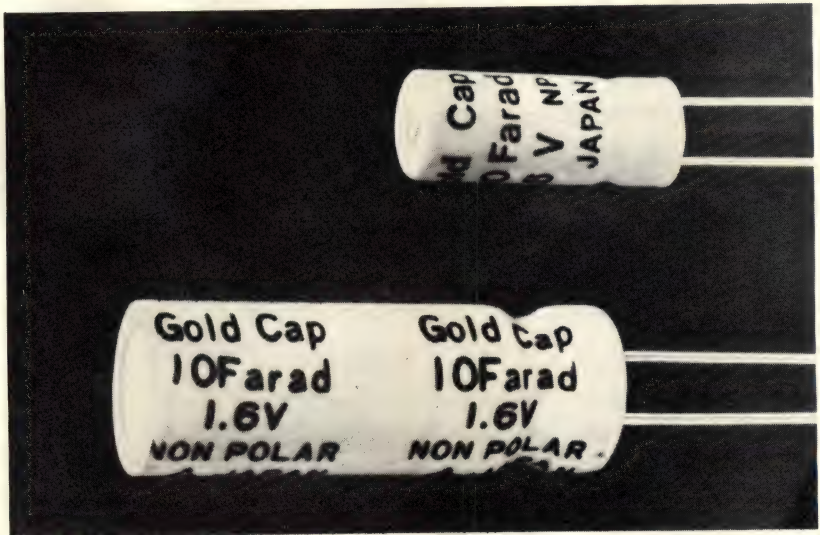

High capacitance in a small package highlights the Gold Series of electrolytic capacitors. A 10F device, for example, measures 1.46 in. long  $\times$  0.51 in. in diameter—dimensions that qualify the units for pc-board mounting.

improved performance in many typical capacitive applications (long-time-constant circuits, for example), they also perform as backup sources for RAMs in case of power failure.

To serve such applications, you can connect four 10F units in series to obtain a 2.5F capacitor with a voltage rating

of 6.4V dc. Under a 1-mA load, this combination requires more than 1 hr to discharge to 2V.

\$1 (10,000) for 10F unit. Delivery, stock to 12 wks ARO.

**Panasonic Co, Electronic Components Div, 1 Panasonic Way, Secaucus, NJ 07094. Phone (201) 348-7173.**

Circle No 452

## NEXT TIME

In EDN's May 5 issue, look for a preview of key sessions and product exhibits at NCC '80. This year's National Computer Conference promises to be bigger and better than ever, and EDN will be there. Also look for feature articles on

- The latest serial printers, complete with a handy clip-out chart
- The next step in EDN's hands-on  $\mu$ C Design Series exploration of analog  $\mu$ Ps
- A handy programmable-calculator program for calculating the noise bandwidth of filters

- Spec'ing CRTs for use in video terminals
- The creation and use of microcode for mini-computers

... and much more. Look, too, for news round-ups on developments in PROM programmers and color CRTs, plus a report on the latest action in 8-in.-hard-disc standards, plus our regular  $\mu$ Computerist Corner and Design Ideas departments. You can't afford to miss this issue!

**EDN: Everything Designers Need**



# Meeting industry display needs for three decades


See us at  
**ELECTRO '80**  
**BOOTH 2444-2448**



**IEEE**



## clock oscillator for Zilog Z8000 or Z80A microprocessor



### Model K1160A crystal clock oscillator

This thick film hybrid oscillator with active pull-up provides the precise waveform required to drive the Z8000 or the Z80A.


The single DIP saves board space needed by up to 17 discrete components it replaces, and eliminates wasted production man-hours spent analyzing oscillator circuits and matching crystals to circuit components.

Plug the K1160A into your Zilog microprocessor circuit design and forget your crystal oscillator problems.

Circle No. 353

Intel and 8041/8741 are trademarks of Intel Corporation. Zilog and Z8000 are trademarks of Zilog, Inc. (M) and Motorola are trademarks of Motorola Inc.

## clock oscillator for Intel 8041/8741 universal programable interface element



### Model K1150A crystal clock oscillator

This thick film hybrid crystal clock oscillator generates the two complementary CMOS compatible waveforms required to drive the Intel 8041/8741.

The single-package oscillator concept not only saves board space, it also saves labor and overhead costs all down the line. Plug the K1150A into your universal interface design.



#### COMPONENT PRODUCTS

2553 N. Edgington  
Franklin Park, Ill. 60131  
312/451-1000  
TWX: 910-227-0799  
Telex: 025-4400

Circle No. 354

## Feature Products

# Low-cost dot-matrix printer delivers high-quality output



High-quality printing and text-processing features make Centronics' Model 737 a versatile dot-matrix impact printer.

You don't usually associate correspondence-quality printing with dot-matrix impact printers, but Model 737 challenges that viewpoint. Its high-density dot-matrix printhead, printing characters in an  $n \times 9$  array, not only handles the pesky true-descender problem with style, but also furnishes true underlining capability and prints superscripts and subscripts as well.

Of course, this unit's magic isn't all in its printhead; bidirectional paper control makes precise dot placement a breeze.

Obviously intended for the text - processing marketplace, the 737 outputs 80 cps while furnishing proportional spacing and right-margin justification.

Users can also select character density: The unit provides both 10 and 16.7 cpi. A full 96-character ASCII set ensures the printer's ability to express whatever needs expressing.

Because not everyone's text-processing requirements are the same, the 737 handles three paper types with equal ease—letterhead, fanfold and roll. For users with a lot to say, one command lets the printer output 132 columns in the same space normally required for the 80-column format. \$995 (OEM). Delivery, 60 days ARO.

**Centronics Data Computer Corp., Hudson, NH 03051.  
Phone (603) 883-0111.**

Circle No. 453



# Match with MSC custom memories

...and microcomputers too. Standard off-the-shelf systems may not match up to your special needs. MSC can design and produce a memory system using the best technology, parts, and form factors available to meet your specific operating requirements. Our custom engineering capabilities also extend to microcomputers designed to an industry standard bus.

**Multiple Sourcing** MSC custom products utilize components from a wide range of industry sources, resulting in less delays in production, replacement, and delivery.

**Full Spec Components** We use only full specification components, and test stringently to assure reliability and remove defective elements.




Monolithic  
Systems corp

gently to assure reliability and remove defective elements.

**Design Time Savings** Our custom products relieve you of unnecessary design and engineering time, allowing you to direct your resources toward other important areas.

**Cost Savings** The security of a fixed-price contract protects against cost overruns, while MSC experience assures best-value component selection. For more information on MSC custom products and other Monolithic Systems Corp. products and systems, please contact us at 14 Inverness Drive East, Englewood, Colorado 80112. (303) 770-7400. Telex: 45-4498.

## Extending the limits of information.

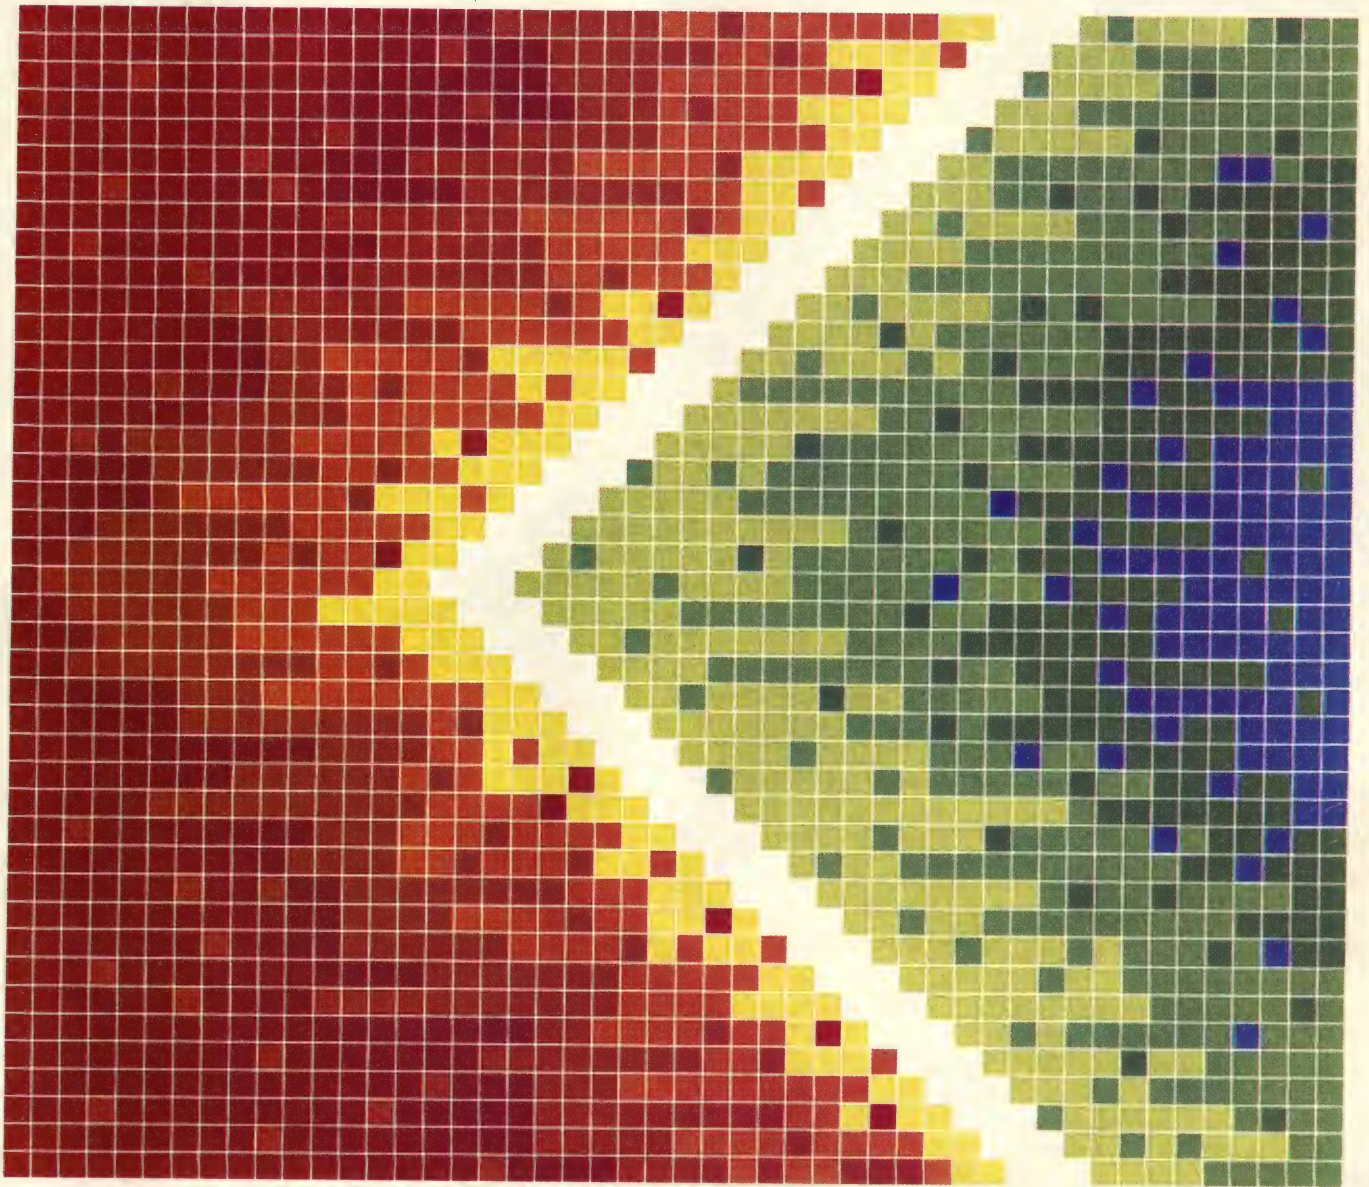

MSC Regional Sales Offices: **Eastern Region** 1101-B9 State Road, Princeton, NJ 08540, (609) 921-2240, **Central Region** 7200 East Dry Creek Road, Suite #B203, Englewood, CO 80112, (303) 773-1060, **Western Region** 49 South Baldwin, Suite D, Sierra Madre, CA 91024, (213) 351-8717

For more information, Circle No 158



# WHEN $\mu$ S COUNT, YOU CAN COUNT ON FTS.

We've pushed the state of the art in cesium beam technology a long way. High-performance FTS units are on airborne, shipboard, and mobile platforms and in the laboratory, with frequency accuracy of  $\pm 7 \times 10^{-12}$  and frequency stability of  $1 \times 10^{-13}$ . And FTS is unique, offering a 5-year cesium tube warranty.

Our no-charge instrument loan program (if warranty repairs require more than 30 days) will cut down time and costs at your end.

Now, FTS offers three configurations:

**FTS 4050** — Rack-mountable instrument designed for laboratory and field use, with outputs of 1, 5, and 10 MHz and 1 pps. Complete operating controls and monitors. \$22,000.

**FTS 4010** — Portable cesium clock (26.4 kg), with interchangeable battery packs, time-of-day clock, and outputs of 1, 5, and 10 MHz and 1 pps with digital delay. Fits under seat in commercial aircraft. \$29,000.


**FTS 5000** — Modular standard designed for low cost and systems flexibility. 1-pps and dual 5-MHz outputs. \$16,000 in quantity.

**Need quartz crystal oscillators, standard systems?** Our FTS 1000 offers aging of  $< 1$  day, phase noise of  $< -118$  dBc at 1 Hz, and term stability of  $< 1 \times 10^{-12}$ . \$1,700 in quantity. Products include the FTS 1100 and the FTS 1150 instrument, with aging of  $< 5 \times 10^{-12}$ . And, we're into Time and Frequency System special products.

Lease/purchase arrangements are available.

*Delivery in 30 days in most cases.*

## WE THINK IT'S ABOUT TIME YOU KNEW.




**FTS · FREQUENCY AND TIME SYSTEM**  
182 CONANT ST. DANVERS, MA 01923  
(617) 777-1255

For more information, Circle No 15

Call or write FTS Marketing for co

FTS is an ASUAG affiliate

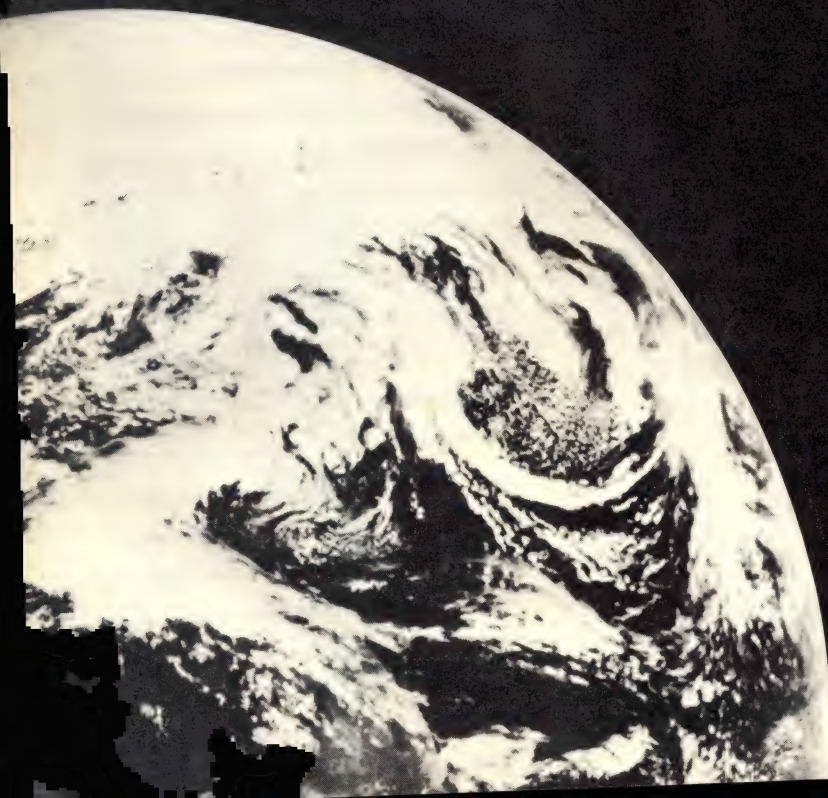



# Life expectancy of General Electric long-life hermetically sealed relays:

# 100 MILLION OPERATIONS



When it comes to durability, General Electric long-life hermetically sealed relays will last for more than 100 million low-level signal switching operations. That's 10 times longer than the life of our standard commercial electro-mechanical relays.

This unprecedented dependability is the sum of specially engineered material systems and controls used throughout the assembly process. Result: GE long-life hermetically sealed relays are more durable and perform better because there are none of the old familiar problems such as material erosion, high contact resist-

ance and sticky contacts to cause early failure. In other words, relays may look the same but what's inside makes a big difference.

So for low-level applications that call for relays that won't quit on you, ask for GE long-life hermetically sealed relays. They're available in 1, 2, or 4 pole double-throw versions. Ten-to-one, you'll find they'll more than live up to your expectations.

Find out for yourself how tough they are. We'd like to send you one FREE to test in your own applications. Simply fill out the coupon and mail it to: General Electric Company, Relays, 792-52, Waynesboro, Virginia 22980. Or call (703) 949-1448.

For more information, Circle No 160

**General Electric Company**  
**Relays, 792-52**  
**Waynesboro, Virginia 22980**

**Yes! Please send me one FREE**  
**General Electric long-life hermetically**  
**sealed relay to test for myself:**

NAME \_\_\_\_\_

COMPANY \_\_\_\_\_

ADDRESS \_\_\_\_\_


CITY \_\_\_\_\_

STATE \_\_\_\_\_

ZIP \_\_\_\_\_

**GENERAL  ELECTRIC**



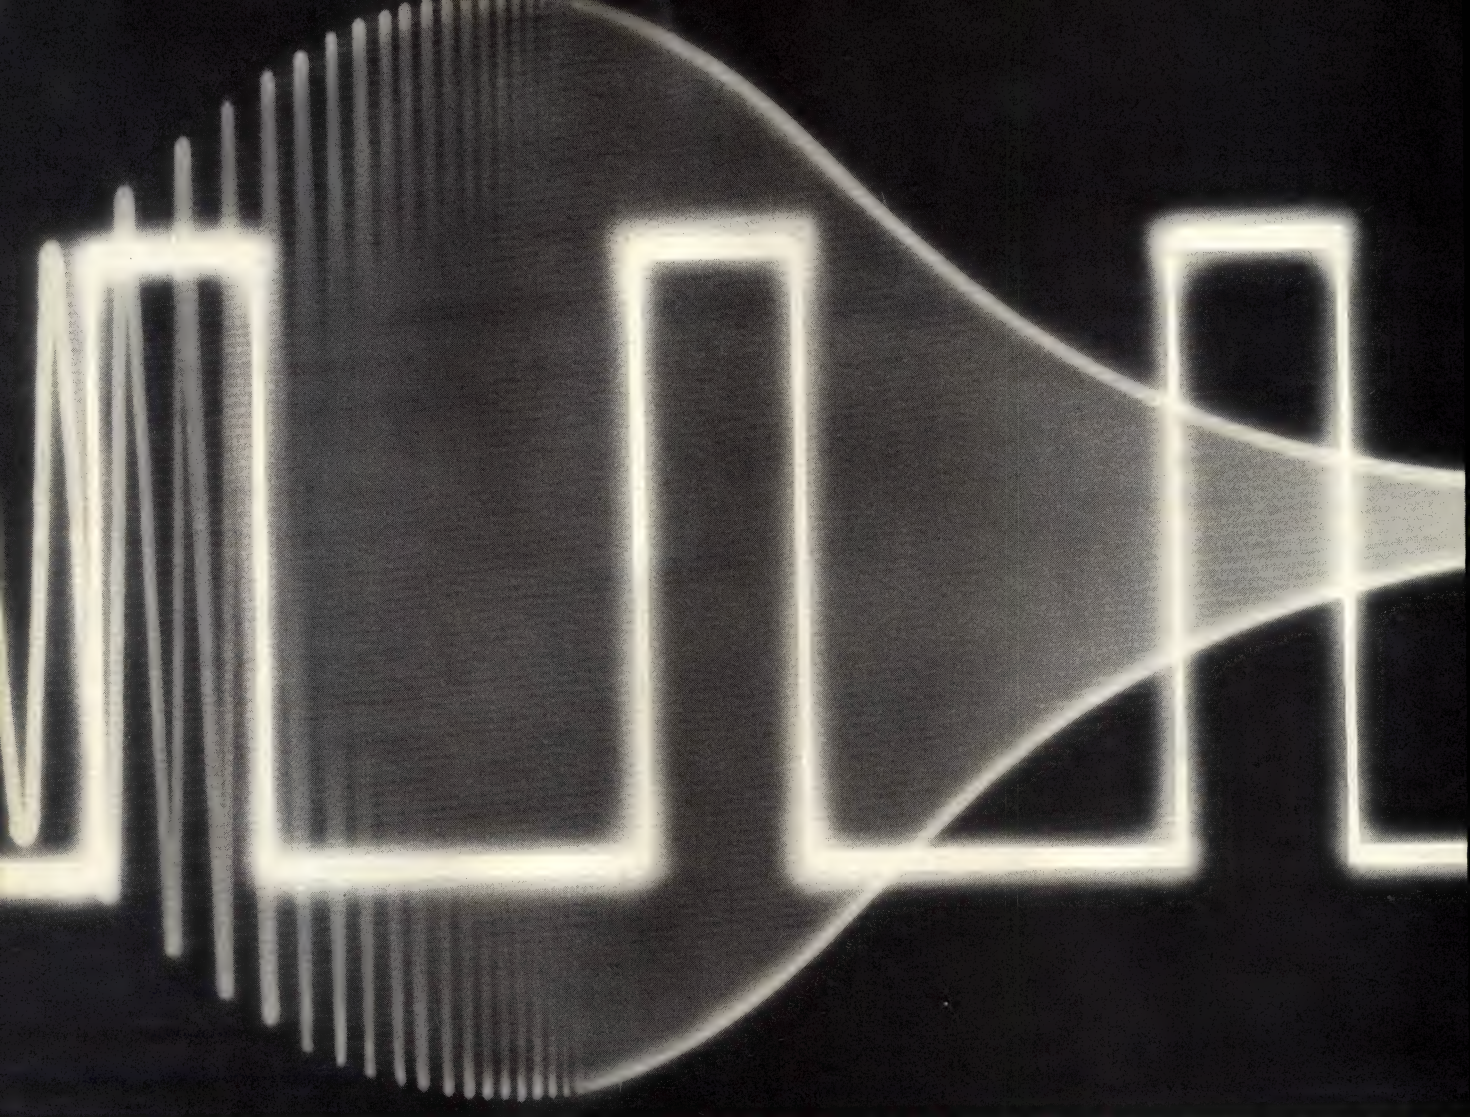

## We've had longer to perfect the Function/Pulse Generator. After all, we offered it first.

In 1975 we combined a true pulse generator capability and a function generator. In Interstate's Series 70.

Today, many of our competitors are showing us the sincerest form of flattery.

But don't settle for an imitation when you can have the original for about the same price.

Our Series 70 Function/Pulse Generators are true pulsers. The F-77, for example, produces a precise, stable 15 nanosecond rise time pulse with constant width adjustable down to 30 nanoseconds, unipolar or with full offset and amplitude flexibility, and triggered or gated.

And Series 70 offers something very few of our competitors have caught up with: a choice of constant width or constant duty cycle pulses.

And all Series 70 models produce sine, square, triangle and dc-level waveforms with 5 to 95% waveform variable symmetry control, and calibrated coarse/fine frequency tuning.

Sweep start and stop limits are easily set with direct reading sweep dial.

Frequency ranges are the most usable—from 0.00002 Hz to 20 MHz—from infrasonics through video and beyond.

Series 70 also gives you FM Capability—externally applied voltages provide frequency control over each 1000:1 frequency range for sweeping frequency-sensitive devices, test programming, and other voltage-to-frequency and frequency modulation applications.

Before you buy any Function/Pulse Generator, take a long hard look at the original Series 70 from Interstate Electronics.

We've had longer than anyone to perfect our electronics and prove our reliability.

For our catalog including the Series 70, and our other bench and programmable test equipment write: Bob Sorenson, 1001 East Ball Road, Anaheim, CA 92803. Or Call: (714) 635-7210.



**INTERSTATE  
ELECTRONICS  
CORPORATION**

SUBSIDIARY OF **ATO**

Information Processing and Display.  
Systems. Products. Services.

For more information, Circle No 16





**RUGGEDNESS at your fingertips.** Digitran switches are built to take lots of punishment and keep functioning beautifully. Even our commercial lines meet military standards for such parameters as shock, vibration, temperature range and dielectric strength. We simply design and make them better.


***DIGITRAN***

The Digitran Company, a division of Becton, Dickinson and Company

855 South Arroyo Parkway • Pasadena, California 91105 • Phone: (213) 449-3110 • TWX 910-588-3794 TFI FX 67-5485



# S/D

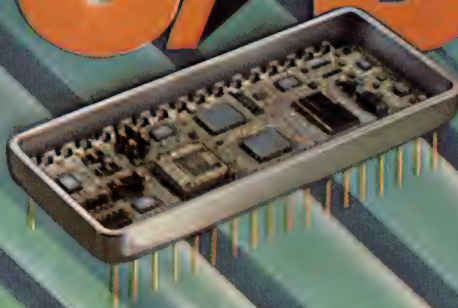

# MONOBRID<sup>TM</sup>

## The New Generation of Custom Monolithic Hybrid Converters from DDC.

By using customized monolithic chips, DDC has taken a giant step forward in converter technology. The new product—Monobrid—is much smaller, less complex, more reliable and requires less power than conventional hybrids.

The first of DDC's new Monobrid series is a *single* 36-pin DDIP module containing a complete 14-bit S/D or R/D converter. At half the size of conventional hybrids the new DDC-8915 Series Monobrid packs the same kind of high

performance. Accurate to  $\pm 2.6$  minutes, the new S/D Monobrid offers tri-state latched outputs in two bytes and continuous tracking, even during data transfer. It accepts broadband inputs of 360 to 1000 Hz, or 47 to 1000 Hz; and is made to order for applications where small size, high MTBF and low power are critical.

For more information about DDC's new 8915 Series Monobrid converter, call or write Department B-8, today.



**ILC DATA DEVICE CORPORATION**

Dept. B-8, 105 Wilbur Place, Bohemia, New York 11716  
516-567-5600, TWX: 510-228-7324

**LOS ANGELES:** ILC Data Device Corporation, Dept. B-8, 7337 Greenbush Avenue, No. Hollywood, CA 91605 (213) 982-6454. TWX 910-499-2674; **LONDON:** DDC United Kingdom Ltd., Dept. B-8, 128 High Street, Hungerford, Berkshire RG17 0DL, England (44) 4886-2141/2142, TLX 851-848826; **PARIS:** DDC Electronique, Dept. B-8, 4 Rue De Abreuvoir, 92400 Courbevoie, France (01) 333-5888, TLX 842-630609

Note: Monobrid<sup>TM</sup> is a trademark of ILC Data Device Corporation

**See us at Electro '80, Booths #2342 and #3220**

For more information, Circle No 162



# Mail us this ad

and we'll help you discover simple, effective solutions to difficult troubleshooting problems.

FAULT	STIMULUS	RESPONSE	TEST METHOD
Shorted Node	546A Pulser <sup>1</sup>	547A Current Tracer	<ul style="list-style-type: none"> <li>• Pulse shorted node</li> <li>• Follow current pulses to short</li> </ul>
Stuck Data Bus	546A Pulser <sup>1</sup>	547A Current Tracer	<ul style="list-style-type: none"> <li>• Pulse bus line(s)</li> <li>• Trace current to device holding the bus in a stuck condition</li> </ul>
Signal Line Short to Vcc or Ground	546A Pulser	545A Probe Current Tracer	<ul style="list-style-type: none"> <li>• Pulse and probe test point simultaneously (short to Vcc or Ground cannot be overridden by pulsing)</li> <li>• Pulse test point, and follow current pulses to the short</li> </ul>
Vcc to Ground Short	546A Pulser	547A Current Tracer	<ul style="list-style-type: none"> <li>• Remove power from test circuit</li> <li>• Disconnect electrolytic bypass capacitors</li> <li>• Pulse across Vcc and ground using accessory connectors provided</li> <li>• Trace current to fault</li> </ul>
Internally Open IC	546A Pulser <sup>1</sup>	545A Probe	<ul style="list-style-type: none"> <li>• Pulse device input(s)</li> <li>• Probe output for response</li> </ul>
Solder Bridge	546A Pulser <sup>1</sup>	547A Current Tracer	<ul style="list-style-type: none"> <li>• Pulse suspect line(s)</li> <li>• Trace current pulses to the fault</li> <li>• Light goes out when solder bridge passed</li> </ul>
Sequential Logic Fault in Counter or Shift Register	546A Pulser	548A Clip	<ul style="list-style-type: none"> <li>• Circuit clock de-activated</li> <li>• Use Pulser to enter desired number of pulses</li> <li>• Clip onto counter or shift register and verify devices truth table</li> </ul>

1. Use the Pulser to provide stimulus, or use normal circuit signals, whichever is most convenient.



HP's IC Troubleshooters make troubleshooting digital circuits fast and less frustrating. Take a look at the chart and see why more than 50,000 people use these simple, rugged, low-cost Hewlett-Packard instruments.

**LOGIC PULSER** stimulates IC's in-circuit for testing. Automatically drives the circuit to its opposite state. No unsoldering components or trace cutting. \$115-\$175\*

**LOGIC PROBE** shows pulse activity: high, low or bad level, single pulse or pulse trains. High input impedance. Overload protected. Automatic. More convenient than a scope. \$90-\$150\*

**LOGIC CLIP** with 16 LED's display state of up to 16 IC pins at once. High input impedance. Overload protected. Automatic. \$115-\$150\*

**CURRENT TRACER** inductively senses and displays logic current pulses. Finds shorts and stuck nodes with no unsoldering or trace cutting. Uses in-circuit current or pulses from Logic Pulser. \$350\*  
\*Domestic US prices only.

Order now, or call your nearby HP sales office for complete information, or write Hewlett Packard, 1507 Page Mill Road, Palo Alto, CA 94304

Yes! I want to discover easy solutions to difficult troubleshooting problems. Please rush me a free copy of HP's 20-page Troubleshooting Catalog and a copy of HP's new 38-page "New Techniques of Digital Troubleshooting."

NAME \_\_\_\_\_  
COMPANY \_\_\_\_\_  
ADDRESS \_\_\_\_\_  
CITY \_\_\_\_\_  
STATE \_\_\_\_\_ ZIP \_\_\_\_\_



**HEWLETT  
PACKARD**

02904A



# LAST NOVEMBER, DATA GENERAL AND DEC ANNOUNCED NEW COMPUTERS. THE SIMILARITY ENDS THERE.

COMPARE:	SPEED		PRICE
	Thousands Whetstone instructions/second		
	Single Precision	Double Precision	
DEC PDP 11/44 System	<b>314*</b>	<b>231*</b>	<b>\$41,900*</b>
			Includes PDP 11/44 with 256 ERCC memory, 20.8 MB dual RL02 disc subsystem, floating point processor and LA120 console printer
Data General ECLIPSE S/140 System	<b>450</b>	<b>380</b>	<b>\$37,450</b>
			System including S/140 with 256KB ERCC MOS memory, Model 6100 25MB non-removable moving head disc with integral 1.26 MB diskette floating point hardware and Dasher TP2 180 CPS console printer
<b>ECLIPSE S/140 is:</b>	<b>43% faster</b>	<b>65% faster</b>	<b>10% lower price</b>

What more can we say? Our new ECLIPSE® S/140 is not only a great deal faster than the 11/44, it's also a great deal, period. Read the chart. Then you'll understand why our ECLIPSE S/140 is your only choice. Break the speed limit without paying the price. Send in the coupon.

Data General Corporation, Westboro, MA 01580, (617) 366-8911. ECLIPSE is a registered trademark of Data General. ©Data General Corporation, 1980.

**VISIT US AT BOOTH #1339  
AT NCC, ANAHEIM, CA.,  
MAY 19-22, 1980.**

**Data General**

Mail to: Data General Corporation Westboro, MA 01580  
☐ I can read. Send me complete information immediately.  
☐ I can't read but I can't wait. Send a salesman now.

Name \_\_\_\_\_ Title \_\_\_\_\_ Company \_\_\_\_\_ Address \_\_\_\_\_ City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_ Tel. \_\_\_\_\_

**EDN 420**

**The Computer  
of the U.S. Olympic Sports  
Medicine Committee**


\*As reported in COMPUTER SYSTEMS NEWS, Dec. 3, 1979; MINI-MICRO SYSTEMS, Jan. 1980.

For more information, Circle No 164



# Hughes Semiconductor Products Delivers CMOS Microprocessors ...and More.

## The 1800 CMOS Family

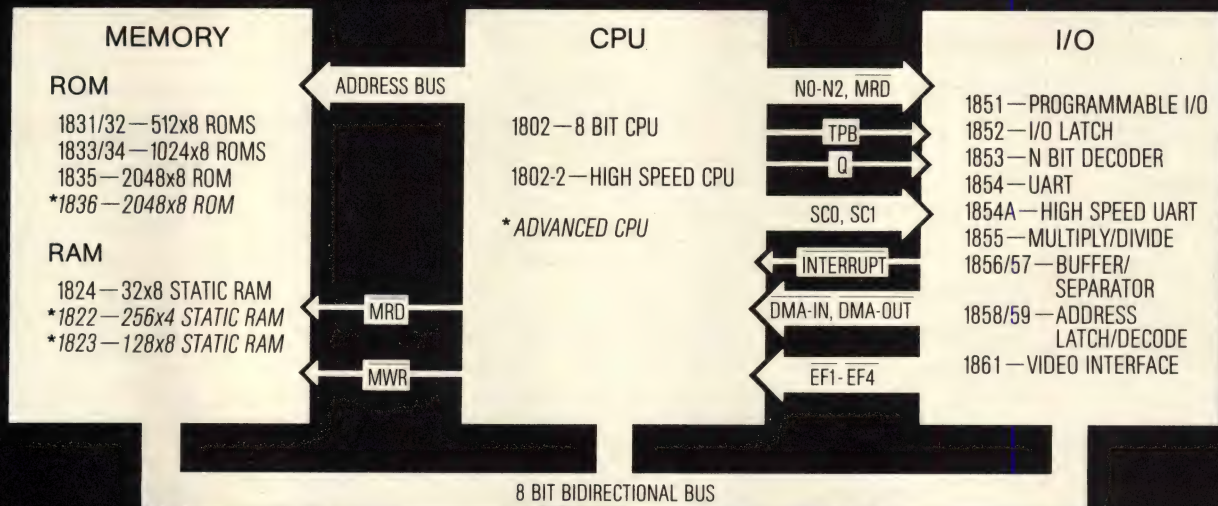

\* Italics denote future products.

Hughes delivers a complete 1800 CMOS Microprocessor Family in both commercial and military versions.

The commercial grade devices provide low power, wide operating temperature range and the expected high noise immunity of CMOS to such diverse applications as data processors, portable instrumentation, process controllers, and complex electronic games.

The military grade version, screened to standard military reliability requirements, offers the same CMOS advantages and the exacting performance demanded by such programs as space telecommunications, aircraft navigation controls, and geophysical data logging. These units, as well as the commercial units, are available in either a 4 to 6.5 volt or 4 to 12 volt operating range.

The 1800 CMOS Microprocessor Family offers an extensive complement of memory and I/O devices,


including such new parts as the 1851 Software Programmable Input/Output Port and the 1855 Eight-Bit Expandable Multiply/Divide units. In addition, several new support devices are being designed for introduction in 1980.

The support doesn't end at the device level; Hughes offers an inexpensive, easy-to-use Hughes Microprocessor Development System which includes a real time hardware emulator. High level software language is also available. In addition to the 1802 CMOS Microprocessor, the Hughes Development System supports other industry-standard microprocessors.

Write for our new 24-page, 1800 CMOS Product Guide; for further information, call (800) 854-3515 or (714) 759-2907. Solid State Products Division, 500 Superior Avenue, Newport Beach, CA 92663

### HUGHES

HUGHES AIRCRAFT COMPANY  
SOLID STATE PRODUCTS DIVISION

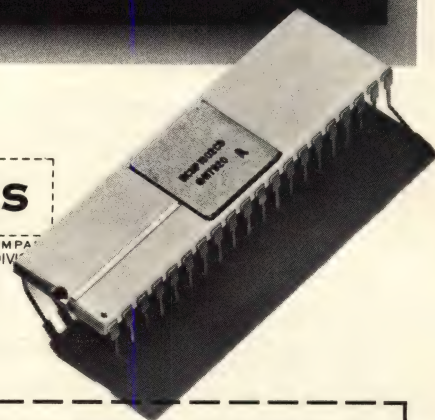

Hughes Aircraft Company Solid State Products Division  
500 Superior Avenue Newport Beach, CA 92663

I would like more information on the Hughes 1800 CMOS Family.

Name

Company  Title

Address

City  State  Zip

Telephone  Ext.

Application

EDN 4/80



## Sales Offices

### H Victor Drumm

Executive Vice President  
and Publisher  
Boston, MA 02116  
(617) 536-7780

### NEW YORK CITY 10017

George Isbell, Regional Manager  
Bill Segallis, Regional Manager  
205 E 42nd St (212) 949-4423

### BOSTON 01880

Richard Parker, Regional Manager  
Hal Short, Regional Manager  
1 Lakeside Office Park  
Wakefield, MA 01880  
(617) 246-2293

### PHILADELPHIA 19087

Steve Farkas, Regional Manager  
George Isbell, Regional Manager  
999 Old Eagle School Rd  
Wayne, PA 19087  
(215) 293-1212

### CHICAGO 60521

Clayton Ryder, Regional Manager  
Charles Durham, Jr  
Regional Manager  
15 Spinning Wheel Rd  
Hinsdale, IL 60521  
(312) 654-2390

### CLEVELAND 44115

Charles Durham, Jr  
Regional Manager  
1621 Euclid Ave  
(216) 696-1800

### DENVER 80206

John Huff, Regional Manager  
270 St Paul St (303) 388-4511

### SAN FRANCISCO 95008

Hugh R Roome, Vice President,  
Northwest Regional Manager  
Sherman Bldg  
3031 Tisch Way, Suite 1000  
San Jose, CA 95128  
(408) 243-8838

### LOS ANGELES 90036

Ed Schrader, Regional Manager  
Charles J Stillman, Jr  
Regional Manager  
5670 Wilshire Blvd  
(213) 933-9525

### TOKYO 106 JAPAN

Tomoyuki Inatsuki  
TRADE MEDIA JAPAN INC  
R212, Azabu Heights  
1-5-10 Roppongi, Minato-ku  
Tel: (03) 585-0581  
Telex: J28208 MEDIAHS

### CAREER OPPORTUNITIES Eastern US

Lynn George, Victoria Fraser  
1200 Summer St  
Stamford, CT 06905  
(203) 327-6772, (203) 327-6746

### Western US

Diane Smith  
5670 Wilshire Blvd  
Los Angeles, CA 90036  
(213) 933-9525

## New Products


### COMPUTER-SYSTEM SUBASSEMBLIES



**SAMPLE/HOLD.** For use with ultrafast A/D converters with up to 10-bit resolution, SHM-UH3 features 30-nsec acquisition time and 30-psec aperture uncertainty time. It samples a 20-MHz, 10V p-p sinusoid to 8-bit accuracy ( $\frac{1}{2}$ -LSB uncertainty); it can also sample at up to 10 MHz while making full-scale acquisitions. Sample-mode bandwidth is 45 MHz, and output slew rate equals 500V/ $\mu$ sec.

Analog characteristics include  $\pm 5V$  input-signal range, constant near-unity gain (0.95 to 0.98) and 0.05% max linearity error. Hold-mode droop specs at 50  $\mu V/\mu$ sec, and Hold-mode feedthrough equals -66 dB from dc to 10 MHz.

The unit provides a 100-k $\Omega$  input impedance, 50- $\mu V/^\circ C$  output offset drift and  $\pm 30$ -mA output current and comes in a 2 $\times$ 2 $\times$ 0.375-in. case. Power-supply requirement is  $\pm 15V$  dc at 50 mA and 5V dc at 100 mA; operating-temperature range is 0 to 70 $^\circ C$ . \$230. **Datel-Intersil**, 11 Cabot Blvd, Mansfield, MA 02048. Phone (617) 339-9341. **Circle No 311**

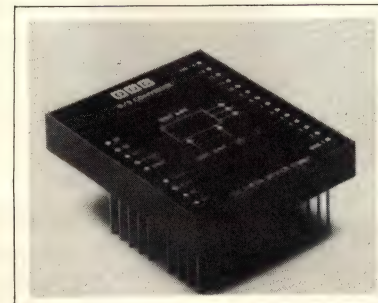

**D/S CONVERTER.** A 14-bit 400-Hz unit, DSC-644 is a pin-for-pin replacement for the industry-standard 400-Hz EDSC-H and -L. The 3.125 $\times$ 2.625 $\times$ 0.52-in., 5.5-oz module meets or exceeds MIL-STD-202E and features a typical output-scale-factor variation of 0.05% and a current-limiting output stage that is short-circuit proof. Accurate to  $\pm 4$ %, the

unit accepts a digital input angle (TTL and CMOS compatible) and a reference excitation for conversion to a synchro or resolver output. Two standard operating-temperature ranges are available: 0 to 70 $^\circ C$  and -55 to +85 $^\circ C$ . From \$440. **ILC Data Device Corp**, 105 Wilbur Pl, Bohemia, NY 11716. Phone (516) 567-5600. **Circle No 312**

**BUBBLE-MEMORY SYSTEM.** The TM990/211 module uses the TIB1000 1-million-bit bubble-memory device and has an on-board controller (TIB0903), which provides complete interface to the TM990 bus and transfers data via the CRU mode. The unit can perform single- or multipage transfers at a maximum data-transfer rate of 85k bps and can be purchased with 1M-, 2M-, 4M- or 6M-bit devices to provide 128k, 256k, 512k or 768k bytes of nonvolatile storage, respectively. Average access time equals 11.2 msec. \$3200 (128k bytes) to \$15,200 (768k bytes). Delivery, 8 to 10 wks ARO. **Texas Instruments Inc**, MS 308, Dallas, TX 75265. Phone (214) 238-2011. **Circle No 313**




**MODEM ELIMINATORS.** 700 Series full-duplex TTL- and DTL-compatible devices allow user communications without modifications to existing data formats, protocols, speeds or software. They operate from one 5V dc power supply and require <2.25 in.<sup>2</sup> of pc-board space; because they are TTL compatible, any data that can be converted into a serial bit stream can be transmitted. The low-speed version handles data at 1M baud at 1000 ft with  $\leq \pm 5\%$  distortion and at 20k baud at 11,000 ft. The medium-speed version operates at 5M baud at 1000 ft and 250k baud at 11,000 ft with  $\pm 5\%$  distortion. \$24 for low-speed version; \$35 for medium-speed unit (100). **Oppco**, 7200 E Dry Creek Rd, Suite F 201, Englewood, CO 80112. Phone (303) 771-7580. **Circle No 314**



# FAST LATCHED MIL D/A's

Each of these fast settling Micro Networks' converters contains a TTL input latch, for easy interfacing and rapid throughput in high speed data distribution systems. There's no bottleneck. They set up in 40 nSec and have no data overlap (hold time) requirements.




**MN3020H/B**

**Latched 8 Bit D/A**  
**Monotonic -55 to +125°C**  
**Settling Time 3  $\mu$ Sec max**  
**MIL-STD-883 Processing**

All are excellent performers. We guarantee absolute accuracies and  $\pm 1/2$  LSB linearity and monotonicity over the full military temperature range (-55 to +125°C). As a matter of fact, the MN3860H/B ( $\pm 0.3\%$  absolute accuracy guaranteed over temperature) is


still the most accurate 12 Bit D/A available in a DIP.



**MN3860H/B**

**Latched 12 Bit D/A**  
**Monotonic -55 to +125°C**  
**Settling Time 7  $\mu$ Sec max**  
**MIL-STD-883 Processing**

They are multi-range converters, complete with internal reference and output amplifier. This means greater versatility and significant, built-in economies. You'll save board space, design time, purchasing time and money.



**MN3040H/B**

**Latched 10 Bit D/A**  
**Monotonic -55 to +125°C**  
**Settling Time 5  $\mu$ Sec max**  
**MIL-STD-883 Processing**

Send for a complete data sheet on each. For immediate action, call John Munn or Chuck Sabolis (617-852-5400). And if you have not yet received your copy of our new 250-page catalog of data conversion products, drop us a line on your company letterhead.



Micro Networks Company,  
324 Clark Street,  
Worcester, Massachusetts 01606


**MICRO NETWORKS**  
**Advancing Data Conversion**  
**Technology**

 **Micro Networks**  
A DIVISION OF UNITRODE CORPORATION

For more information, Circle No 166



## New Products

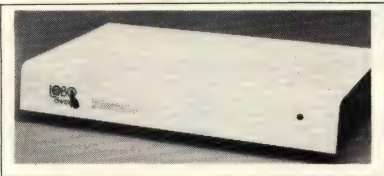

**DISC INTERFACE.** For TRS-80 computers, Model LX80 expands memory storage capacity up to 40M bytes, provides facilities for up to 32k of RAM

and offers a second serial port. A switch permits overriding the keyboard ROM for booting-in diagnostics and customized operating systems. Connectors for 5.25- and 8-in. floppy-disc drives and other peripheral devices are provided on the side and rear panels. Other features include parallel Centronics printer port, screen printer port, two  $\mu$ P-controlled bidirectional serial ports and a crystal-controlled real-time clock. \$525. Deliv-

ery, 45 days ARO. **Lobo Drives International**, 935 Camino Del Sur, Goleta, CA 93017. Phone (714) 641-1436. **Circle No 315**

**PRINTER INTERFACE.** Interfacing with NEC, Diablo and Qume letter-quality printers as well as high-speed Centronics/Dataproducts printers for draft and non-letter-quality applications, I/O Master S-100 interface board features two serial and two parallel ports plus an 8-level interrupt control and dual interval-timer circuitry. The two 8251-based serial ports have built-in 32-character FIFO buffers. \$400. **MicroPro International Corp**, 1299 Fourth St, San Rafael, CA 94901. Phone (415) 457-8990.

**Circle No 316**

## Allied Control Relays: Go for superior switching life.




### In a big way.

Our original Cradle® Series Relays broke new ground in packing accepted levels of performance into far less real estate, without sacrificing reliability.\* Mounting means include solder, PCB and socket options. Sensitivity from 20 to 140 mW per pole. Contact selection (1 Form A to 8 Form C) to meet load requirements.

### In a small way.

Our new low profile MPC, DIP, SIP\* family delivers pace-setting high density packaging, including the smallest latching relay available.

Sealed versions withstand fluxing, wave soldering, in-line cleaning. (1 Form A to 4 Form C.) See catalog data in EEM or call Gould Inc., Distribution and Controls Division, 100 Relay Road, Plantsville, CT 06479, 203-621-6771.




Actual size.

**The Real Estate Experts in Relays**

\*Write for test data:  
Cradle: TR 104 Low profile: TR 202

**GOULD**  
An Electrical/Electronics Company

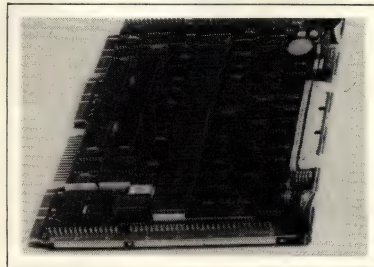

**STORAGE-MODULE-DRIVE** controller Model S03/B is a  $\mu$ P-based device for DEC LSI-11  $\mu$ Cs. It emulates DEC's RK611 controller, which interfaces to the RK07 storage-module drive and operates under RT-11 and RSX-11M. The unit also operates with Control Data Corp's 80MB 9762 and 300MB 9766 storage-module drives or equivalent drives from Ampex, Ball and Century Data Systems; up to four 80M-byte drives can be daisy-chained. The controller installs in any two standard quad slots in the host LSI-11. Power requirements are 5V dc at 9A and -15V dc at 0.7A. \$5400. **Dataram Corp**, Princeton-Hightstown Rd, Cranbury, NJ 08512. Phone (609) 799-0071.

**Circle No 317**

**EPROM PROGRAMMER.** Multibus compatible, Model ZX-908 uses a 5V power supply. It is available in versions to program Intel 2716, 2732 and 2732A EPROMs and can program 16k bytes in one operation. Eight zero-insertion-force sockets are provided for PROM insertion and withdrawal. \$450. **Zendex Corp**, 6398 Dougherty Rd, Dublin, CA 94566. Phone (415) 829-1284. **Circle No 318**



**SIEMENS**

# Siemens Goes Ceramic.

Monolithic Ceramic Capacitors complete the quality Siemens line.

The Siemens tradition of uncompromising quality and performance standards in components continues. Epoxy coated, radial leaded capacitors are now available in five case sizes, three temperature coefficients (COG, X7R, Z5U), with capacities ranging from 4.7 pF to 4.7  $\mu$ F. They're for rapid delivery.

We can now offer a full line of ceramic, solid tantalum, miniature aluminum electrolytic, film, metallized polyester film, and stacked metallized film capacitors. One respected name, one quality source.

Siemens is the fifth largest electronics company in the world, producing some \$700 million worth of components annually in more than 50,000 different configurations.

Contact your nearest Siemens representative or authorized distributor.

## Siemens Corporation

Components Division

186 Wood Ave. South, Iselin, N.J. 08830

(201) 494-1000

In Canada: Siemens Electric Ltd., P.O. Box 7300, Point Claire, Quebec.



**Specify  
Siemens  
and be  
secure.**



# Ney wrote the book on low energy contacts

## components in the millions


**now on-line**—Low energy contacts and components are our special area of electronic technology. We design to your specifications . . . produce in quantity and deliver highly reliable components. The Ney capability includes precious metallurgy, precision plastic molding and assembly. Yes, we wrote the book, but more importantly our components are now on-line in thousands of critical applications. Give us your problem.

Write The J. M. Ney Company, Bloomfield, CT 06002 or call (203) 242-2281



For more information, Circle No 169

## New Products

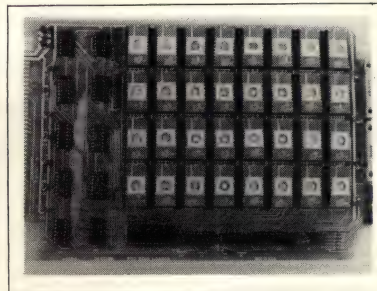

**ROM LOADER.** Permitting rapid reloading of remote Texas Instruments 990 processors, RL 990-1, by activating Load on the front panel, transfers a program from the EPROM into RAM. Features include 64k bytes of program storage using the TMS 2516 (128k bytes using TMS 2532), approximately 400k-bytes/sec data-transfer rate, four independent user-programmable indicators and software-readable hexadecimal switch. The unit uses loader PROMs and requires 5V at 400 mA (max) plus 100 mA (max) for each TMS 2516 and 160 mA (max) for each TMS 2532. \$350. **National Data Corp.**, One National Data Plaza, Corporate Square, Atlanta, GA 30329. Phone (404) 329-8513.

Circle No 319


**PRIORITY-INTERRUPT** controller SB8301 adds vectored-interrupt capabilities to STD Bus systems. The unit relieves the CPU from having to poll all devices to determine where the appropriate service routine is located, accepts 16 discrete interrupt inputs, resolves priority and generates Call instructions during the interrupt-acknowledge sequence. You can use an expansion connector to implement 64 prioritized interrupts by cascading cards. \$285. **Micro/Sys Inc.**, 1353 Foothill Blvd, La Canada, CA 91011. Phone (213) 790-7957.

Circle No 320


**64k MEMORY BOARD.** The Model 460 dynamic RAM is organized into four blocks, each of which is individually deselectable under program control for memory mapping. The unit supports 8080 or Z80 CPUs, serves S-100-bus applications and operates at 4 MHz with no wait states. A parity feature provides increased data security: In the event of an error, a parity bit is set that lights an LED on the board and can be used to set a vectored interrupt or halt the CPU. <\$1000. **Industrial Micro Systems Inc.**, 628 Eckhoff St, Orange, CA 92668. Phone (714) 978-6966. **Circle No 321**



# ANNOUNCING THE FIRST OPTO SENSOR WITH BRAIN WAVES.

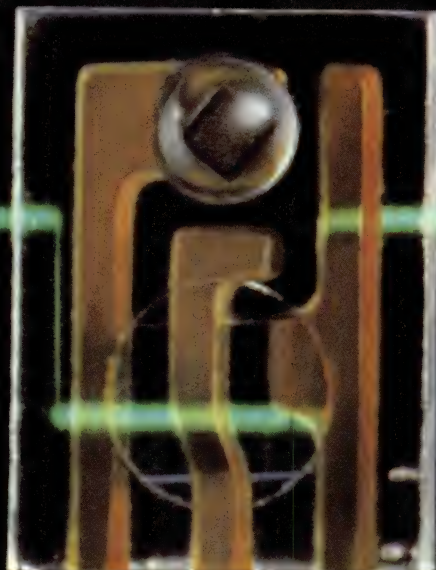


It's a logical breakthrough from Spectronics. We've designed the first opto detector IC offering compatability with TTL, CMOS and other standard logic families.

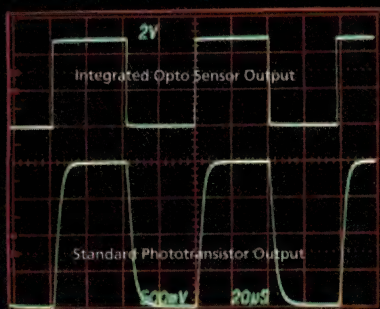

The SDP 8600 integrates a Schmitt trigger, voltage regulator, differential amplifier and photodiode onto the same substrate — replacing a complete PC board. This neat integration hasn't cost any performance. It has a propagation delay time of only 5  $\mu$ s and a 50 ns rise and fall time.

Designed for use with an infrared LED, it's ideal for sensing applications such as computer peripherals, toys and automatic cruise control systems. With significant benefits like improved

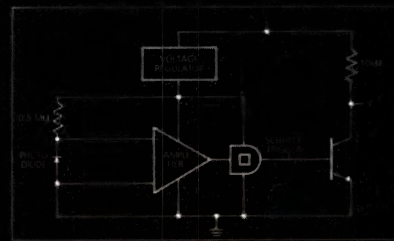

noise immunity, higher reliability and better performance.

The 8600 is just one example of a long line of optoelectronic firsts from Spectronics.

So, if you're looking for better design solutions, call Spectronics. We do smart things with light.

For more information, contact a Spectronics distributor. Or call us at 214/234-4271. Address: Spectronics, 830 East Arapaho Road, Richardson, Texas 75081.


***Spectronics***  
**Adivision of Honeywell**

For more information, Circle No 170

Light years ahead.




## New Products

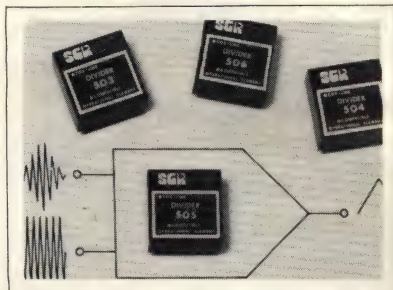

**2-QUADRANT DIVIDERS.** For interfacing with  $\mu$ P-based systems, Models 503 through 506 0.5-in.<sup>3</sup> microhybrid modules include a transconductance dividing element, a stable reference and an output amplifier with specified accuracy, internally trimmed for feedthrough, output zero and gain. Transfer function is 10X/Y, and dividing accuracy (at 25°C) ranges from 1.0 to 0.1%, including the effects of offset voltage, feedthrough,

scale factors and nonlinearity. Features include 0 to 70°C operation,  $\pm 10$ V/5-mA output, 1-MHz small-signal bandwidth, 750-kHz full-power bandwidth and slew rate of 45V/ $\mu$ sec. \$65 to \$160. **SGR Corp.**, Box 391, Canton, MA 02021. Phone (617) 828-7773. **Circle No 322**

## You've Seen The Rest - Now See The Best!

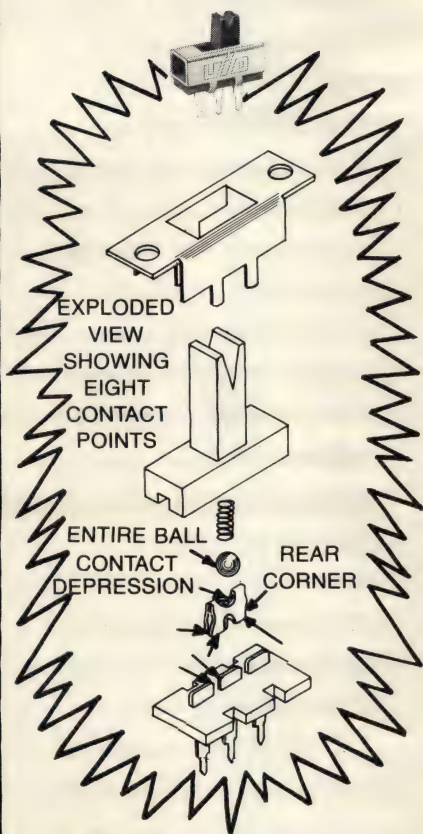

### UID's MA-012 SLIDE SWITCH

- △ Compact - Dual Wipe Construction
- △ Unique High Reliability In A Commercial Slide Switch

For all of its features, this switch is still available at the low cost of . . .

Only **20¢** each per 10,000 Quantity

. . . and orders are being accepted at current pricing.

Call Walt Dinneen,  
Switch Product Manager  
For FREE SAMPLE


**AMF**

### Electro-Components Division RCL and UID Products

General Sales Offices: 2713 Gateway Drive, Pompano Beach, Florida 33060  
305/973-8620



**14-BIT ADC.** Providing four selectable input ranges of  $\pm 10$ ,  $\pm 5$ , 0 to +5 and 0 to +10V, ADC-14-QM offers conversion time of 50  $\mu$ sec and differential linearity of  $\pm 1/2$  LSB max over the temperature range of 0 to 70°C. The stable unit furnishes differential nonlinearity and offset TCs of  $< \pm 5$  ppm/°C and measures  $2 \times 4 \times 0.4$  in. Power dissipation specs at 2.5W. \$186 (25). **Intech**, 282 Brokaw Rd, Santa Clara, CA 95050. Phone (408) 244-0500. **Circle No 323**

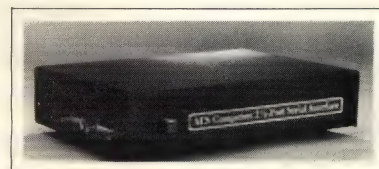

**SERIAL INTERFACES.** These self-contained 2 1/2- and 4 1/2-port software-programmable units provide two or four independent, full-duplex serial-communication controllers, respectively. The GPIB to the host computer can be adapted to most  $\mu$ Cs with plug-in modules and adapter cables. The units operate with 8080, Z80, 6800 and 6502  $\mu$ Ps in memory-mapped or I/O-mapped environments; using 8251A serial controllers, they support synchronous communication to 64k baud and asynchronous communication to 19.2k baud. The 2 1/2-port unit furnishes two RS-232C and one isolated current-loop interface; the 4 1/2-port device, four RS-232C and two current-loop interfaces. 2 1/2 port, \$395; 4 1/2 port, \$695. **AES Computers**, 118 S Loara, Anaheim, CA 92802. Phone (714) 635-5981. **Circle No 324**



# Learn to live without Tantalum for \$19.95


If you think you're stuck with tantalum capacitors because you need their high-performance, low-leakage characteristics, but are getting upset because of their soaring prices and increasing scarcity — do this:

Send for our Designer's Kit of Capar CLE Series Low Leakage Radial Miniature Aluminum Electrolytic Capacitors.

Our CLE Series performs like tantalum. But at half the price or better. And you can get all you want. Whenever you want. From a few hundred to a few million.



And with our Designer's Kit you'll be able to get acquainted with them. See where they can *directly* replace the tantalum and where they can't. Do some breadboarding to find out how you can use them instead of tantalum or for any other low-leakage, close tolerance applications.



Actual size

The kit has 60 units, four each of the most popular values. It covers the range of 0.1 through 100 mfd with working voltages from 6.3wv through 50wv. Leakage current 0.006cv or 0.5 $\mu$ A, whichever is greater (after 1 minute charge at DC rated voltage) and 20% or better tolerance.

And if space is any kind of a problem please note that these capacitors feature the smallest can sizes in the industry: 0.160" (4mm) diameter by 0.300" (7.5mm height).

**For \$19.95, what can you lose?** Call or write CAPAR COMPONENTS CORP., 110 Marcus Drive, Melville, NY 11747. (516) 454-6390; (800) 645-9626; Telex 143108 2520 Yale Street, Santa Ana, CA 92704 (714) 957-8644; (800) 854-3711

**CAPACITORS:** ALUMINUM ELECTROLYTICS, SOLID TANTALUM, METALLIZED FILM, POLYESTER FILM, CERAMIC DISC, LOW LEAKAGE, EXTENDED TEMP. RANGE, etc. ...  
**RESISTORS:** CARBON FILM, METAL FILM, METAL OXIDE, NETWORKS.



For a copy of our NEW 1980 CATALOG with our FULL LINE OF CAPACITORS AND RESISTORS, call, write or circle the number below.

For more information, Circle No 172



# New Products

## COMPUTERS & PERIPHERALS




**GRAPHICS SYSTEM.** The PGM computer weighs about 85 lbs (complete with 300k bytes of RAM and a 29M-byte disc), resides in a 19×18×25-in. cabinet and functions either as a stand-alone graphics-oriented computer or as an intelligent distributed processor. As a graphics station, it produces output on several devices simultaneously and uses an inexpensive console terminal to avoid interfering with the graphics function.

The system uses no programmer-addressable registers, no assembly language, no I/O instructions to operate channels or any other machine features unnecessary to a high-level language. Every instruction carries out extensive checking for invalid data or addressing conditions; all I/O is handled by a front-end Intel 8080  $\mu$ P via asynchronous RS-232 protocol with external peripherals.

Software includes extended DISPLA with publication-quality graphics capability including more than 60 type fonts, projection in 3D with hidden-line removal, curve fitting with various interpolations, a text editor and an interactive graphics system for creating graphics on-line.

The system includes five RS-232 ports, a front-end processor and a 48-bit processor. \$49,000. **Superset Inc.**, 11675 Sorrento Valley Rd, Suite L, San Diego, CA 92121. Phone (714) 452-8665. **Circle No 265**

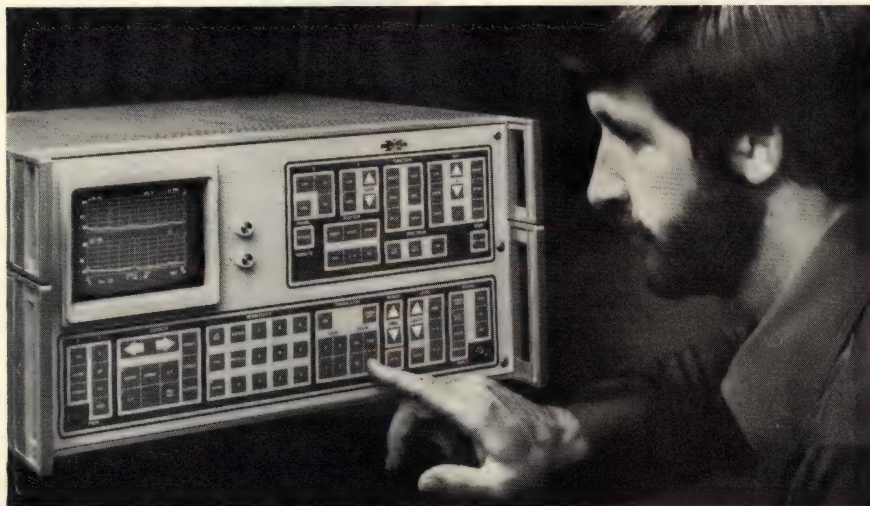


## Spectrum analysis at a mere touch

The SD345 FFT Signal Analyzer looks different and *is* different, and although the differences start right up front with a revolutionary new fingertip control panel, the features built into it are more than just cosmetic. They provide capabilities no other analyzer on the market can match. Here are some of the highlights:


- 400-line spectrum analysis to 100 kHz
- 70 dB dynamic range shown on a crisp (raster scan) video
- Time-signal averaging *plus* synchronous spectrum averaging for maximum signal-to-noise enhancement
- $\frac{1}{3}$ -octave and octave analysis from continuous or transient signals (*optional*)
- Selectable A or B acoustic weighting
- Digital input-output for complete computer control via IEEE 488/RS 232 interfaces (*optional*)
- Digital translator for expansion of specific spectrum areas by as much as 100X (*optional*)

Fingertip convenience . . . digital accuracy . . . clear, easy-to-read instant results—that's the new SD345. Send for the complete story so you can analyze the real difference in a really different spectrum analyzer.



No knobs or switches. Just fingertip pressure actuates the function shown, and a LED plus a light tone tells you contact has been made.

No guesswork! Complete X and Y grids, alpha-numeric annotation and data scaling gives immediate, accurate spectral information.



Call Leon Corcoran at (714) 268-7197 to schedule your demo.

**Scientific-Atlanta**  
**Spectral Dynamics**

P.O. Box 671 • San Diego, CA 92112 • (714) 268-7100

For more information, Circle No 173

**8080 SIMULATORS.** The Apple-II simulator package is an 8080 simulator/debugger program that runs directly on any 16k or larger Apple II computer. The KIM 1 version offers the same package; it runs on any KIM 1 computer and requires 1k bytes of RAM or ROM. Both packages allow the study of 8080 architecture on the same hardware used for 6502 studies and permit Apple II or KIM 1 users to use 8080 software. The Apple II version includes a BASIC program serving as an explanation manual and the machine-language program; the KIM 1 version is a KIM-format cassette tape containing the object code of the program. \$19.95. **Sybox**, 2344 Sixth St, Berkeley, CA 94710. Phone (415) 848-8233. **Circle No 266**

**$\mu$ C OPERATING SYSTEM.** An updated version of the REX-80 real-time executive enhanced to support either 8080/8085 or Z80  $\mu$ Cs, REX-80 V03 is fully event driven, allowing asynchronous operation of up to 255 independent tasks, each with 16 local-event flags. Because of its orthogonal data structure and virtual-processor approach, the system provides improved responsiveness compared with its predecessor. The enhanced Z80 version takes advantage of the Z80 instruction set and its Mode-2 interrupt structure. \$1500 in linkable object code on development-system-compatible media. **Systems & Software Inc.**, Suite 101, 2801 Finley Rd, Downers Grove, IL 60515. Phone (312) 932-9320. **Circle No 267**



# Made over here . . . for performance over there


Meet a new foreign power: metric motors from Bodine. The first American motors made to perform overseas.

For 75 years, Bodine has been the leader in fractional horsepower motors. And our experience shows in our new full range of 62 metric motors and gearmotors designed for 220/240 V, 50 Hz power input. Each is engineered to meet most international standards for safety and performance. And each delivers Bodine's reliable, dependable operation.

You'll also appreciate our foreign service. Our established international Distributor network ensures you a ready supply of Bodine products whenever and wherever you need them.

Bodine will keep your products working as well over there as they do over here.

Send for more information. At home or abroad, you can depend on Bodine.

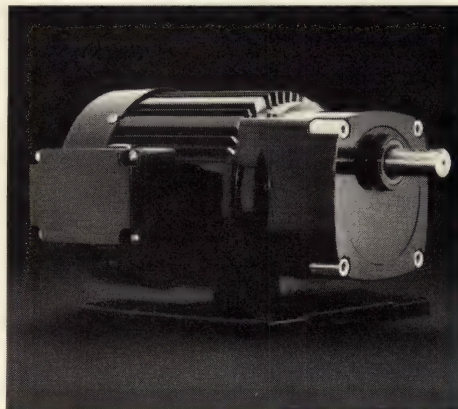

## Metric Motors/Gearmotors

**BODINE**  
**ELECTRIC**  
**COMPANY**

Small Motors, Gearmotors, Electronic Motion Controls  
For Seventy-five years, "the power behind the leading products."<sup>®</sup>

2500 West Bradley Place  
Chicago, 60618 USA  
Telephone 312-478-3515 Telex 25-3646

For more information, Circle No 174



# Our 0.3% ceramic resonators cost a lot less than 0.005% quartz



Why pay a premium for standard quartz frequency tolerance of 0.005% when a Murata-Georgia ceramic resonator at 0.3% is about 1/2 the price and, in 75% of all applications, can do the job just as well. What's more, in most configurations, a ceramic resonator is a lot smaller than a quartz crystal, KHz-for-KHz.

Look into our ceramic resonators. We cover the spectrum from 190 KHz to 600 KHz and 3 MHz to 30 MHz, and are finding wide application in telecommunications devices, tone generators, clock generators, oscillators, signal sources and many more.

Send for our complete technical information, and we'll show you how to save a bundle in frequency control. Murata Corporation of America, 1148 Franklin Road, S.E., Marietta, GA 30067; 404-952-9777.

**muRata-Georgia**

ceramic capacitors, subminiature potentiometers, piezoelectric ceramic filters, resonators and transducers, resistor networks, Posistor® PTC thermistors  
For more information, Circle No 44




**OSHINO**

**OL** The Mark  
You Can Trust

## New PBB LAMP

Bayonet Base Subminiature Lamp  
Directly Replaceable on P.C. Board

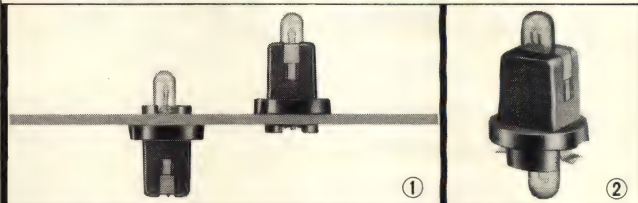

No soldering or socket required.  
Just insert and turn 90 deg. to mount.

1. Mountable to either side of P.C. Board. (Photo ①)
2. Bulb can be provided on either, or both ends on request. (Photo ②)

• For detailed literature and sample, call or write:

### WAMCO Technical Sales, Inc.

705 W. 16th Street, Costa Mesa, California 92627 TEL: (714) 833-9361  
TELEX: 678459

### OSHINO ELECTRIC LAMP WORKS, LTD.

Shinagawa, Tokyo, Japan.

For more information, Circle No 45

## 16-BIT RESIDENT SYSTEM SOFTWARE

### I8086

- RA8086      MACRO ASSEMBLER
- EDIT8086    TEXT EDITOR
- RTOS8086    REAL-TIME OPERATING SYSTEM

### Z8000

- RA8000      MACRO ASSEMBLER
- LINK8000    LINKING LOADER
- EDIT8000    TEXT EDITOR
- HA-CP/8000   INTERRUPT-DRIVEN DOS
- FLOAT8000   32-BIT FLOATING POINT PACKAGE

### OEM INQUIRIES INVITED

HEMENWAY ASSOCIATES INC.


101 Tremont Street  
Boston, MA 02108  
617-426-1931

For more information, Circle No 46

EDN APRIL 20, 1980



# New Products

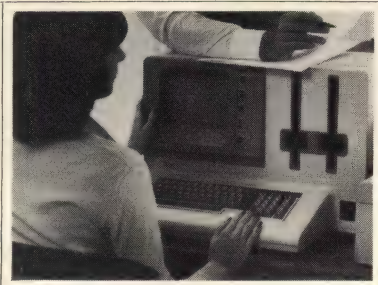


**COMPUTING SYSTEM.** A small computer available in 12 versions, Model 5120 offers two choices of printers and an optional diskette storage unit that retains up to 2.4 million characters of additional information. It features a 9-in.-diagonal viewing screen, two built-in diskette files (up to 2.4-million-character capacity), a typewriter-like keyboard and main-storage options ranging from 16,384 to 65,536 characters of information. Six business application packages are available. \$13,500 for a representative configuration using BASIC, a 13,768-character main-storage capacity and 120-cps printer. **IBM General Systems Div.**, Box C-1645, Atlanta, GA 30301. Phone (404) 238-3643. **Circle No 268**



**DISPLAY TERMINALS.** Concept 520 Series units emulate DEC's VT-52 alphanumeric CRTs, providing standard features such as cursor control, home cursor, direct cursor addressing, reverse line feed, clear functions and alternate keypad mode. Other standard features furnished include windowing, programmable function keys, functional support for word processing and data-entry/retrieval applications, business graphics, multiple character sets and multiple I/O ports (including a printer port). \$1330 (75) for standard ASCII version with one full page of display memory. **Human Designed Systems Inc.**, 3700 Market St, Philadelphia, PA 19104. Phone (215) 382-5000.

**Circle No 269**

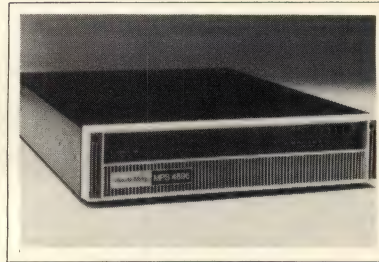


**DUAL-SPEED MODEM.** Installed at remote sites, MPS 4896 Fastran transmits data at 4800 bps and receives data at 9600 bps, operating on less expensive unconditioned multidrop lines. Using a  $\mu$ P digital equalizer, it provides 30-msec RTS/CTS response time and half-duplex operation over 4-wire dedicated unconditioned channels; it can also accommodate dial backup. Built-in diagnostic functions automatically switch the modem receiver to the operating speed of the transmitter for self test and analog and digital loopback to enable fault-isolation testing. \$7200, or \$165 per month on a 36-month lease. **Racal-Milgo Inc.**, 8600 NW 41st St, Miami, FL 33166. Phone (305) 592-8600.

**Circle No 270**



## VECTOR-PAK ENCLOSURES

COLORFUL BEAUTY OUTSIDE — VERSATILE & ACCESSIBLE INSIDE

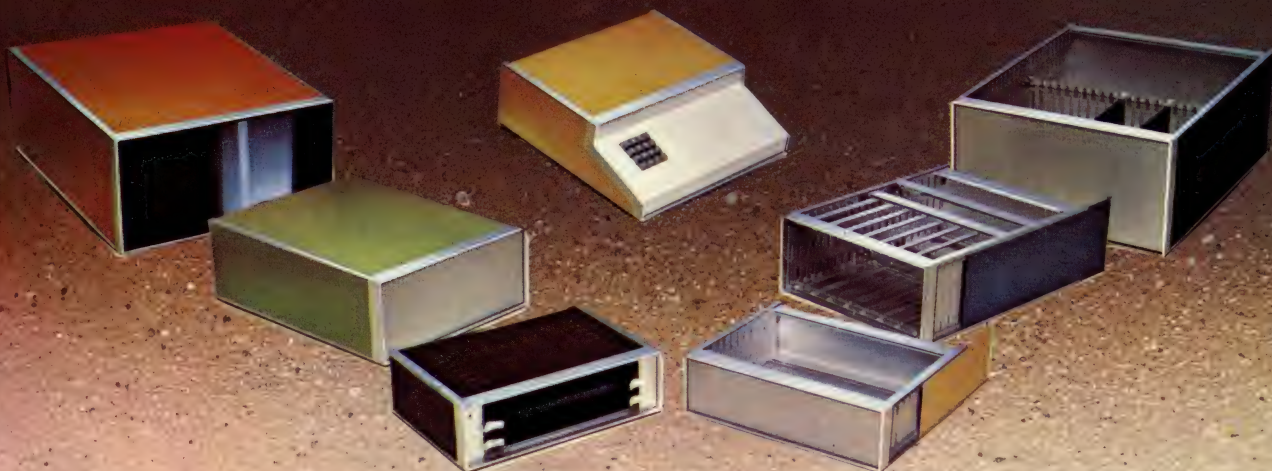

### —BEST FROM EVERY ANGLE—

Beautiful and affordable cases, unmarred by screws or fasteners. Instantly accessible interiors with slip out covers. Optional ventilation, handles, stands, slides and mounting holes. Recessed front and rear panels. Styling, finish and details can be modified to make the case uniquely yours. Low in cost.

Fully adjustable interior mounting systems for any card, module or device within size limitations. Cards or modules insert from front or rear, vertically, horizontally, or top down. Circuit cards, modules, guides, connectors, ribbon cables are available. Send for catalog. Rugged—Reliable—Versatile

● 15 STANDARD SIZES, ● 11 COLORS IN TEXTURED VINYL OR ANODIZE

● 11 STANDARD INTERIOR MOUNTING SYSTEMS, ● ONE WEEK DELIVERY IN STANDARD CASES

VECTOR ELECTRONIC COMPANY, INC., 12460 Gladstone Avenue, Sylmar, CA 91342, phone (213) 365-9661, twx 910-496-1439 530577

Our toll-free number which can be used by customers outside of California is 800-423-5659.

For more information, Circle No 47




## New Products



**PAPER-TAPE READER.** Model RR7155 has 200-cps asynchronous or synchronous read speed and 400-cps tape-positioning mode for rewinding on program cueing. Stepper-motor controlled, the 5.5-in.-high unit uses only one moving part, offers stop-on-character capability at all speeds and mounts on a 19-in. rack. An optional add-on fanfold tank assembly is available; MTBF specs at 16,000 to 20,000 hrs. \$657 (OEM qty). **Remex**, Box C-19533, Irvine, CA 92713. Phone (714) 557-6860. **Circle No 271**

**FLOPPY-DISC DRIVE.** A double-disc drive that handles two independent 5.25-in. diskettes while maintaining size

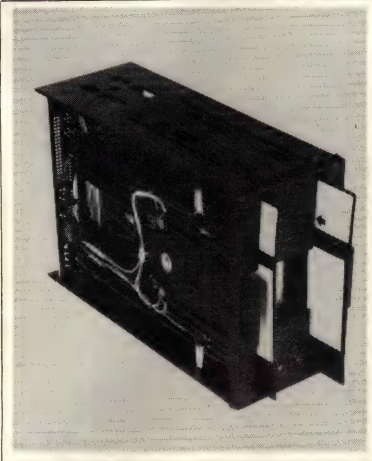

and interface compatibility with other single 5.25-in. disc drives, Model A-40 Dam provides single-side dual-density recording on 40 tracks of each diskette. Track-to-track access time of 12 msec produces a random average seek time of 170 msec. Unformatted storage capacity is 256k bytes per diskette or 512k bytes per drive. \$450. **T and E Engineering**, 1015 W 190th St, Gardena, CA 90248. Phone (213) 327-7657. **Circle No 272**



**μC SYSTEM.** A completely self-contained μC with CPU, CRT display and dual mini-floppy disc drives housed in a desktop-sized metal cabinet, Model 580 provides 64k of dynamic RAM and a 4-MHz Z80A μP. The system supports two RS-232 serial ports, two parallel ports plus a parallel printer port, one hard-disc port and one connector capable of supporting two external floppy-disc drives. All interfaces are fully programmable and expandable. A CP/M compatible ZEDOS disc operating system is included; BASIC, COBOL and FORTRAN also operate on the unit. \$6837, including operating system and a choice of one software package. **Zeda Computers International**, 1662 West 820 North, Provo, UT 84601. Phone (801) 377-9948. **Circle No 273**


## DIGITAL CASSETTE RECORDER

- Rugged, high reliability compact
- One supply, 2 moving parts, excellent speed control
- Full electronics, TTL I/O Auto-Sync® phase encode/decode
- Up to 8.5 megabits capacity

**Model CS-400A**



11950 TWELFTH AVENUE SOUTH  
BURNSVILLE, MINNESOTA 55337  
(612) 890-5135

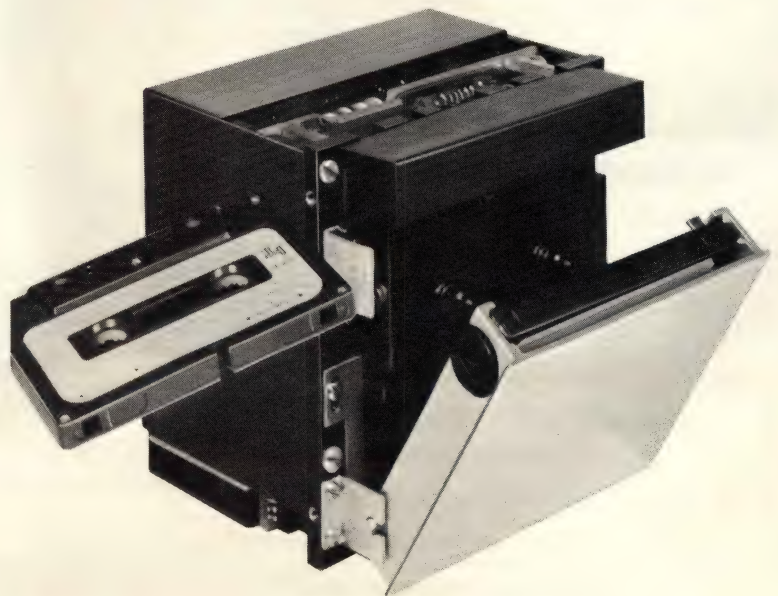

For more information, Circle No 48





Can-type Aluminum Electrolytics



Polyester & Metalized Film



Axial Aluminum Electrolytics



U.S. Corporate Headquarters



Radial Aluminum Electrolytics



Aluminum Etching Facility



Ceramic & Reduced Titanite Discs

# We're Nichicon.

**We make the right capacitor for the product you make  
and the environment it has to work in.**

Nobody goes to extremes for you in capacitors like Nichicon. We have to. We're capacitor specialists. With state-of-the-art capacitor manufacturing plants worldwide. Each a specialist in itself. Special people, special equipment, fulfilling the requirements of special customers.

And now we're servicing you better through the largest stocking facility in the United States dedicated exclusively to the warehousing, distribution and marketing of capacitors.

We're Nichicon. The name that is synonymous with "capacitors" worldwide. For further information please write or call.



**nichicon**

**We go to extremes for you.**

NICHICON (AMERICA) CORPORATION • 927 E. State Parkway • Schaumburg, IL 60195 • (312) 843-7500  
Division of Nichicon Capacitor, Ltd., Kyoto, Japan

For more information, Circle 175




# New Products

**BAND-SPLITTING MODEM.** Employing multiplexing techniques,  $\mu$ P-controlled Model DL 9600 permits several terminals and/or modems at one location to share one line and allows the combination of up to four medium-speed channels over a single high-speed line; each channel can operate independently. Operating point-to-point in full-duplex mode on a 4-wire 3002 private line at 4800 or 9600 bps (switch selectable), the modem features extensive self-testing capabilities including digital and analog loopback of remote unattended units. \$5500; \$1000 for bandsplitting option. Delivery, 30 to 60 days ARO. **Infotron Systems Corp.**, Cherry Hill Industrial Center, Cherry Hill, NJ 08003. Phone (609) 424-9400.

**Circle No 274**

**SERIAL PRINTER.** For no-frills applications where reliability is important, Model 877 receive-only bidirectional 9x7 dot-matrix unit uses 8½-in.-wide paper, features a heavy-gauge, hardened metal chassis and stainless-steel drive screw and utilizes a cartridge ribbon to

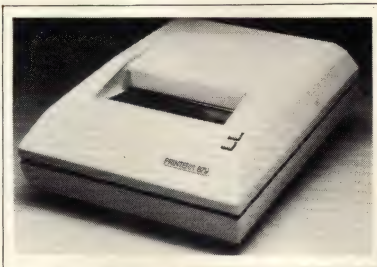

eliminate ribbon-reversing mechanisms. It prints at 120 cps, 80 characters/line, 10 cpi, using the 95-character ASCII set and operates at asynchronous baud rates of 300 to 9600. \$830 (100). **Printer Terminal Communications Corp.**, 124 Tenth St, Ramona, CA 92065. Phone (714) 789-5200.

**Circle No 275**

**FREQ - RESPONSE SIMULATION.** LINAC is a FORTRAN program for simulation and analysis of the frequency response of active or passive circuits containing only linear elements, using an efficient nodal analysis method. For minicomputers such as the DEC LSI-11 or PDP-11/05 or large mainframe units,

the current version (2.1) runs on PDP-11s under RT-11 and requires 20k words of memory. The program prints and plots the frequency response at user-requested nodes in the circuit. \$1250 for binary, user's manual, operator's manual and license. **Gary Gaugler**, Consultant, 5706 Seascape Ct, Citrus Heights, CA 95610. Phone (916) 966-8076.

**Circle No 276**

**HARD-DISC SYSTEM.** A 26M-byte (formatted) system for S-100  $\mu$ Cs, Discus M26 features the Shugart 4008 14-in. Winchester hard-disc drive, includes a metal cabinet, power supply and cables and can be used either as a table-top model or rack mounted. The unit comes with an intelligent single-board controller to supervise all data transfers and a 512-byte sector buffer; the controller can generate interrupts at the completion of each command to increase system throughput. Communication with the CPU occurs via four I/O ports. \$4995. **Thinker Toys**, 5221 Central Ave, Richmond, CA 94804. Phone (415) 524-2101. **Circle No 277**



## Just in case you need something beautiful.

Even your most sophisticated customers are influenced by the look of beauty and quality. We don't box you in with sophisticated trivia because we combine clean lines, welded and hand finished bezels in a wide selection of standard colors and structures. There's even your choice of aluminum, molded plastic or teakwood. Send for our catalog just in case.

We make you look better

**OPTIMA<sup>®</sup>**  
Scientific-Atlanta

See us at Electro '80—Booths 1133-1137

2166 Mountain Industrial Blvd., Tucker, GA. 30084 • Tel: (404) 939-6340  
Europe: McKettrick — Agnew, Macmerry, East Lothian, Scotland, EH33 1EX • Telex: 72623.

For more information, Circle No 176



# TANTALUM TECHNOLOGY: CAN IT GIVE US MORE CAPACITORS PER POUND?



Dr. John Piper  
Manager of Research and  
Development  
Electronics Division  
Union Carbide Corporation

The recent escalations in the cost of tantalum materials concern everyone who must pay more for tantalum capacitors. The situation is very similar to the oil crunch and automobiles.


In both cases, the true supply situation is distorted by spot shortages and speculation. Potential substitutes for cars or tantalum capacitors are often discussed but, in reality, are quite unattractive. The intelligent way out is through more exploration, expanded production and greater conservation.

Conservation—more capacitors per pound of tantalum—is where KEMET® Capacitor's R&D will make its biggest impact. We have, in fact, surprised ourselves by making in the lab solid tantalum capacitors with conventional KEMET Capacitor quality, but using only a fraction of the tantalum. The tantalum savings are so great, they largely offset the cost increases of materials during the last two years.

Now, the job is to get this innovation out of the pilot plants, into production, and on to you. We are in an excellent position to do the job, because we have both KEMET Capacitor's own extensive research, development and engineering staffs, plus the vast technical resources of Union Carbide Corporation backing us up.

KEMET technology is proud to play a major role in easing the tantalum crunch. Our work, together with expanded production and new mineral exploration, will assure you of a continuous supply of quality KEMET solid tantalum capacitors to meet your highest performance requirements at a reasonable cost.

That's our commitment to you.

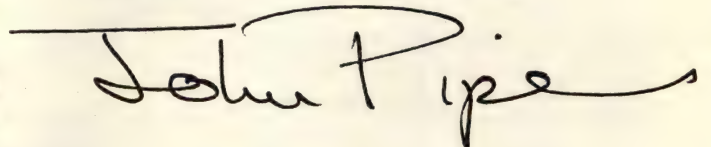

**ELECTRONICS DIVISION  
COMPONENTS DEPARTMENT**

Box 5928, Greenville, SC 29606  
Phone: (803) 963-6300; TWX: 810-287-2536; Telex: 57-0496  
In Europe: Union Carbide Europe, S.A. 5, Rue Pedro-Meylan,  
Geneva 17, Switzerland. Phone: 022/47 4411. Telex: 845-22253.  
Union Carbide U.K. Limited. Phone: 0325 315181  
KEMET is a registered trademark of Union Carbide Corporation.



# Your Data Logger Will Remember...

## ...With a Columbia Data 300D Tape Recorder

Field Proven — Connect our 300D cartridge recorder to the standard RS-232 port available on virtually every data logger made, and you have 3.5 Megabytes of data storage under control of your logger. The 300D has been field proven with most leading data loggers such as the Fluke, the Esterline Angus, Monitor Labs and the Accurex/Autodata units. But we'll stand behind our 300D with any commercially available logger having an RS-232 asynchronous port...or we'll take it back under our return policy.

**AVAILABLE IN 30 DAYS FOR UNDER \$2300...QUANTITY ONE.**

Designed for Remote Logging —The 3.5 Mbyte capacity of our 300D is available without interruption, using a serpentine recording technique to avoid rewind. A non-volatile memory stores conditions in the event of power outage...so it can automatically initialize itself for unattended re-start. The 300D is remotely pollable, for direct data access at any time.

**If you need a data logger that remembers...the Columbia Data 300D is your answer.**

**COLUMBIA**

DATA PRODUCTS, INC.

Columbia Data Products, Inc.  
Peripherals System Division


9050 Red Branch Rd., Columbia, MD 21045  
(301) 992-3400 TWX 710-862-1891



For more information, Circle No 177

## MR. CLEAN II

### The Cost Effective Solution To Contamination Problems

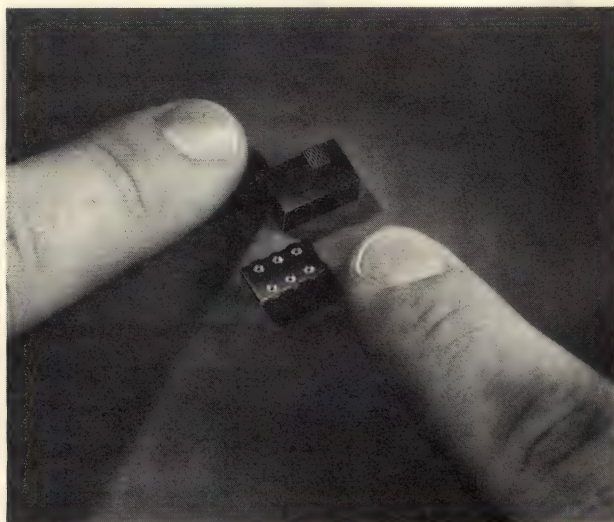

Mr. Clean II is our latest addition in our line of miniature, high quality, wave-solderable slide switches. This low cost switch is designed to work on our unique (Patented and Patents Pending) 2-piece principle. This revolutionary design allows for soldering and cleaning of only the simple exposed base half of the switch. The switching mechanism in the upper half is never exposed to any possible contamination.

These switches are designed for high reliability at a low cost. Mr. Clean II features insert molded pin terminals in a high-heat temperature resistant base. Contacts are of hard gold over nickel barrier and recommended for low energy applications. Available circuit configurations include SPST, SPDT, DPST, DPDT, and Form "Z".

Mr. Clean II is ideal for use in precision instruments and equipment, or wherever contamination during wave-soldering is found to be a problem.

Sample switches will be provided on requests stating application and annual requirements.



CHICAGO SWITCH, INC. 1714 N. Damen Chicago, Ill. 60647 312/489-5500 TWX: 910-221-5252

For more information, Circle No 178



# This is a SIDAC

The Teccor SIDAC is a unique type of two terminal thyristor switch. Basically, it is a voltage triggered, bilateral switch capable of fast turn-on with a surge rating at 20 amperes. When triggered by 120 volts, the SIDAC switches on through a negative resistance region in less than one  $\mu\text{sec}$  to a low on-state voltage of  $\pm 1.5$  volts with peak  $di/dt$  of  $30\text{A}/\mu\text{s}$ . It is capable of conducting 1 ampere RMS until the current is interrupted or drops below a holding current level of 50 mA.



The SIDAC device has been used in a variety of high energy pulse applications. Since there is no external gate connection, SIDACs eliminate the need for high voltage

zeners or other expensive voltage sensing schemes required to do the same job, and fewer components mean increased reliability.

The SIDAC is packaged in a standard TO-92 package with nonfunctional center lead, and is currently available with three voltage breakover ranges from 95 to 125 volts.

Typical SIDAC applications include:

- High voltage lamp ignitors
- Natural gas ignitors
- Gas oil ignitors
- High voltage power supplies
- Xenon ignitors
- Over voltage protector
- Pulse generators

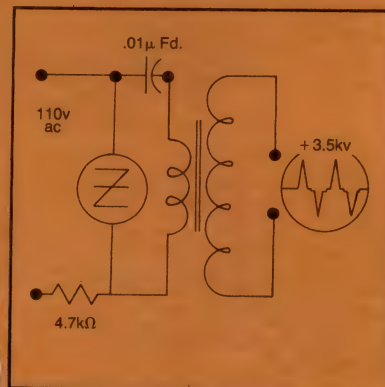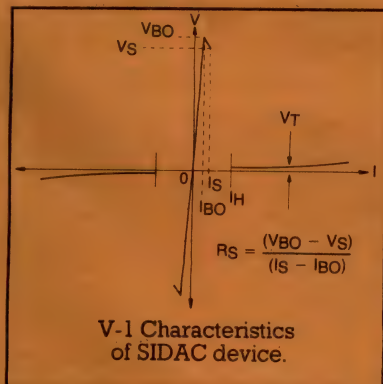

For more information concerning SIDACs, contact:


**TECCOR**  
ELECTRONICS, INC.

P. O. Box 61447 • Dallas, Texas 75261 • 214/252/7651 • TWX 910-860-5068 • TELEX 79-1600



# New Products

## INSTRUMENTATION & POWER SOURCES

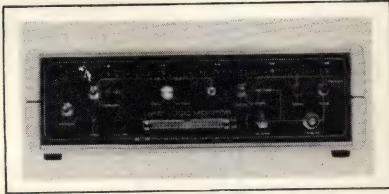

**LOGIC MONITOR.** With adjustable threshold levels and 0.5-M $\Omega$ , 6-pF input, Model LM-3 provides 40-channel logic-state indications of any solid-state logic family. Threshold selections include: a fixed 2.2V for TTL devices, a front-panel-controlled -5 to +10V level and a value equal to 70% of the sampled supply voltage. The 40-LED display follows input data during Run-mode operation. A Retrig mode permits an external trigger signal or manual pushbutton to freeze the display; a Latch mode disables external or manual triggering until after operation of an Arm pushbutton.

Forty clips (preassembled on a ribbon cable that plugs into the unit's keyed,

locking front-panel receptacle) provide connection to the circuit under test. A front-panel switch allows rising- or falling-edge triggering. \$585. **Continental Specialties Corp.**, 70 Fulton Terrace, New Haven, CT 06509. Phone (203) 624-3103. **Circle No 331**



**μC ANALYZER.** You can troubleshoot 6800-μP-based systems by single stepping through development or diagnostic programs with the hand-held, μP-based Model T-8. The unit stores information from 63 machine cycles occurring before a user-selected break-

point, provides test data on an 8½-digit display and connects to the μC under test via a 40-pin chip clip. Field-interchangeable interfaces allow testing of 2650, Z80, 8080, 6502, 6505, 8060 and 8085 μCs. \$745; each interface, \$50. **Patuck Inc.**, 5073 Russell Ave, Pennsauken, NJ 08109. Phone (609) 662-0677. **Circle No 332**

**CRT POWER SUPPLY.** A 28V source powers the dedicated dc/dc Model RMC18PX900. The unit provides 18 kV (±5%) at 200 μA, a focus voltage of 800V at 200 μA, a 300 to 600V grid-#2 voltage at 200 μA, and -45V at 40 μA for grid #1. Line regulation for a ±5% change is 0.02% for all outputs. Anode-load regulation equals 0.05% (static) and 0.3% (dynamic) for a 0 to 200-μA load change; full-load ripple equals 0.1% p-p. The auxiliary outputs regulate to 0.5% for a 10% load change and limit ripple to 0.1% p-p. From \$175 (OEM qty). Delivery, stock to 12 wks ARO. **Spellman High Voltage Electronics Corp.**, 7 Fairchild Ave, Plainview, NY 11803. Phone (516) 349-8686.

**Circle No 333**

## CONTROL SWITCHES PRODUCT DIGEST



Basic specs, circuits, options and other data in condensed, graphic format for quick and easy reference and research.

- Tap, Transfer & Selector Switches
- Instrument & Control Switches
- UL Listed at 10A-125VAC
- Fast Deliveries!



**ELECTRO SWITCH**

Weymouth, Massachusetts 02188

Telephone: 617/335/5200 • TWX: 710/388/0377

## ROMAID LETS YOU CONTROL YOUR SOFTWARE PROBLEMS

### • EASY TO USE

Simply connect ROMAID's cable to the PROM socket in your circuit

### • VERSATILE


Capable of in-circuit PROM emulation while maintaining maximum reprogramming flexibility

### • COMPLETELY PORTABLE

Measuring only 7.5" x 3.5" x 1.6"

### • QUICK

User selects one of 5 modes of operation: Duplicate, Find, Verify, Edit or Run. Entries on Keyboard are then fast 'n' easy

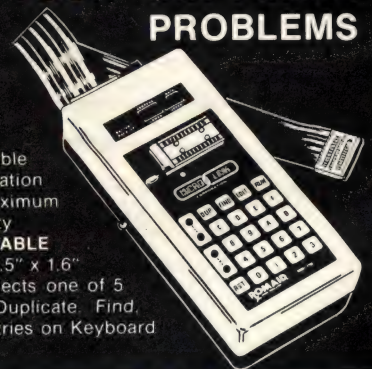

The ROMAID PROM Simulator lets you put downtime at a minimum when software problems arise. It features in-circuit emulations of the most popular 1K x 8 and 2K x 8 PROMS and has full 6 digit hexadecimal display for address and data information.

Ease of operation and program manipulation, portability and versatility will make the ROMAID PROM Simulator the answer to your software debugging problems.

And we're saving the best till last... Price! ROMAID costs less than other PROM Simulators on the market today. Let us tell you more about how this revolutionary software "debugger" can save you time and money.

Write today to:



624 S. Range Line Road  
Carmel, Indiana 46032  
Phone (317) 846-1721



# A pot for every purpose



## Spectrol Pots, Trimmers, Dials, and Switches

Spectrol's been supplying the industry with precision potentiometers and related components since 1954. Today, the Spectrol catalog carries more than 150 pages of product illustrations and detailed specifications, covering both wirewound and non-wirewound precision and trimming potentiometers, concentric and digital turns-counting dials, and miniature rotary switches. Send for your copy of the Short Form of our new Spectrol Catalog, or, for the unabridged version, contact your local Spectrol representative.

# Spectrol

**SPECTROL ELECTRONICS GROUP**

**UNITED STATES** Spectrol Electronics Corporation P.O. Box 1220, City of Industry, Calif. 91749, U.S.A. • (213) 964-6565 • TWX (910) 584-1314

**UNITED KINGDOM** Spectrol Reliance Ltd. Drakes Way, Swindon, Wiltshire, England • Swindon 21351 • TELEX: 44692

**ITALY** SP Elettronica SpA Via Carlo Pisacane 7, 20016 Pero (Milan) Italy • 35 30 241 • TELEX: 330091

**GERMANY** Spectrol Electronics GmbH Oberauerstrasse 15, 8000 Munich 70 West Germany • (089) 7145096 • TELEX: 5213014

*For more information, Circle No 182*



# HOW IT FEELS TO HAVE A HEART ATTACK

The way a heart attack feels can vary. So how can you be sure that what you're feeling is really a heart attack?

By remembering this.

If you feel an uncomfortable pressure, fullness, squeezing or pain in the center of your chest (that may spread to the shoulders, neck or arms) and if it lasts for two minutes or more, you could be having a heart attack. Severe pain, dizziness, fainting, sweating, nausea or shortness of breath may also occur. Sharp, stabbing twinges of pain are usually *not* signals of a heart attack.

Your survival may depend on getting medical attention as quickly as you can. Call the emergency medical service immediately. If you can get to a hospital faster in any other way, do so.


Don't refuse to accept the possibility that you are having a heart attack. Many heart attack victims do just that. They say it's indigestion or tension. They worry about embarrassment. They often wait three hours or longer before getting help.

But before those three hours are up, one out of two is dead.

Remember what you've just read. The time might come when your life will depend on it.

The American Heart Association   
**WE'RE FIGHTING FOR YOUR LIFE**

## New Products

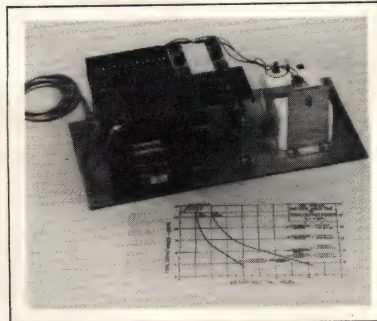

**UPS.** For systems with an essential-circuitry power bus isolated from the main dc bus, the UPS-2708B maintains memory and refresh logic power during outages or system shutdown. With twice the capacity of its -2708A predecessor, the unit delivers 3A at 5V ( $\pm 0.5\%$ ) and 1A at 12V ( $\pm 0.5\%$ ), derived from its 12V 5-Ahr sealed lead-acid battery. It operates on 100 to 127V, 50- or 60-Hz input, and features protection against overvoltage and short-circuits. \$365 (100). Delivery, stock to 12 wks ARO. **Stevens-Arnold Inc.**, 7 Elkins St., South Boston, MA 02127. Phone (617) 268-1170. **Circle No 334**

**X-Y-Y RECORDER.** The 2-pen DIN A3 Model 6432 recorder features electrostatic paper holddown with two pinpoint light marks on the chart table for easy setup of the paper, full-scale zero adjustment, rack-mount capability and remote and local penlift. It has 15 switch-selectable continuously variable ranges from 0.2 mV/cm to 10V/cm. The built-in time base sweeps the X-axis with six calibrated ranges of 0.2 sec/cm to 10 sec/cm. The writing speed of 600 mm/sec for three axes allows accurate recordings of fast-changing input signals. \$3495. Delivery, 60 days ARO. **Soltec Corp.**, 11684 Pendleton St., Sun Valley, CA 91352. Phone (213) 767-0044. **Circle No 335**

**POWER ANALYZER.** Microprocessor control eases power measurement with Model 4612, which features operator-controlled averaging of amperes, volts and watts; it simultaneously displays the true-rms value of each parameter with floating-point notation. Typical accuracy specs at better than  $\frac{1}{2}\%$  on all 25 pushbutton-selected ranges (to 50A and 600V) with no need for burden compensation or other correction. Options include analog and digital outputs. \$2385. Delivery, 6 to 8 wks ARO. **Magtrol Inc.**, 70 Gardenville Parkway West, Buffalo, NY 14224. Phone (716) 668-5555. **Circle No 336**



**Like to see  
somebody putting  
connectors together  
your way...right away?**

**ELCO** The  
reliable  
connection



## **ADAP\* can make it happen as near as an Elco distributor.**

Let's say you're in a big hurry to get a connector that's somewhat different than any your Elco distributor has on his shelves. Or, maybe you want a standard, catalog item that's temporarily out of stock.

Either way, no problem. Thanks to Elco's Authorized Distributor Assembly Program (ADAP), you can get an ample supply of connectors to answer your immediate needs immediately. Under this program, every authorized Elco distributor now has the components and specialized equipment for

assembling both custom and standard connectors to order . . . in 1,000's of variations . . . instantaneously.

*So just name it and you got it:* card-edge connectors, 2-piece pc connectors, and rack and panel connectors. Speed of delivery depends primarily upon how close you are to an Elco distributor.

For the name of Elco distributors near you and a copy of our Distributor Connector Guide, write to ELCO Connector Division, Huntingdon Industrial Park, Huntingdon, Pa. 16652. Tel. 814-643-0700. TWX 510-691-3117.

**\*Authorized  
Distributor  
Assembly  
Program  
gives you the Elco Edge.**

**GW** **Elco  
Corporation**  
a Gulf + Western manufacturing company


For more information, Circle No 185



# Diceon Says Get Aboard.

When you get a board (or a thousand boards) from Diceon, you get uncommon quality and meticulous workmanship at a very competitive price.

As a full-line supplier of **total interconnection packages**, Diceon offers you proprietary production techniques that assure top reliability and performance at near-zero rejection rates.

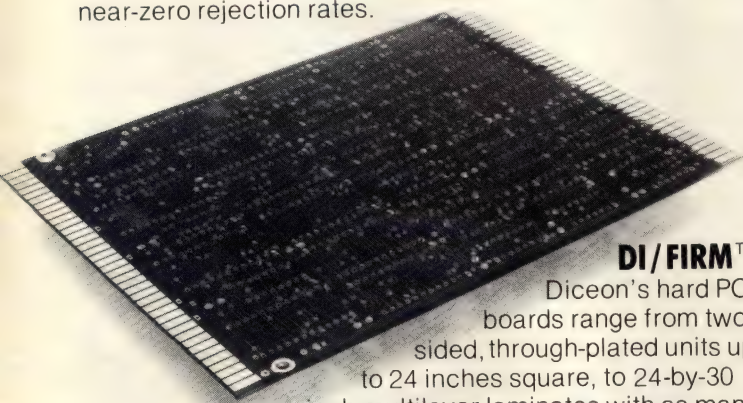

## DI/FIRM™

Diceon's hard PC boards range from two-sided, through-plated units up to 24 inches square, to 24-by-30 inch multilayer laminates with as many as 12 circuit layers, including back panels.

Sophistication? DI/FIRM boards feature conductor and spacing widths down to .006 inch, in designs of virtually any complexity, plus solder-mask-over-bare-copper construction that eliminates solder bridging and touch-up time.


As innovators in the flex interconnection field, with production experience in a very broad range of designs, Diceon can produce any flex printed circuit you specify.

DI/FLEX is available in polyimide films with FEP, TEP, or acrylic adhesive systems, in single, double-sided, or multilayer styles . . . up to 10 or 12 layers!

## DI/FOLD™

Diceon gives you the best of the hard and flex printed circuit worlds in efficient, space-saving interconnection packages.

Install the circuit components on DI/FOLD in the conveniently accessible "open" configuration; wave solder; then simply fold and assemble the board into your chassis.

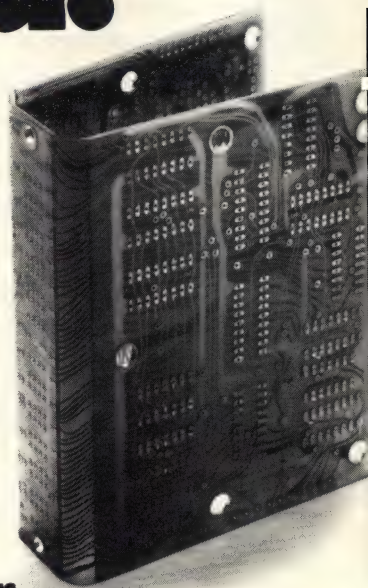

## DICEON: THE PC SPECIALISTS

Our facilities include the latest equipment and control techniques for producing your PC board designs. Our "secret ingredient" is people . . . Diceon people whose years of experience and craftsmanship make each state-

of-the-art board a work of art.

So "get aboard" with Diceon. Send back the coupon or call today to Customer Service at (714) 833-0870.

## DI/FLEX™



**Customer Service** Yes, I'd like to know more about Diceon:

- ☐ Send me your facilities and capabilities brochure
- ☐ Send me your DI/FIRM multilayer PC board brochure
- ☐ Send me your DI/FLEX - DI/FOLD flex circuit brochure
- ☐ Have an applications engineer contact me
- ☐ Have a sales representative contact me

Name \_\_\_\_\_  
 Title \_\_\_\_\_  
 Company \_\_\_\_\_  
 Address \_\_\_\_\_  
 City \_\_\_\_\_  
 State \_\_\_\_\_ Zip \_\_\_\_\_  
 Phone \_\_\_\_\_ (Area) \_\_\_\_\_ (Number)


# Applied Magnetics Diceon

18522 Von Karman Avenue, Irvine, California 92714 • (714) 833-0870 • TWX 910-595-1794

For more information, Circle No 186



## New Products

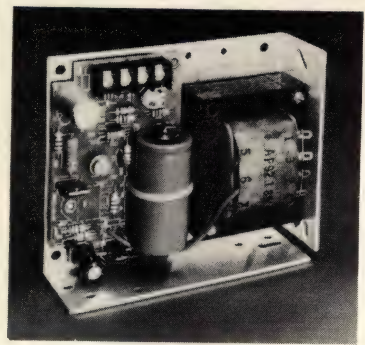

**LINEAR SUPPLIES.** EAPS U Series devices operate from a 103 to 130V or 206 to 260V (47 to 63 Hz) input and deliver 5V at 3A, 12V at 1.6A, 15V at 1.5A or 24V at 1A. Regulation is  $\pm 0.05\%$  (line) and  $\pm 0.1\%$  (load), with ripple limited to 5 mV p-p max. The 4x4.87x2.07-in. units feature rated power to 50°C, electrostatically shielded transformers, reverse-polarity protection, hermetically sealed IC regulator, UL-recognized glass/epoxy circuit boards and a 5-yr warranty. \$23.25; optional overvoltage protection, \$1.50. **Adtech Power Inc.**, 1621 S Sinclair St, Anaheim, CA 92806. Phone (714) 634-9211.

Circle No 337

**EPROM PROGRAMMER.** Designed to program the 2732A, Model PM9074 generic personality module will also accommodate other, yet-to-be-developed HMOS EPROMs and higher density PROMs (including 64k devices). Plugging the unit into a Series 90 PROM programmer master control unit permits listing, programming, duplication and verification. Features include cold sockets that allow installation and removal of PROMs without applying  $V_{CC}$  to the sockets and high/low voltage verification to permit reading of PROMs with  $V_{CC}$  adjusted to its high and low limits. \$550. Delivery, 6 to 8 wks ARO. **Pro-Log**, 2411 Garden Rd, Monterey, CA 93940. Phone (408) 372-4593.

Circle No 338

**WAVEFORM DIGITIZER.** The programmable Model 7612D captures, digitizes and stores signals for subsequent computer processing. The 2-channel GPIB-compatible instrument features 200-MHz max sampling frequency, 8-bit resolution, two time bases and 2048 8-bit words of memory per channel, with selectable record length. It allows pre/post-triggering, up to 13 sample-rate changes per record and multiple waveform capture.  $\mu P$  control monitors

incoming data and avoids incompatible settings. \$24,000. **Tektronix Inc.**, Box 1700, Beaverton, OR 97077. Phone (503) 644-0161.


Circle No 339

**HIGH-VOLTAGE PROBE.** Combining Model HV40B with any of a wide range of instruments permits measurement to 40,000V dc or peak ac. The unit has a 1000:1 voltage-division ratio (VDR) when

terminated by 1 or 10 M $\Omega$  and a 2000:1 VDR when terminated by 20 M $\Omega$ . Features include retractable safety-sleeved 4-mm banana plugs, a probe body with rectangular safety shields to prevent rolling, a 2m cable with attached alligator clip and a cable for chassis ground. \$75. Delivery, 6 to 8 wks ARO. **Test Probes Inc.**, Box 2113, La Jolla, CA 92038. Phone (714) 459-4197.

Circle No 340

## Disk Memory Power Supplies

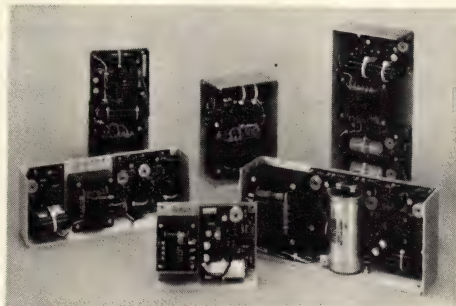

Power-One, a leading supplier to the Disk Drive Industry, now offers a complete line of power supplies for FLOPPY DISK and new WINCHESTER FIXED DISK applications.

Call or Write for our New Catalog.

### WINCHESTER FIXED DISK

SHUGART - CENTURY - MICROPOLIS are just a few drives powered by this new universal model. Powers (1) Winchester drive plus controller circuitry.

1st Output	2nd Output	3rd Output	Model	Price (1-9)
+ 5V @ 9A	- 5V or - 12V @ .8A	+ 24V @ .7A/4.5A PK	CP384	\$120.00

### FLOPPY DISK - 5 1/4" MEDIA

BASF - SHUGART - PERTEC - SIEMENS plus all other popular 5 1/4" media drives.

1st Output	2nd Output	Model	Price (1-9)
+ 5V @ .5A/.7A PK	+ 12V @ .9A/1.8A PK	CP340	\$ 44.95
+ 5V @ 2A	+ 12V @ 4A	CP323	\$ 74.95

CP323 powers up to (4) drives simultaneously.

### FLOPPY DISK - 8" MEDIA

SHUGART - PERSCI - CDC - WANGCO plus many other single and multiple drive applications.

1st Output	2nd Output	3rd Output	Model	Price (1-9)
+ 5V @ 1A	- 5V @ .5A	+ 24V @ 1.5A/1.7A PK	CP205	\$ 69.95
+ 5V @ 2.5A	- 5V @ .5A	+ 24V @ 3A/3.4A PK	CP206	\$ 91.95
+ 5V @ 3A	- 5V @ .6A	+ 24V @ 5A/6A PK	CP162	\$120.00
+ 5V @ 1.7A/2.2A PK	- 5V @ .15A/.2A PK	+ 24V @ .2A/3A PK	CP272A	\$ 91.95
+ 5V @ 2A	+ 12V @ .4A	- 12V @ .4A	HTAA-16W	\$ 49.95

CP272A powers Persci Drives (includes unregulated 7 - 10V @ 1.2A/10A PK). HTAA-16W powers Persci controller.



**Power-One D.C. POWER SUPPLIES**

Power One Drive • Camarillo, CA 93010 • (805) 484-2806 • TWX 910-336-1297  
Eastern Regional Headquarters • (518) 399-9200



## New Products



**LCD DMM.** 0.1% dc-measurement accuracy and a 0.5-in.-high 3½-digit display highlight Model LC5000. A 9V alkaline battery provides more than 6 months of operation on five true-rms ac and five dc voltage ranges from 200 mV to 1000V, five dc current ranges from 200  $\mu$ A to 2A and six resistance ranges from 200 $\Omega$  to 20 M $\Omega$ . The 3×8×9-in. unit features banana-plug receptacles, fused input and a 1-yr limited warranty. \$169.95. **DSI Instruments Inc.**, 9550 Chesapeake Dr, San Diego, CA 92123. Phone (714) 565-8402. **Circle No 341**

**DIGITAL THERMOMETER.** The handheld Model 42822 provides  $\mu$ C-controlled accuracy of  $\pm 0.1^\circ$  from 0 to 110°C. The unit features an LED display



that indicates  $^\circ$ C or  $^\circ$ F, a NiCd battery that provides up to 4 hrs operation per charge and an ac adapter. \$169.95; air probe, \$24.95; surface probe, \$19.95. **Edmund Scientific Co.**, 7082 Edscorp Building, Barrington, NJ 08007. Phone (609) 547-3488. **Circle No 342**

**PROM PROGRAMMER.** A 4-ft flat ribbon cable connects the Model PP-2532 to any read-only PROM socket via a 24-pin plug, forming a table-top programmer for the TMS 2532 EPROM. Each unit comes with an internal dc/dc switching regulator and zero-insertion-force socket. \$295. **Oliver Advanced Engineering Inc.**, 676 W Wilson Ave, Glendale, CA 91203. Phone (213) 240-0080. **Circle No 343**



**PORTABLE  $\mu$ P LAB.** The Portable Training Lab (Course 525A) consists of 20 self-training modules (4 vols, 1650 pgs) and a complete 8080A-based hardware system. The texts cover programming fundamentals, real-time-interrupt handling, control of programmable interfacing devices and closed-loop control-system implementation. Each module provides hands-on experiments that involve program coding and execution. \$1595. **Integrated Computer Systems Inc.**, Box 5339, Santa Monica, CA 90405. Phone (213) 450-2060. **Circle No 344**

# HOW TO ADD CONDUCTIVITY TO PLASTIC HOUSINGS WITHOUT ADDING A LOT OF COSTS.


You don't need special surface preparation, complicated equipment or special training to apply Xecote® Conductive Coating by Metex.

All you need is a standard sprayer and a gallon of Xecote per 270 square feet.

Xecote adheres to a wide range of plastics. And, when used with Xeprime® Primer, it adheres to polyester substrates, carbon fiber, Kevlar and iridited aluminum.

No other shielding company gives you that option. Then again, no other shielding company gives you as many options as Metex.

The producer of the largest line of shielding products in the world.

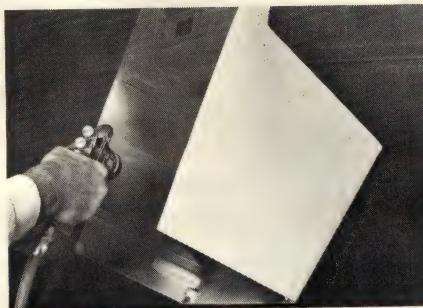

So if you want a conductive coating that's as easy to use as paint, write or call: Metex Electronic Shielding Group, a unit of Metex Corporation, 970 New Durham Rd., Edison, NJ 08817. (201) 287-0800.

Or 20437 S. Western Avenue, Torrance, Calif., 90501. (213) 320-8910.

For more information, Circle No 188

## XECOTE® SPECIFICATIONS:

**Surface Resistivity:** Less than 1 ohm per square at .002-.003 inches dry per ASTM-D257.

**Shielding Effectiveness:** Better than 40db.

**Adhesion:** Passed crosshatch tape test ASTM D-3359 after thermal shock and humidity aging. Passed 48-hour salt spray test per MIL 202E.

**Application:** Use standard pressurized spray equipment.

**Typical Substrates:** Acrylics, Polycarbonate, ABS, Polyphenylene Oxide and similar plastics.

**METEX**  
ELECTRONIC SHIELDING GROUP



# Put on the versatile coating that lets your product give an all-star performance: Elastoplastic silicone resin.

Flexibility, toughness, versatility—you'll discover that Dow Corning elastoplastic silicone resin has it all—everything it takes to protect product dependability. Check these advantages, with your product in mind:

**Super when it's sizzling...or frigid.**

Your product has to take the heat? Elastoplastic resin coating withstands heat up to 390 F/200 C, remains stable over a wide temperature range. Put on the same coating when it's cold! At -85 F/-65 C, it does the job!

**All that stretch...and no stress.**

Elastoplastic silicone has a lot to give. Even harsh environmental conditions won't faze it! The tough, yet smooth clear coating resists dirt pickup, so your product stays clean; resists effects of weather and ultraviolet light, too.

**It may be the heat, or the humidity, but—**  
neither will affect the job. From microwave to power frequencies,

**Now on the Qualified  
Product List for  
Mil spec I-46058:  
Insulating compound-  
electrical for coating  
printed circuit  
board assembly.**

dielectric properties are excellent, and consistent, even in applications where high humidity is a factor. Possible leakage is reduced, because moisture permeability is extremely low.

**Brush, flow coat or dip on...as you like it.**

Apply coating easily, as thick or thin as you need it. Its noncorrosive cure can match your process, at room temperature or under heat acceleration. The coating's repairable, so components are easy to fix or replace, and recoat.

Many places to use Dow Corning elastoplastic resin coating? You bet.

Want to know more?  
Get a sample!



**DOW CORNING**

DOW CORNING

Please tell me more about Dow Corning elastoplastic silicone resin, and about how it can help me.

☐ Send complete product literature.  
☐ Ask a sales representative to call me about getting a sample.

Name

Title

Company

Address

City  State  Zip

Telephone

Mail to: Dow Corning Corporation  
Dept. E-7539  
Midland, Michigan 48640

©Copyright Dow Corning Corporation 1978



## OUR NEW TAP-A-DIP<sup>TM</sup> AND COORDINATED SYSTEM OF TROUBLE SHOOTERS SIMPLIFY DIP TESTING



**TAP-A-DIP 14 PIN MODEL—NO. 300-14 16 PIN MODEL— NO.300-16**

**POSITIVE LOCK-ON DESIGN**—End contacts of TAP-A-DIP lock under each of the end leads on DIP...eliminates popping off and causing shorts.


**NARROW PROFILE**—Width is the same as DIP Mounting Socket. Ideal for high density boards since critical width does not change during insertion and removal.

**WIPING ACTION**—.025" Square Gold-Plated Beryllium Copper Spring Contacts are shaped to provide wiping action during insertion...assures positive contact.

**BARRIER STRIPS**—Strong, Glass-Filled Injection Molded Body provides Barriers between each contact to prevent lead shorting.

**COLOR-CODED**—Model 300-14 coded Black, 300-16 coded Yellow.

**CONTOURED GRIP**—Handles compress easily to open jaws for attaching and locking TAP-A-DIP to the DIP...must be compressed again to remove from DIP.

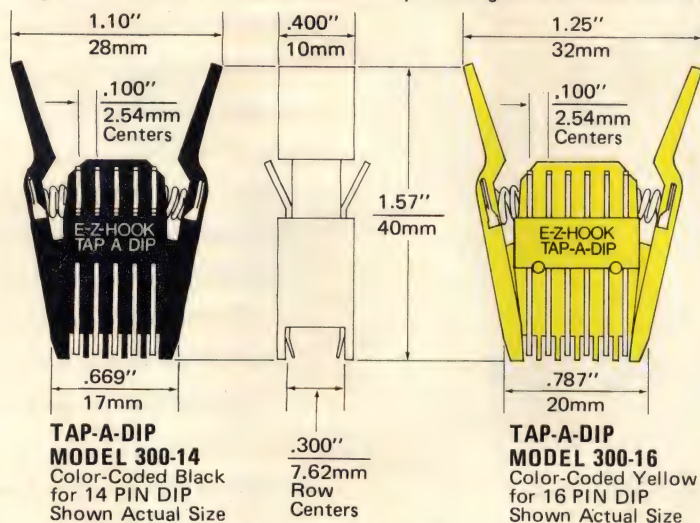

**TAP-A-DIP'S INTERCONNECT WITH E-Z-HOOK TEST LEAD AND JUMPER ASSEMBLIES OF E-Z-MICRO-HOOK, E-Z-MINI-HOOK AND .025" (.635mm) SQUARE SOCKETS...EACH AVAILABLE IN A WIDE SELECTION...TO LET YOU DESIGN YOUR SYSTEM TO SUIT YOUR SPECIFIC REQUIREMENTS.**

SEND FOR COMPLETE NEW CATALOG AND PRICE LIST

**E-Z-HOOK<sup>®</sup>**  
 A DIVISION OF TEKTEST, INC.

114 EAST SAINT JOSEPH STREET  
 ARCADIA, CALIFORNIA 91006  
 (213) 446-6175 / TWX 910 582 1614

PATCH CORDS ■ COAXIAL JUMPERS ■ E-Z-PROBES 52 AND 54-1

For more information, Circle No 190

## New Products



**VIDEO GENERATOR.** Designed for CCTV and monitor applications as well as VTR and TV adjustment and repair, Model 240 features both video and adjustable RF output, a 10-step gray-scale staircase, 3- and 10-bar gated rainbows, a trigger output and built-in battery check. Controlled by a thumb-operated integrated slide switch, the unit generates 11 video or RF patterns and operates from an ac adapter (included with unit) or two 9V batteries. \$159. **Hickok Electrical Instrument Co.**, 10514 Dupont Ave, Cleveland, OH 44108. Phone (216) 541-8060.

Circle No 345

**THERMOMETER.** Applications requiring 0.01°C resolution and high stability benefit from Series 4000 units. Instrument accuracy (for 90-day recalibration interval) specs at  $\pm 0.08^\circ\text{C}$  or  $\pm 0.1^\circ\text{F}$ , and custom calibration provides total system accuracy (instrument and sensor) of  $\pm 0.05^\circ\text{C}$  over a limited range. Available models provide either  $^\circ\text{C}$  or  $^\circ\text{F}$  readouts and feature multiple inputs, analog and BCD outputs and digital alarms. Delivery, stock to 10 wks ARO. From \$595. **Instrulab Inc.**, Box 426, N D Station, Dayton, OH 45404. Phone (513) 223-2241.


Circle No 346

**TIMER/COUNTERS.** Using an 8-bit  $\mu\text{P}$ , Series 9000A units permit handshake interface commands in 8  $\mu\text{sec}$ —at least 10 times faster than their Series 9000 predecessors. Access to pulse-parameter and arithmetic capabilities through the GPIB interface permits improved operator control. Four models with frequency ranges to 512 MHz are available. Functions provided include period, period average, time interval, time-interval average, totalize and ratio. \$2995 to \$4295. **Racal-Dana Instruments Inc.**, 18912 Von Karman Ave, Irvine, CA 92715. Phone (714) 833-1234.

Circle No 347



# MICROPROCESSOR GLITCHES: MEET YOUR FIXER.

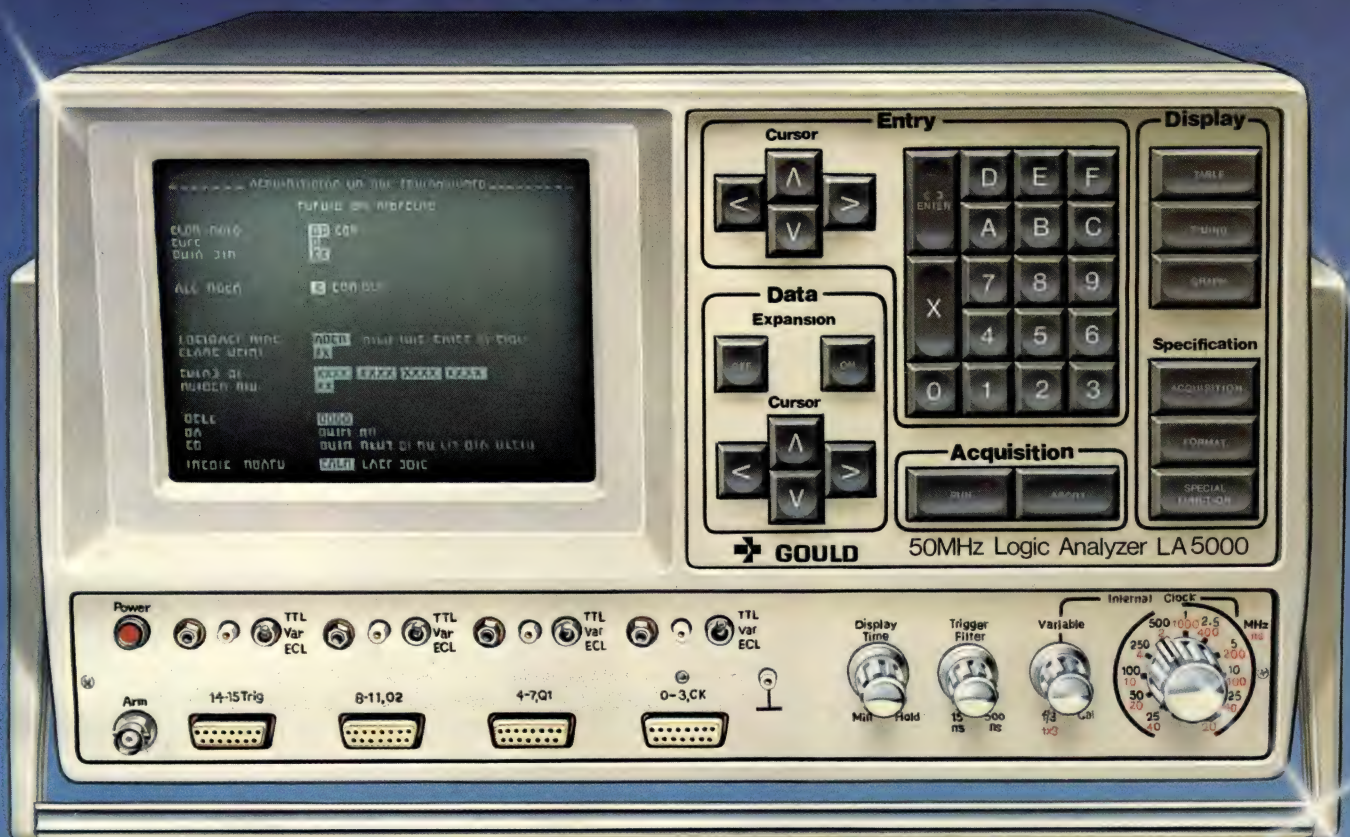

## Biomation's new LA-5000 50MHz logic analyzer brings the convenience of our K100-D to microprocessor designers.

Following our K100-D, which sets the industry standards for digital system debugging, Biomation brings you a new glitch fixer, the LA-5000. A logic analyzer matched in cost and capability to the needs of microprocessor system designers.

The LA-5000 is ideal for data domain and timing analysis with clock rates from 12.5 MHz with 16 recording channels, to 50 MHz with 4 channels. Three display modes give you: data domain information in binary, octal or hexadecimal; timing diagrams; even a graphic plot of successive word values.

Three full screen interactive menus — Acquisition, Format, and Special Function — make set-up fast and simple. There are also partial menus of frequently needed parameters as part of the display modes.

Convenience features? The LA-5000 features two

memories with an auto-stop function to simplify fault-finding. Reverse video highlighting calls attention to memory differences. The reference memory is easily accessible via the keyboard. And, a memory search feature matches like sequences in both working and reference memories.

Introduce the glitches plaguing your system to their fixer. You'll enjoy efficient system debugging at a price well below what you'd expect to pay. For more information on the LA-5000, or any of Gould's full line of logic analyzers, write:

Gould Instrument Division,  
Santa Clara Operations,  
4600 Old Ironsides Drive,  
Santa Clara, CA 95050.  
Or call (408) 988-6800.



An Electrical/Electronics Company


For more information, Circle No 191

*Got a glitch?*  
**GLITCH  
FIXER**  
FROM GOULD




# Berg's 0.025" PV™ receptacle

## And do it time...after time

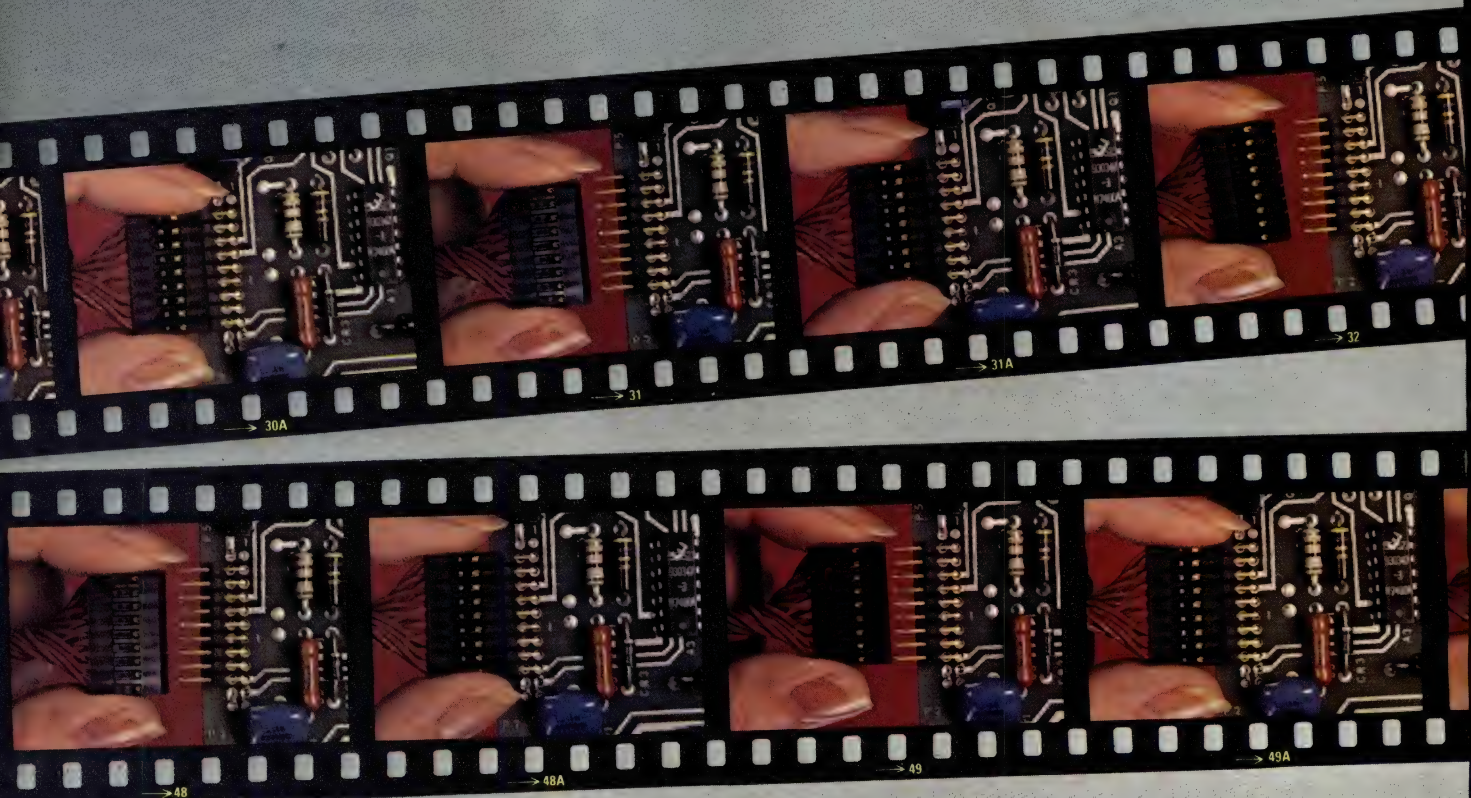

The secret to the durability of the "PV" lies in our unique dual-metal design. This combination of metals results in optimum mechanical and electrical performance.

**A. The heat-treated beryllium copper spring** maintains constant mechanical pressure on pins. Even after repeated insertion/withdrawal cycling.

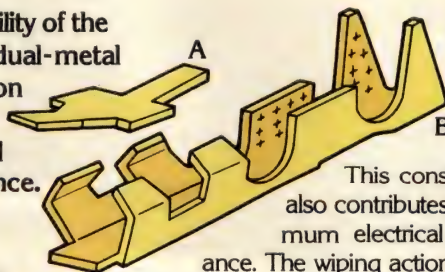

This constant force also contributes to maximum electrical performance. The wiping action between pin and contact area, created by high normal force during mating, cleans the contact surfaces of oxides.

**B. The brass body, working with the**


spring, provides optimum conductivity—an excellent 5 milliohms contact resistance or less. And brass facilitates crimping and extends application tool life.

**The "PV" line allows wide design flexibility.**

A choice of three spring thicknesses are available to help meet specific insertion/withdrawal force requirements. There are four terminal variations in crimp-to-wire sizes from AWG 18-36. The wide variety of



# Deliver low contact resistance. ...after time...after time...

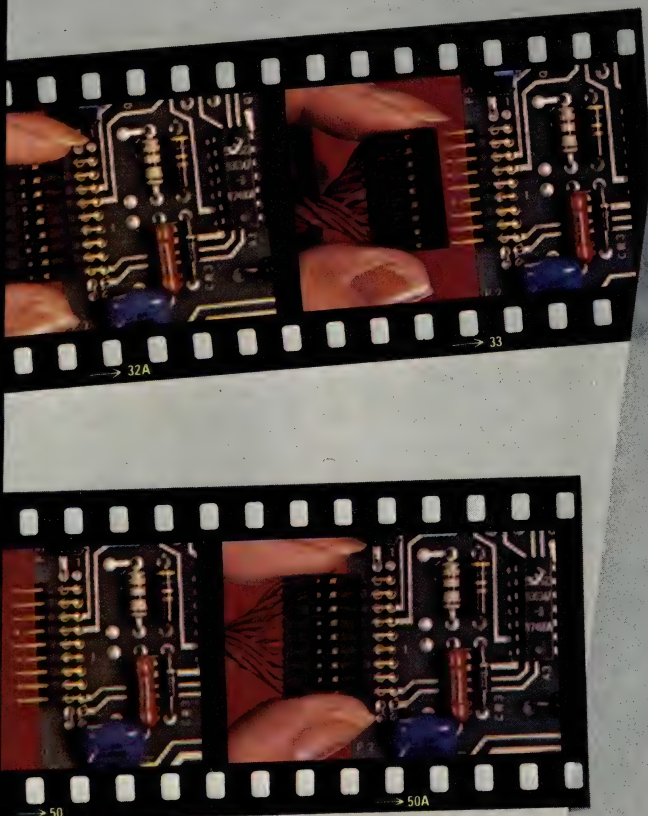

<b>Berg Electronics</b>		<b>PRODUCT EVALUATION</b>	
NEW CUMBERLAND, PA.			
REPORT NO.	00447	TEST FILE NO.	1000-123
<b>SUBJECT:</b> "PV" 0.025" Receptacle.			
<b>PURPOSE:</b> To determine contact resistance after repeated cycling.			
<b>CONCLUSION:</b> After the 50th cycle, no measurable increase in contact resistance.			

types and sizes, and the option of several gold or tin-lead platings, offer maximum design flexibility.

**The Berg "PV" is the heart of the most complete 0.025" interconnection system available today. The BergCon™ system.**

The "BergCon" system consists of a variety of mateable terminations for board-to-board, cable-to-board, or cable-to-cable packaging:

- BergStik™ pins, conveniently molded in plastic, can be manually inserted into P.C. boards for on-line production without a machine.
- Standard housings allow simultaneous connection of as many as 72 "PV" terminated connectors.
- Low cost, easy to load hand tools available through distributors make the "BergCon" system practical for even the lowest-volume user. Or a low cost air-operated applicator is available from Berg.
- And the entire "BergCon" system is Underwriters recognized.

For detailed information on the complete "BergCon" system, write or call: The Du Pont Company, Berg Electronics Division, New Cumberland, Pennsylvania, 17070, Telephone: (717) 938-6711. Or contact your nearest Berg Electronics connector distributor.  
In Europe: 's-Hertogenbosch, Netherlands, Telephone: (31) 73-215255.

## Innovations for Electronics

# Berg Electronics





Our new, dual-channel Model 619 electrometer/multimeter offers you electrometer sensitivity, multimeter ease, systems capabilities and will not interfere with system level decisions. Unless you want it to.

The 619 is loaded with real-world features which make it as flexible as your imagination. It will correct for internal voltage offsets, store up to 50 readings for examination later at the convenience of the system, define a baseline allowing you to read either absolute values or deviations from the baseline—all automatically.

Optional dual-channel capability gives you two instruments for the price of one. Ratio. Difference. Capability for charge or logarithmic current measurement. Speeds up to 18ms/conversion. 4½ or 5½ digit resolution. On the bench or on the IEEE-488 bus.

As an electrometer. As a systems multimeter. As a picoammeter. As a current source.

# It lets you decide what it should or shouldn't do.

From its status-at-a-glance annunciators to its programmable trigger modes, every detail of the 619 was painstakingly thought through to give you, the user, full command of the instrument and your application.

Sensitivity. Adaptability. Ease of use. Value. If ever there was an example of Keithley's user-oriented, price/performance design philosophy, it's the 619. It's as much

or as little as you need, whenever and however you need it.

Contact your Keithley representative. He'll be happy to show you how the 619 does exactly what you expect a sophisticated measurement instrument to do—and not do.

## KEITHLEY

Keithley Instruments, Inc.

28775 Aurora Road/Cleveland, Ohio 44139/(216) 248-0400/Telex: 98-5469

Keithley Instruments, GmbH

Heighofstrasse 5/D-8000 München 70/(089) 714-40-65/Telex: (841) 5212160

Keithley Instruments Ltd.

1, Boulton Road/GB-Reading, Berkshire RG2 0NL/(0734) 86-12-87/Telex: (851) 847047

Keithley Instruments, SARL

44, Rue Anatole France/F-91121 Palaiseau Cedex/(01) 014-22-06/Telex: (842) 204188

For more information, Circle No 193






# New Products




**PROM EMULATOR.** The ROSI ROM-simulation personality module allows program evaluation before ROM programming when used with the IM1010 PROM-programming system. The module features a 4k×8-bit RAM, which permits emulation of one to four PROMs and allows correspondence between PROM and RAM addresses. The module features standard RAM access time of 300 nsec; faster times are also available. \$595. **International Microsystems Inc.**, 11554 C Ave, Auburn, CA 95603. Phone (916) 885-7262. **Circle No 348**

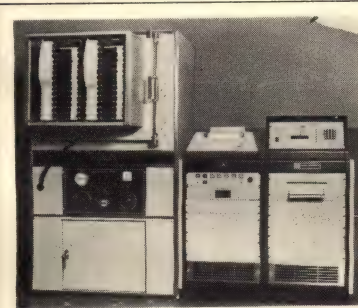

**RAM EVALUATOR.** System Super 20 (SS20) provides all power and stimulus requirements for evaluating 4k- to 64k-bit RAMs at burn-in temperatures. A self-checking  $\mu$ P-based monitoring system continually supervises the data inputs and outputs of each device under test and distinguishes hard failures and soft errors. All faults are identified by board, device and temperature and selectively displayed and printed out in real time at 300 baud. Four electrical sections permit simultaneous testing of four different RAM types. \$95,000. Delivery, 120 days ARO. **Marin Controls Co.**, 517 K Marine View Ave, Belmont, CA 94002. Phone (415) 591-8924. **Circle No 349**


**HIGH-VOLTAGE PULSER.** Model P-10 applies 6-kV square pulses to 50 $\Omega$  resistive or coaxial-cable loads. Suited for driving Pockel cells used in mode-locked laser systems, the unit features a throughput delay of 10 nsec (with a 5-nsec pulse width), input trigger response of 400 psec and an input-to-output jitter of  $\pm 250$  psec. \$3450. Options include pulse widths of 7 to 25 nsec (\$100), 5- to 60-nsec front-panel-adjustable throughput delay (\$375), 7-kV output (\$200) and HN output connector (\$100). Delivery, 90 days ARO. **Energy Research**, Box 3623, Simi Valley, CA 93063. Phone (805) 526-1143. **Circle No 350**

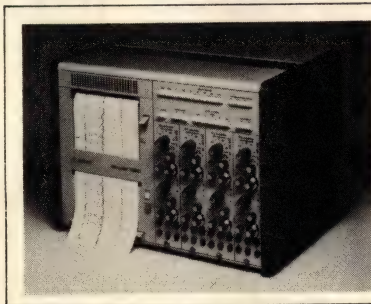

**THERMAL-ARRAY RECORDER.** No pens, ink or pen-motor linkages are used in Model TA600. It monitors 32 overlapping analog channels on a 6-in. chart, while the basic mainframe has space for four dual-signal conditioners. The unit features capability for full annotation of data-acquisition conditions and  $\mu$ P entry of user text messages; an optional  $\mu$ P allows remote-control operation. A thermal array composed of 512 thermal styli spaced 100 to the inch contributes to system accuracy of  $\pm 0.2\%$  FS. \$4650. **Gould Inc.**, 3631 Perkins Ave, Cleveland, OH 44114. Phone (216) 361-3315. **Circle No 351**

**LASER RADIATION ALARM.** Claimed to provide an audible indication of the presence of pulsed laser radiation above the level of eye safety, the 7.6×5.1×2.5-cm I-LID (instantaneous laser incidents detector) monitors pulsed energy from 1064-nm-wavelength lasers. The unit's normal threshold is set at 20 nJ/cm<sup>2</sup>; a press-to-operate switch provides recalibration to the claimed eye-damage threshold of 1  $\mu$ J/cm<sup>2</sup>. A built-in test laser permits device self-test. The 98g unit operates on a rechargeable battery and built-in solar-cell charger. \$375. **International Laser Systems Inc.**, 3404 N Orange Blossom Trail, Orlando, FL 32804. Phone (305) 295-4010. **Circle No 352**

**Berg's 0.025" PV™ interconnection system is available through these leading distributors:**

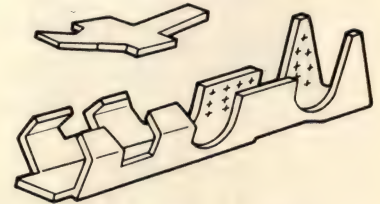

## ARIZONA

Phoenix  
Weatherford  
602-272-7144

## CALIFORNIA

Anaheim  
Weatherford  
714-634-9600  
Belmont  
LoDan  
415-592-4600  
Glendale  
Weatherford  
213-849-3451  
Inglewood  
Force Electronics  
213-776-1324  
Palo Alto  
Weatherford  
415-493-5373

San Diego  
Weatherford  
714-278-7400

## COLORADO

Englewood  
Weatherford  
303-770-9762

## CONNECTICUT

Norwalk  
Harvey  
203-853-1515

## FLORIDA

Orlando  
Hammond  
305-849-6060

## ILLINOIS

Arlington Heights  
LoDan  
312-398-5311

## INDIANA

Fort Wayne  
Fort Wayne Electronics  
219-423-3422

Indianapolis  
Graham  
317-634-8202

## KANSAS

Kansas City  
Tennant  
913-287-2100

## MARYLAND

Baltimore  
Resco/Baltimore  
301-823-0070

Beltville  
Resco/Washington  
301-937-9100

## MASSACHUSETTS

Lexington  
Harvey  
617-861-9200

## MINNESOTA

Minneapolis  
Aero Space  
Computer Supplies  
612-884-4725

## NEW JERSEY

Pinebrook  
Harvey  
201-227-1262

## NEW YORK

Binghamton  
Harvey  
607-748-8211  
Commack  
Conco Electronics  
516-543-8300  
W. Henrietta  
Harvey  
716-334-5920  
Woodbury  
Harvey  
516-921-8700

## NORTH CAROLINA

Greensboro  
Hammond  
919-275-6391

## OHIO

Cincinnati  
Graham  
513-772-1661  
Cleveland  
CAM/Ohio  
216-461-4700

## PENNSYLVANIA

Philadelphia  
Almo  
215-698-4000  
Pittsburgh  
CAM/RPC  
412-782-3770

## SOUTH CAROLINA

Greenville  
Hammond  
803-233-4121

## TEXAS

Austin  
CSI  
512-837-8922  
Dallas  
CSI  
214-357-6511

Houston  
CSI  
713-771-7237

## WASHINGTON

Seattle  
Weatherford  
206-575-1340





# Price Without Sacrifice.



## HITACHI V-302 & V-152

Put a proven Hitachi dual-trace oscilloscope on your bench for as little as \$695. Our V-152 15MHz model includes unprecedented sensitivity (1 mV/div.)...10X sweep magnification...front panel XY operation...trace rotation...Z-axis input...and more. Need greater bandwidth? Our V-302 model is the only 30MHz dual-trace scope with signal delay line priced under \$1000, with all the above features, to make your testing operations fast, easy, and accurate. Reliability is exceptional, too. (As you'd expect from a manufacturer with over 20 years of experience "outscoping" the competition.) So exceptional, in fact, that Hitachi quality is backed by a 2-year warranty...the longest in the industry. Whether you use it for teaching or repairs, for video, audio, or computer testing, you can't find more scope for your dollar than at Hitachi. Write for more details.

## Hitachi...The measure of quality.

- V-152 15 MHz Dual Trace . . . \$695\*
- V-302 30 MHz Dual Trace . . . \$945\*

\*Probes included.



**HITACHI**

Hitachi Denshi America, Ltd.  
175 Crossways Park West  
Woodbury, NY 11797  
(516) 921-7200

For more information, Circle No 194

## DOSC Introduces

SEE US AT NCC Booth #3419

# THE MOST POWERFUL MICROCOMPUTER AVAILABLE TODAY!

48K RAM (64K optional)  
with sockets available for  
up to 16K PROM

Strobed or Scanned  
Keyboard Interface

Serial I/O Port

Intel Multibus™ Compatibility



**TCB-85/  
Total Computer Board**

Dual-Density/Double-Sided  
Floppy Disk Controller

Programmable CRT Controller

Parallel Printer Interface

Programmable Interrupt Controller

## One Board Does It All . . .

Complete as a stand-alone or used with Intel's Multibus™, the TCB-85 combines outstanding performance and reliability with an impressive variety of features. . .all in one compact, low priced package.

In addition to an extremely powerful I/O capability and high level of integration, the TCB-85 is capable of supporting CP/M and PASCAL with DOSC PROMs.

The TCB-85 uses the Intel 8085A CPU and can optionally be ordered with the Intel 8085A-2/10 MHz CPU.

™ Trademark Intel Corporation

For more information, Circle No 195

Evaluation units are now available for immediate delivery and priced at just \$1275 in quantities of 100.

## Get All the Details Now!

Contact Alex Newman at (516) 621-6640

**DOSC**

OEM PRODUCTS DIVISION

175 I.U. Willets Road, Albertson, NY 11507





## To sell the best terminal, buy the best keyboard.

The keyboard is one of the most critical components in your computer system. Which is why the first thing to consider when you buy a keyboard is reliability.

That alone is probably good enough reason to specify a Hall effect solid state keyboard from MICRO SWITCH. It's the most reliable keyboard you can buy. From the beginning, it will help you and your customers save money on repairs.

As a result of design innovations, the Hall effect keyboard is competitively priced against lower-performance, less reliable keyboards. Innovations like the microcomputer that gave you the first "intelligent" keyboard, the three terminal keyswitch module and single-sided printed circuit boards.

In addition, there's our Value Engineering Program.

With specialists who work with you early in the design of your product, to give you the best, most effective keyboard for terminals used in high throughput applications like word processing, batch data entry, and photocomposition.

And only our keyboards are backed by a dedicated field engineering organization, and an experienced application engineering team. To make sure you have the most cost effective keyboard for the job.

That's really what buying a keyboard should be about.

And why it pays to buy a Hall effect keyboard from MICRO SWITCH, the most reliable keyboard you can buy.

For details, write MICRO SWITCH, Freeport, Illinois 61032. Or call 815-235-6600. In Germany, write Honeywell GMBH, Kaiserleistrasse 55, 6050 Offenbach/Main West Germany. **Circle 30 for data**

Visit us at Electro '80 Booth #2151-57

**MICRO SWITCH**  
a Honeywell Division



# Some people think the best feature of our Digibridges<sup>®</sup> is price. Others think performance.

## We couldn't agree more.

One of the biggest problems in choosing an RLC tester is finding the right unit. With the right features. At the right price.

At GenRad, we give you all the choices you need. Four different Digibridges in four different price ranges. No matter what your level of testing, one of them will fit your needs precisely. With the performance you need. And the accuracy you want.

Yet the Digibridge family is economically priced. Because you don't pay for performance you don't need.

So take a look at the Digibridge family from GenRad. You'll find everything you want. At a price you can afford.

For more information, call toll-free 1-800-225-7335. In Massachusetts, 1-617-779-2825. Or write GenRad, Concord, MA 01742.



### 1657 RLC Digibridge

Our 1657 Digibridge gives you everything you need for basic RLC testing at a modest \$1500. It's accurate to 0.2%, and lets you test at 1 kHz as well as 120 or 100 Hz. The 1657 gives you continuous measurements at 3 per second and the choice of series or parallel measurement modes.



### 1658 RLC Digibridge

For more critical measurements, our 1658 gives you the measurement accuracy of 0.1% at 1 kHz and 120 or 100 Hz. Its features include automatic limit comparison capability and selectable test speeds for fast error free measurements. Range selection is automatic and the 1658 has external DC bias capability, too. All for just \$3,200. As an option an IEEE bus/handler package for data communication and high speed automated testing is available.



### 1687 1 MHz LC Digibridge

In a 1 MHz tester our 1687 gives you 0.1% accuracy on C measurements, 0.2% accuracy on L measurements. You get most of the features of our 1658: automatic range selection, selectable measurement speeds, automatic limit comparison capability, external DC bias capability, and more. Like self-check diagnostics. At a cost of just \$4000. Optionally, you can also get an IEEE bus/handler interface, external fixturing and a 1.0V rms test voltage.



### 1688 Precision LC Digibridge

Our top of the line 1688 provides basic accuracy of 0.02%, a choice of 254 frequencies from 240 Hz to 20 kHz, and a 1 PPM D measurement resolution. Test speeds can be set at .5, 1.5, 3.0 or 7.0 measurements per second and test voltages at .25V or 1.0V. Of course range selection, limit comparison capability and self-check diagnostics are also included. And that's the most performance you can buy for \$4900.



## GenRad

Put our leadership to the test.

For more information, Circle No 196

(Prices shown are U.S.A. list.)





The only part better is our service.

For a test jack catalog and distributor list, write E. F. Johnson Co., Waseca, MN 56093.  
If you don't find it there, we'll custom design it for you. Just call 507-835-6222.



**JOHNSON**

Your Test Jack Source.

*For more information, Circle No 197*



# These Headers can be headed your way today.



Need headers for connector systems, PCB's or wire wrapping? Your A P Distributor has them in stock and ready for delivery.

Female headers come in single or double rows of 36 contacts.

Male headers come in straight or right angle configurations in single or double rows of 36 contacts. All can be cut to any number of contacts by you or your A P Distributor.

- Dielectric is black thermoplastic polyester and unaffected by flow soldering or board cleaning solvents.
- Contacts are full hard-copper alloy 770. Gold plated or unplated.

## Immediate delivery!

Call one of the distributors below and give him your requirements. He'll fill them "faster and easier" than anyone else. And you'll find his prices "easy", too.

For more information call TOLL FREE: 800-321-9668

Arvada, CO (303) 423-9670  
Bensenville, IL (312) 595-6622  
Bohemia, NY (516) 567-4200  
Buffalo, NY (716) 884-3450  
Burlingame, CA (415) 348-0483  
Canoga Park, CA (213) 999-5001  
Chicago, IL (312) 638-4411  
Cleveland, OH (216) 587-3600  
Dallas, TX (214) 233-0020  
Dallas, TX (214) 233-5200  
Dayton, OH (513) 236-9900  
Dayton, OH (513) 236-8088  
Denver, CO (303) 534-6121  
Elmhurst, IL (312) 279-1000  
Farmingdale, L.I., NY (516) 293-4141  
Houston, TX (713) 777-0358  
Hudson, NH (603) 882-1133  
Irvine, CA (213) 443-3724  
Irvine, CA (213) 637-0839  
King of Prussia, PA (215) 337-3330  
Mamaroneck, NY (914) 698-9332  
Milwaukee, WI (414) 475-6000  
Natick, MA (617) 879-0860  
Newton, MA (617) 969-8900  
Newton, MA (617) 965-5115  
Newton Upper Falls, MA (617) 964-6200

Norwalk, CT (203) 853-2011  
Orlando, FL (305) 859-1620  
Philadelphia, PA (215) 698-4000  
Phoenix, AZ (602) 279-9446  
Plymouth, MN (612) 559-2211  
Rosemont, IL (312) 298-4210  
San Diego, CA (714) 560-0515  
San Diego, CA (714) 278-6350  
San Jose, CA (408) 946-4300  
Springfield, NJ (201) 376-8900  
Sunnyvale, CA (408) 734-5470  
Sunnyvale, CA (408) 732-1100  
Sun Valley, CA (213) 768-3800  
Tempe, AZ (602) 968-6181  
Tukwila, WA (206) 575-3120  
Wallingford, CT (203) 265-7738  
Wilmington, MA (617) 657-4310



**A P PRODUCTS  
INCORPORATED**

1359 W. Jackson St.  
Painesville, Ohio • 44077  
Phone: (216) 354-2101


In Europe, contact A P Products GmbH  
Baumlesweg 21 • D-7031 Weil 1 • W. Germany  
Phone: (07157) 62424 • TLX: 841 07 23384

## Faster and Easier is what we're all about.

For more information, Circle No 198

## New Products


### COMPONENTS & PACKAGING

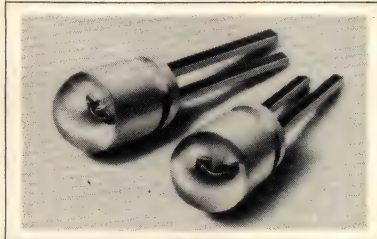

**LED LAMPS.** Units in the subminiature Illuminator Series (MK9150/MK9350) employ high-efficiency gallium-phosphide semiconductor technology to produce a luminous output of 45 to 80 mcd. The monochromatic devices, capable of up to 0.5W operation, are available initially in orange and yellow with green to follow; the orange lamp can be filtered to produce high-efficiency red.


Resistant to shock and vibration, each lamp comprises two LED chips wired internally in series and mounted in a 1-piece injection-molded T-1 $\frac{1}{4}$  package with built-in lens and molded light reflector.

When operated under normal conditions, the units have a useful life of 100,000 to 1 million hrs. Approximately \$1.20 (small qty). **General Instrument Optoelectronics**, 3400 Hillview Ave, Palo Alto, CA 94304. Phone (415) 493-0400. **Circle No 280**

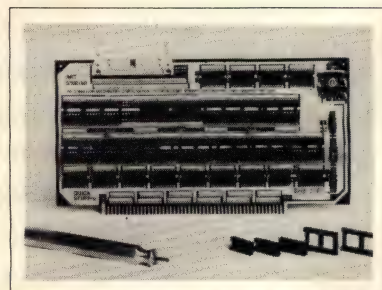

**PROTOTYPING BOARD.** For S-100-bus systems, the reusable S100/50 comes with a wiring tool and consists of a pc board with a 64-pin I/O area, gold edge connector, an assortment of DIP sockets, 5V regulator, heat sink and capacitors. Insulation-displacement connectors are used to ease circuit changes: 30-gauge Kynar insulated wire is pushed into the contacts, piercing the insulation and forming a gas-tight connection. The unit accommodates all widely used 2- to 64-pin DIPs and discretes. From \$127. **Information Machinery Corp**, 110 Middlesex St, Chelmsford, MA 01863. Phone (617) 251-3270. **Circle No 281**



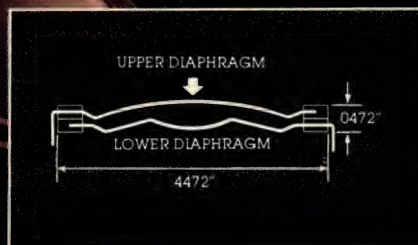

**The assignment: offer a reliable switch element capable of evolving into a variety of specialized key- and rocker switch designs.**

**The result: ITT Schadow's Disc Switch.**

At ITT Schadow, we specialize in taking basic switch designs and changing them to fit your specific applications. We've built a reputation on our awareness that the first two syllables of "customer" are "custom."

Customized adaptations work best when they're based on products with a proven record of reliability. Our popular Disc Switch is a case in point. When depressed, its upper dome-shaped diaphragm flattens to make positive contact with a lower diaphragm over a broad circular con-

tact area. This simple, sturdy design has a rated service life of up to 10,000,000 cycles. Schadow's Disc Switch is available as a basic switch element, in a variety of standard packages as shown, and in custom packages. You can choose

from a selection of colors and graphics.

Over the past two decades, we've made millions of pushbutton, key-, rocker, and rotary switches for some of America's largest consumer and industrial OEM's. We are your "creative

switchmaker" with the ability to design, adapt, and manufacture switches for nearly every requirement.

Your ITT Schadow manufacturer's representative or distributor can tell you more. Or contact ITT Schadow Inc., a subsidiary of International Telephone and Telegraph, 8081 Wallace Road, Eden Prairie, MN 55344. Phone 612/934-4400, TWX 910-576-2469, Telex 29-0556.



**ITT Schadow**

For more information, Circle No 199





# If Ben Experimented Today, He Could Rent Any One Of 18,000 Test Instruments From General Electric.

Short of a kite and a key, a broad selection of the most wanted test instruments is available—like lightning!—from a GE Rental Shop near you. Biddle Megger Testers. Hewlett-Packard Signal Generators. Honeywell Oscillographs and Plug-in Amplifiers. Scopes from Tektronix. Recorders from Gould Brush and Esterline Angus...and many more. So, whether you need a single scope, specialized instrumentation, a complex measurement system or application assistance, renting from GE is a breeze!



All rental instruments are maintained in tip-top shape, thoroughly checked and calibrated before each shipment. And it's on the way to you fast, normally the same day you call.

For your FREE RENTAL CATALOG call collect to the inventory center nearest you; ☐ Los Angeles, CA (213) 642-5350 ☐ Atlanta,

GA (404) 457-5563 ☐ Chicago, IL (312) 854-2994 ☐ Detroit, MI (313) 285-6700 ☐ Schenectady, NY (518) 385-2195 ☐ New York City (201) 227-7900 ☐ Houston, TX (713) 672-3570. Or call (518) 327-9900.


For more information, Circle No 201

GENERAL ELECTRIC COMPANY  
Apparatus Service Division  
Building 4, Room 210, 1 River Road  
Schenectady, NY 12345

GENERAL  ELECTRIC



## New Products

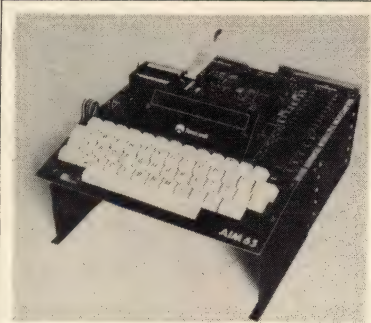

**CARD FILE.** The K-1005-A integrates the Aim-65 computer, a keyboard and a series of expansion boards into one compact, portable unit complete with mother board. Drawing no power, the unbuffered mother board utilizes the Aim bus structure to carry expansion-connector signals to up to four additional boards; a fifth undedicated position is provided for a board not on the bus. To reduce noise, the mother board is a double-sided pc board with ground plane. An applications mother board (K-1005-3-AP) is optional. \$95; K-1005-3-AP, \$29. **Micro Technology Unlimited**, Box 4596, Manchester, NH 03108. Phone (603) 627-1464. **Circle No 282**

**OSCILLATOR.** Model P-453 L-C voltage-controlled unit is available at any frequency in the 100- to 400-MHz range. Frequency deviation ranges to  $\pm 10\%$  with a  $\pm 5V$  dc control voltage; the control voltage can be modulated at a rate up to 1% of the output frequency. Output power equals +10 dBm into 50 $\Omega$ . Single-sideband phase noise in a 1-Hz bandwidth equals -60 dB at 300 Hz, -81 dB at 1 kHz, -108 dB at 10 kHz and -142 dB at 500 kHz. \$420 (10). **Greenray Industries Inc.**, 840 W Church Rd, Mechanicsburg, PA 17055. Phone (717) 766-0223. **Circle No 283**

**OSCILLATOR.** Featuring current requirements as low as 50  $\mu A$  and suitable for battery-powered products requiring a 10- to 250-kHz time base, Model LQXO-4 is a self-contained hermetically sealed, hybrid quartz crystal oscillator consisting of a Statek tuning-fork crystal, CMOS amplifier and capacitors and resistors mounted on a thin-film substrate. The unit is available in eight stock frequencies, has an operating-temperature range of -55 to +125°C, withstands shock to 1000g and provides accuracy to  $\pm 0.01\%$  ( $\pm 0.02\%$  typ). \$12.50 (1k). **Statek Corp.**, 512 N Main, Orange, CA 92668. Phone (714) 639-7810. **Circle No 284**

# READY NOW

## Quick-rental instruments catalog



GENERAL  ELECTRIC

## The General Electric Test Instrument Rental Catalog!

- It's all-new and it's free.
- Over 18,000 test or measurement instruments from leading manufacturers in stock.
- From accelerometers to X-Y recorders.
- All calibrated to manufacturers' specs and ready for fast delivery.
- Call or write for your FREE copy now!

GENERAL ELECTRIC COMPANY  
APPARATUS SERVICE DIVISION  
BUILDING 4, ROOM 210  
SCHENECTADY, N.Y. 12345  
(518) 372-9900

GENERAL  ELECTRIC

For more information, Circle No 202



## New Products

**CRYSTAL CLOCK** oscillators in the BW9101 Series utilize hybrid-circuit packaging techniques and cover the frequency range of 250 kHz to 50 MHz. Having a height of 0.2 in. and occupying 0.815×0.515 in. on a circuit board, the hermetically sealed units operate from a 5V supply, are TTL compatible and provide frequency stability of ±0.01% over the specified operating range. They are also claimed solvent resistant and

leak tested to MIL-STD-883A. \$6 (10k). **Bulova Watch Co Inc**, 61-20 Woodside Ave, Woodside, NY 11377. Phone (212) 335-6000. **Circle No 285**

**MOMENTARY PUSHBUTTONS.** MSPF Series units sport an exceptionally large button and a full-threaded, 1 $\frac{5}{32}$ -in. body that suits front- or rear-panel mounting. The devices feature a contact self-leveling capability to furnish minimum



contact resistance and come with a choice of standard red, white, blue, black or custom-colored buttons. Available as normally open, normally closed or normally open/normally closed devices, all units have epoxy seals to reduce contamination during soldering. \$0.99 (250) for normally open unit. **Alco Electronic Products Inc**, 1551 Osgood St, North Andover, MA 01845. Phone (617) 685-4371. **Circle No 286**




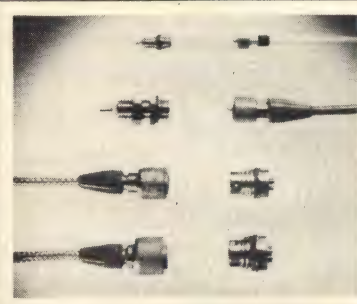
*The advanced  
avionics connector*

### **THE ARINC 600 NOW FROM SOURIAU**

SOURIAU's S600 Series is designed to meet the stringent requirements of the next generation of digital electronic equipment. Manufactured in accordance with Specification ARINC 600, SOURIAU's S600 Series features low insertion force, high resistance to random vibrations (white noise), and high contact

density. Available in the three shell sizes outlined by ARINC 600, SOURIAU's S600 Series Connectors feature size #22 contacts in layouts of 120, 300 and 600 contacts, together with power, coaxial, fiber-optic and fluidic contacts. Signal contacts are rear-removable crimp, P.C. terminal or wire-wrap.

 **SOURIAU, INC**  
7765 KESTER AVE.  
VAN NUYS, CA 91405  
(213) 787-5341 • TWX 910-495-2028



**ULTRAMIN CONNECTORS.** Featuring simplified assembly, these coaxial connectors come in ultraminiature and miniature sizes with outer diameters of 1/8 and 1/4 in., respectively. Overall plug length is <0.25 in. Bodies and pins are gold-plated brass; the sockets, gold-plated beryllium-copper; the insulators, TFE Teflon. From \$0.95 (1k). **Microtech Inc**, 1420 Conchester Hwy, Boothwyn, PA 19061. Phone (215) 459-3566.

**Circle No 287**

**STRIPLINE HYBRIDS.** Constituting a line of 90° quadrature hybrids covering 200 to 18,000 MHz, H Series units are specified in the standard full-octave bands. Typical specs for Model 7012 include frequency range of 7 to 12 GHz, isolation of 20 dB min, insertion loss of 0.5 dB max, maximum VSWR of 1.35, phase balance of ±3° and amplitude balance of ±0.3 dB. All units come with sealed SMA steel connectors and captivated center conductors. \$95; except Model H1218 (12 to 18 GHz), \$125. **Engelmann Microwave Co**, Skyline Dr, Montville, NJ 07045. Phone (201) 334-5700. **Circle No 288**




# LAMBDA INTRODUCES LOW-COST SWITCHING POWER SUPPLIES

**1/3 the weight, 60% the size, twice the efficiency AND THE SAME PRICE AS LOW-COST LINEARS.**

**Compare these specifications & cost**



**LUS-8-5,  
5V @ 3A,  
\$46.**

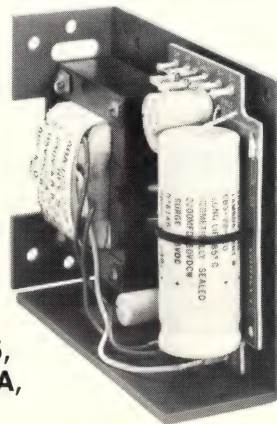

**LOS-Z-5,  
5V @ 3A,  
\$46.**

## LU SERIES SWITCHING

## LO SERIES LINEAR

LU Series	Description	LO Series
LUS-8-5	Model	LOS-Z-5
5V $\pm$ 5%	Output Voltage	5V $\pm$ 5%
3A	Current	3A
3.82 x 1.38 x 3.54	Size	4 $\frac{7}{8}$ x 4 x 1 $\frac{5}{8}$
.62 lbs.	Weight	2 lbs.
62%	Efficiency (Min)	25%
.803	Watts/cubic inch	.473
0.85%	Regulation	0.15%
120mV p-p	Ripple	5mV p-p
available as accessory	OV	available as accessory
\$46	Price	\$46
90 days	Guarantee	90 days

## Lambda staffed sales and service offices

**ATLANTIC REGION**  
Melville, New York 11747  
515 Broad Hollow Road  
Tel. 516-694-4200  
TWX: 510-224-6484

**NORTH-EASTERN REGION**  
Lexington, Massachusetts 02173  
2 Militia Drive  
Tel. 800-645-9420  
TWX: 710-326-7558

**EAST-CENTRAL REGION**  
Lexington, Massachusetts 02173  
2 Militia Drive  
Tel. 800-645-9420  
TWX: 710-326-7558

**MID-WESTERN REGION**  
Arlington Heights, Ill. 60005  
2420 East Oakton St., Unit Q  
Tel. 800-645-9032  
TWX: 910-222-2856

**FAR-WESTERN REGION**  
Cerritos, Ca 90701  
12607 Hidden Creek Way Suite J  
Tel. 213-926-0562  
TWX: 910-346-7649

**SOUTH-WESTERN REGION**  
Dallas, Texas 75231  
6950 Winchester  
Tel. 214-341-5130  
TWX: 910-861-9048

**NORTH-WESTERN REGION**  
Sunnyvale, Ca 94086  
599 N. Mathilda Ave.  
Tel. 408-738-2541  
TWX: 910-339-9243

**CANADA**  
Veeco Lambda Ltd.  
100C Hymus Blvd.  
Pointe-Claire, Quebec-H9R 1E4  
Tel. 514-697-6520  
TWX: 610-422-3029

Veeco Lambda Ltd.  
P.O. Box 501, Postal Station K  
Toronto, Ont. M4P 2G9  
Tel. 416-486-0794  
TWX: 610-422-3029

 **LAMBDA  
ELECTRONICS**  
DIVISION of  INSTRUMENTS INC.



# LU SERIES

## SPECIFICATIONS

### DC Output

Voltage range shown in tables opposite page.

### Regulated Voltage

regulation, line .....0.4%  
regulation, load .....0.85%  
ripple and noise .....120mV p-p for 5V models,  
150mV p-p for 12V and 15V  
models, 200mV p-p for 24V  
models  
temperature coefficient ..0.02%/°C

### AC Input

line .....105 to 132 VAC, 47-440 Hz  
efficiency minimum .....62% for LUS-8 models, 66%  
for LUS-9 models, 72% for  
LUS-10 models

**DC Input** ..... 130-160 VDC.

### Overshoot

No overshoot at turn-on, turn-off or power failure

### Ambient Operating Temperature

Continuous duty 0° to 50°C with suitable derating shown  
in table on opposite page.

### Storage Temperature

-30°C to +85°C

### Overload Protection

External overload protection, automatic factory preset  
electronic current limiting circuit limits the output current  
thereby providing protection for the load as well as the  
power supply. Internal failure protection provided by fuse.

### Overvoltage Protection

Overvoltage protection is standard on LUS-9 and  
LUS-10 models. For other models see accessory pages  
in catalog.

### Cooling

Convection cooled, no fans or blowers needed.

### DC Output Controls

Simple screwdriver voltage adjustment over the entire  
voltage range.

### Mounting

One mounting surface, one mounting position.

### Input and Output Connections

Heavy duty terminal block on front of chassis.

### Physical Data

Package Model	Weight (lbs.)		Size Inches
	Net	Ship	
LUS-8	0.62	0.75	3.82 x 1.38 x 3.54
LUS-9	0.78	1.00	3.82 x 1.38 x 4.53
LUS-10	1.04	1.25	3.82 x 1.46 x 6.02

### Finish

Gray, Fed. Std. 595, No. 26081.

### Accessories

Overvoltage protectors available see catalog. (Built-in  
LUS-9, LUS-10 models.)

### Guarantee


90 days guarantee includes labor as well as parts. Guarantees  
applies to operation at full published specifications at  
end of 90 days.



Designed for listing in Underwriter's Laboratories  
recognized component index.



# NOW SWITCHING POWER SUPPLIES AT AN INCREDIBLY LOW PRICE THE NEW LU SERIES

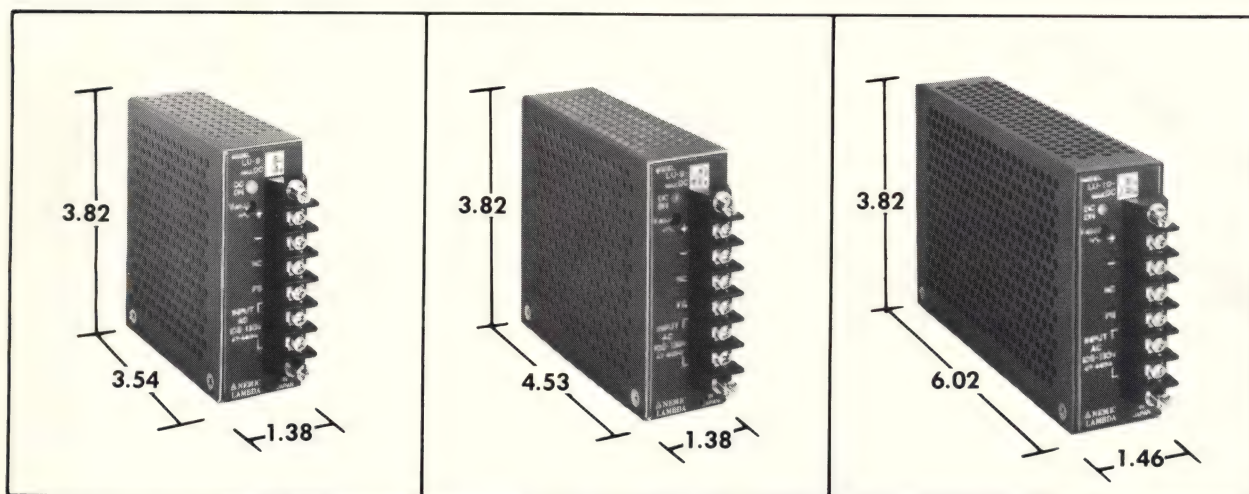

**LU-8 PACKAGE  
UP TO 24V  
UP TO 3A**

**LU-9 PACKAGE  
UP TO 24V  
UP TO 5A**

**LU-10 PACKAGE  
UP TO 24V  
UP TO 10A**

## VOLTAGE AND CURRENT RATINGS

MODEL	REGULATION (LINE, LOAD)	RIPPLE (mV p-p)	MAX CURRENT (AMPS AT)		PKG SIZE	DIMENSIONS (INCHES)	PRICE
			40°C	50°C			
<b>5V <math>\pm 5\%</math> ADJ.</b>							
LUS-8-5	0.4%, 0.85%	120	3.0	2.1	8	3.82 x 1.38 x 3.54	\$46
LUS-9-5	0.4%, 0.85%	120	5.0	3.5	9	3.82 x 1.38 x 4.53	70
LUS-10-5	0.4%, 0.85%	120	10.0	7.0	10	3.82 x 1.46 x 6.02	95
<b>12V <math>\pm 5\%</math> ADJ.</b>							
LUS-8-12	0.4%, 0.85%	150	1.3	0.9	8	3.82 x 1.38 x 3.54	\$46
LUS-9-12	0.4%, 0.85%	150	2.1	1.5	9	3.82 x 1.38 x 4.53	70
LUS-10-12	0.4%, 0.85%	150	4.2	2.9	10	3.82 x 1.46 x 6.02	95
<b>15V <math>\pm 5\%</math> ADJ.</b>							
LUS-8-15	0.4%, 0.85%	150	1.0	0.7	8	3.82 x 1.38 x 3.54	\$46
LUS-9-15	0.4%, 0.85%	150	1.7	1.2	9	3.82 x 1.38 x 4.53	70
LUS-10-15	0.4%, 0.85%	150	3.4	2.4	10	3.82 x 1.46 x 6.02	95
<b>24V <math>\pm 5\%</math> ADJ.</b>							
LUS-8-24	0.4%, 0.85%	200	0.6	0.4	8	3.82 x 1.38 x 3.54	\$46
LUS-9-24	0.4%, 0.85%	200	1.0	0.7	9	3.82 x 1.38 x 4.53	70
LUS-10-24	0.4%, 0.85%	200	2.1	1.5	10	3.82 x 1.46 x 6.02	95



# WHAT THIS COUNTRY NEEDS IS A GOOD \$46. SWITCHING POWER SUPPLY.\*



Merrill Simon  
Vice-President of Marketing  
Lambda Electronics

## AND NOW LAMBDA HAS IT!

THE NEW LU SERIES, UP TO 24V, UP TO 10 AMPS

\*LUS-8-5, 5V, 3A—\$46.

 **LAMBDA ELECTRONICS**



## New Products



**CODE SWITCHES.** Capable of retrofitting many popular thumbwheel switches, DPS 8, -9 and -10 Series bidirectional units come with decimal, BCD and BCD-complement codes, have readout characters up to 60% larger than similar thumbwheel types and are designed for mounting from front of the panel. The 0.315-in. (-8 and -9 models) and 0.394-in.-wide (-10) devices snap together to form groups of any size. Heavy gold-clad contacts improve reliability. Model DPS 9-131-AK (BCD code), \$2.96 (100). **Alco Electronic Products Inc.**, 1551 Osgood St, North Andover, MA 01845. Phone (617) 685-4371. **Circle No 289**

**CONDUCTIVE-INK CONNECTOR.** A compact, low-profile UL 94V-0 rated termination for conductive-ink circuitry, Flexlok CIC 1-piece unit uses a contact shape designed to minimize abrasion of the ink during extraction and insertion. It provides gas-tight high-pressure interconnections, claimed as reliable as gold-plated systems but at a lower cost. The connector is supplied with contacts assembled and comes in two versions: with 90° approach angle (side entry) or with perpendicular attitude (top entry). Six to 21 traces on 0.1-in. centers and conductive-ink-circuitry thickness of 0.006 to 0.02 in. can be accommodated. **Burndy Corp.**, Norwalk, CT 06852. Phone (203) 838-4444. **Circle No 290**


**RESISTOR NETWORKS.** Type T912 precision networks are constructed with Tetrinox resistance films that provide ratio tolerances from  $\pm 0.1$  to  $\pm 0.01\%$ , ratio TCs of either 10, 5 or 2 ppm/°C and ratio stability of resistance at full load (2000 hrs) within  $\pm 0.01\%$ . Available in 12 standard models with two equal-resistance values from 5000 $\Omega$  to 1 M $\Omega$ , the thin-profile units have standard lead spacings of 0.1 in. \$1.35 (1k) for standard, 10,000 $\Omega$ , 0.1%-tolerance and 10-ppm/°C TC tracking unit. Delivery, stock to 6 wks. **Caddock Electronics Inc.**, 3127 Chicago Ave, Riverside, CA 92507. Phone (714) 683-5361.

**Circle No 291**

## Measure pulsed and CW electric fields accurately, easily and economically

The EFS-2 E-Field Sensor measures electric fields from 1 to 300 volts/meter, pulse or CW, in a frequency range of 10KHz to 220 MHz. A companion model, the EFS-3 also offers monopulse capability; the EFS-3 can operate on a single pulse as narrow as 1 usec. No tuning or bandswitching is required. Self-contained and powered by rechargeable batteries, the unit is physically small, thus has only negligible effect on the field. Accessories are available for remote readout or control, including fiber

optic data link. Write for complete data on the EFS-2 and EFS-3. These low cost instruments offer maximum versatility and accuracy for measuring and monitoring electric fields.

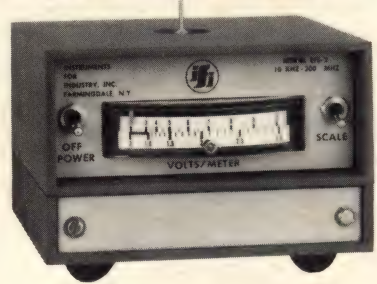

**instruments for industry, inc.**

151 Toledo Street • Farmingdale, N.Y. 11735  
516-694-1414 Cable: Electronic Hallandale, Fla. Telex: 51-43-32

For more information, Circle No 204



**the best way to solve your electronic wire problems...**

- over 8,000 different electronic wire and cable products, including instrumentation and tubing
- delivered from stock • cut to length
- from nearby warehouses throughout the world
- manufacturing capabilities for all industrial and military specs
- 50 years of knowledge and experience

Phone today for Manhattan Cable's latest catalog it belongs on your desk!

**50th ANNIVERSARY**

**Manhattan**

ELECTRIC CABLE CORP.

**NEW JERSEY**  
(201) 779-8900  
(800) 631-3528

**NEW YORK**  
(800) 631-3528

**SAN FRANCISCO**  
(415) 697-7016

**LOS ANGELES**  
(213) 685-5500  
(800) 423-4040

**CLEVELAND**  
(216) 749-7500  
(800) 362-2915

**HOUSTON**  
(713) 868-2222  
(800) 392-4948

**ATLANTA**  
(404) 346-1100  
(800) 241-8620

**CHICAGO**  
(312) 344-5040  
(800) 323-9022

For more information, Circle No 205



# Some memories don't need surge protection

Your computer has a memory that does. If surge gets through to the data bank, memories are altered and pc boards are charred causing havoc throughout your system. The TII-428 Surge Protector is the most effective and easiest to install 115 vac powerline



protection available. It combines a superfast varistor with a power-hungry 3-electrode gas tube backed up with a fuse for triple-protection. If a surge ever attacks your memory, the TII-428 will make sure there's no downtime or lost data. That's the TII-428. Remember it.



For free brochure and test data, please call or write:

**TII SALES OFFICE:**  
**INDUSTRIES, INC.**  
100 NORTH STRONG AVENUE  
LINDENHURST, N.Y. 11757  
(516) 842-5000 TELEX: 14-4631

For more information, Circle No 206

**NOW!**  
Compatible with IEEE 488 Bus!



## Phasemetrics. The Better Way!

When searching for the best way to measure anything, think first in terms of the "fundamental parameters": Voltage, Current, Frequency and Phase. For the highest accuracy phase meters, think of the Dranetz Series 305. It's the easiest and the best way to make bandwidth, immittance, Q, power factor and many more measurements. Write for your Applications Handbook.

**DRANETZ**


**DRANETZ ENGINEERING LABORATORIES, INCORPORATED**

2385 South Clinton Ave., South Plainfield, N.J. 07080 • (201) 755-7080, TWX 710-997-9553

For literature, Circle no 37

For demonstration, Circle no 38

## IC's, LED's, TRANSISTORS, RELAYS SOCKETS & MOUNTING DEVICES

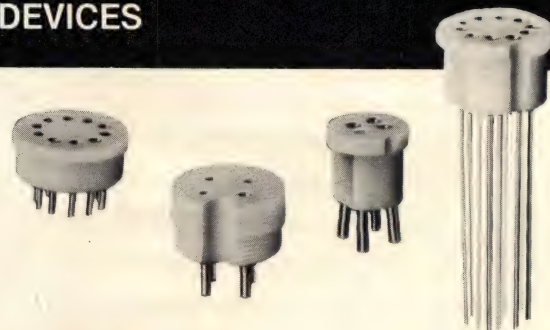

The most complete line in the industry featuring Teflon insulators, high retention precision contacts for excellent electrical, noise and mechanical characteristics. No loose hardware. Units available for interference fit into chamfered chassis holes, or quarter-turn "D" hole mounting for positive locking action. Send for latest catalog to . . .



**SEALECTRO CORPORATION**  
MAMARONECK, N.Y. 10543  
PHONE: 914 698-5600 TWX: 710-566-1110

Sealectro West:  
14011 Ventura Blvd., Suite 215, Sherman Oaks, Ca. 91423; (213) 990-8131  
1901 Old Middlefield Way, Suite 19, Mountain View, Ca. 94043; (415) 965-1212

Sealectro Ltd.: Portsmouth, Hants, England  
Sealectro S.A.: Zone Industrielle Toulon Est, 83067 Toulon Cedex, France

CIRCUIT COMPONENTS ■ R.F. COMPONENTS ■ PROGRAMMING DEVICES

For more information, Circle No 207

EDN APRIL 20, 1980



# FAIRCHILD

A Schlumberger Company



## The solid state CCD imaging leader.

If you serve the industrial inspection market or have a need in your own operation for automated industrial inspection, look to the technology leader in CCD image sensing. Fairchild.

We make CCD image sensors and camera subsystems with the precise geometric accuracy and high-speed capabilities needed for non-contact measurement. And we've been making them for a decade.

Contact CCD Imaging, Fairchild Advanced Technology Group, 4001 Miranda Avenue, Palo Alto, California 94304. Telephone: (415) 493-8001. TWX: 910-373-1227.




# No one has a better image in industrial inspection.

For more information, Circle No 397





# sonimagl8

XVIII INTERNATIONAL IMAGE, SOUND AND ELECTRONICS SHOW

## TO SEE AND HEAR

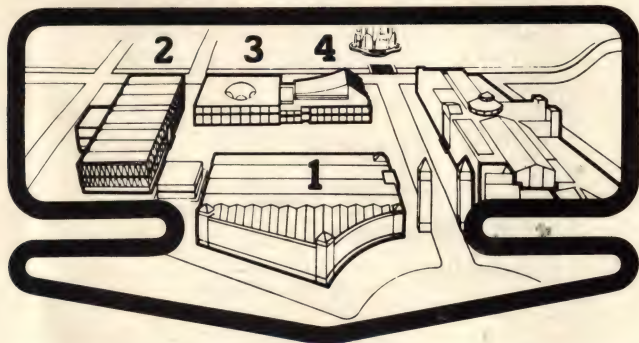

### 4 LARGE EXHIBITION PALACES DEALING WITH

- |  |   |
|--|---|
| <p><b>1</b>  Manufacturers of T.V., Radio, Hi-Fi Recording and play back equipment.</p> <p><b>3</b>  Hi-fi, Sound and Vision, Recording, Musical Instruments and Spectacular lighting systems.</p> | <p><b>2</b>  Components, Production Systems, Materials, Control Instruments, Security Systems, Communications (Professional, Radio hams).</p> <p><b>4</b>  Symposiums, Conventions, Meetings. Hi-Fi and Video demonstrations.</p> |
|--|---|

FAIR GROUNDS: BARCELONA (SPAIN) 29th september, 5th october, 1980  
Trade visitors: 29th, 30th september and 1st october - General Public: 2nd, 3rd, 4th and 5th october  
INFORMATION: Avda. M.<sup>a</sup> Cristina, s/n. - BARCELONA-4 (Spain) Tel. 223 31 01  
Telex 50458 FOIMB-E

For more information, Circle No 254

EDN APRIL 20, 1980

# No. 1 In Its Field



## Magnetic Shielding by Eagle

CUSTOM SHIELDS • STANDARD SHIELDS • FINISHING  
• DESIGN ENGINEERING • FOIL • HEAT TREATING  
• SHEET • TESTING • CONSULTING • FABRICATION

Eagle can help improve your product, and lower costs, by designing the right shield for you. Take advantage of Eagle's vast background in shield design and production.

Choose from a wide selection of sheet and foil, so you can form your own shields. For helpful design and cost data, write or call. Offices worldwide.



P.O. BOX 24283 • INDIANAPOLIS, INDIANA, 46224 • PHONE (317)297-1030

For more information, Circle No 253





# Volume EPROM Erasing Under 7 Minutes!

Ultra-Violet Products' C-91 MEMORASE® EPROM Erasing System completely erases up to 96 chips in less than 7 minutes.


The 10" x 10" grid allows erasures on the board. Chips are protected from electrostatic build-up by special conductive foam liners.

Erase up to 600 chips with UVP's C-90 MEMORASE® EPROM Erasing system.

Removable trays are available.

Each MEMORASE® System is quality built and backed by nearly 50 years of UV experience and technology.


*Applications Problem? Call Ron Cooper.*

**ULTRA-VIOLET PRODUCTS, INC.** 

5100 Walnut Grove Ave. • San Gabriel, CA 91778  
(213) 285-3123

For more information, Circle No 210

## Sprague-Goodman. The first and last name for trimmer capacitors.

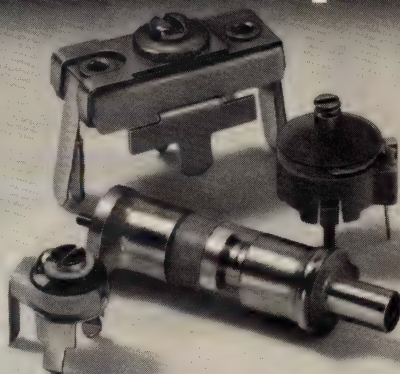

### PISTONCAP®/CERAMIC/FILMTRIM™/MICA

At Sprague-Goodman we specialize in trimmer capacitors. They're our only business. So we offer prompt service and off-the-shelf delivery of our full line of catalog parts. From multi-turn tubular Pistoncaps® in glass or quartz, thru ceramic single turn and Filmtrim™ plastic single turn, to our new Mica compression line.

Our comprehensive line of trimmer capacitors deliver reliability at competitive prices, and our staff is always available for custom designing to your needs.

So the next time trimmer capacitors are called for, call us or your distributor and ask for them by name...Sprague-Goodman.




**Sprague-Goodman Electronics, Inc.**  
(An Affiliate of the Sprague Electric Company)


134 FULTON AVE., GARDEN CITY PARK, N.Y. 11040 • 516-746-1385 • TLX:14-4533

For more information, Circle No 211

## New Products

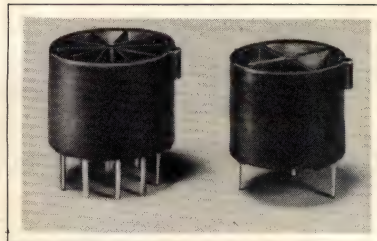

**BURN-IN SOCKETS.** Available with three through 12 gold-plated contacts, TS-5173 TO-pattern devices come in both standard (150°C with BeCu contacts) and high-temperature versions (200°C with BeNi contacts). The units provide very low insertion force for fast loading/unloading and have a center locating stud for added mounting rigidity. \$0.63 (1k). **Robinson-Nugent Inc.**, 800 E Eighth St, New Albany, IN 47150. Phone (812) 945-0211. **Circle No 292**

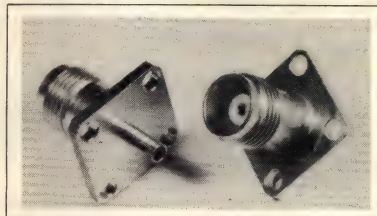

**FLANGE-MOUNT CONNECTORS.** For 0.085- and 0.141-in. semirigid cable that operates at up to 18 GHz, 4500 Series units meet or exceed MIL-C-39012. Model 4055-0002 and -0003 devices come with gold-plated brass bodies, Teflon insulators and beryllium-copper contacts; Model 4055-6002, -6003 units have gold-plated stainless-steel bodies, Teflon insulators and beryllium-copper contacts. Typical specs include VSWR of 1.10 and insertion loss of 0.05 dB from dc to 15 GHz, 0.1 dB from 15.1 to 18 GHz. Models 4055-0002 and -0003, \$7.60; Models 4055-6002 and -6003, \$10.95 (100). Delivery, 14 to 18 wks ARO. **Soliton/Microwave**, Cove Rd, Port Salerno, FL 33492. Phone (305) 287-5000. **Circle No 293**

**CW LASER.** An addition to the company's line of low-divergence lensed cw units, Model LCW-30 combines a multimode cw laser with an NSG Selfoc lens, all in an LDL-9F package. The device provides <7-mrad divergence at 5-mW output. Typical specs include a threshold of 100 mA and operating current of 135 mA at a peak wavelength of 820 nm. \$500. Delivery, 4 to 6 wks ARO. **Laser Diode Laboratories Inc.**, 1130 Somerset St, New Brunswick, NJ 08901. Phone (201) 249-7000.

**Circle No 294**



**SIEMENS**

# Tester's choice.

Our 1108 Series Dip IC Handler is the tester's choice for several great reasons.

One is speed. In ambient or hot configurations, the 1108 is the fastest commercially available handler you can buy: 10,000 per-hour maximum, with 250 ms of test time, and 8 output sorts.

Friendly interface with virtually any tester is another choice benefit of the 1108. That's because it's made by a leading *tester* manufacturer. (We make the 725 Digital IC Tester.)


Contact us now for applications assistance, and for the equipment that's the tester's choice on both ends of the interface cable. Just write or call Mr. Cliff Small, Siemens Corporation, Measurement Systems Division, 2 Pin Oak Lane, Cherry Hill, NJ 08034. (609) 424-9210.




## The Siemens 1108 DIP IC Handler Series



## Selected Applications

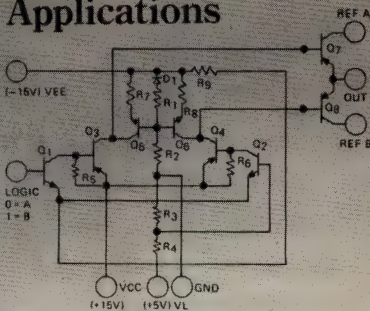

## Select Devices

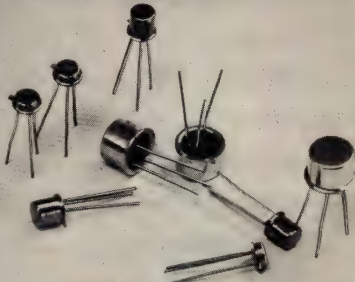

# Bipolar Transistors Aerospace Military Medical

Crystalonics developed the epitaxial junction process for chopper and switching transistors and continues to be the leader in the technology. Our line includes:

- NPN Low Level Switching and Chopper Transistors: BVEBO to 30V,  $r_{ec}$  (sat) to 2 Ohms and  $H_{fe}$  (inv) to 30 (2N6566);  $V_o$  to 0.4 mV (2N2432A).
- PNP Low Level Switching and Chopper Transistors: BVEBO to 50V (2N5231),  $H_{fe}$  (inv) to 50 and  $V_o$  to 0.3 mV (2N2944A);  $r_{ec}$  (sat) to 2 Ohms (2N6567).
- Dual Emitter Choppers, NPN and PNP: BVEEO to 50V,  $V_o$  to 30  $\mu$ V, and  $r_{ec}$  (sat) to 15 Ohms.
- Complementary Ultra-Low  $r_{ec}$  (sat) PNP/NPN Switches: BVEBO 30V,  $V_o$  1 mV, and  $r_{ec}$  (sat) to 2 Ohms.
- JAN/JANTX/JANTXV Transistors: qualified on over 20 types, including the popular series 2N2432 and 2N2946.
- NPN Grown Junction Replacements, including JAN2N333 thru 2N343.


For further information send for our short form catalog.

## TELEDYNE CRYSTALONICS

147 Sherman Street  
Cambridge, MA 02140  
Tel: (617) 491-1670  
TWX 710-320-1196

For more information, Circle No 213

## New Products

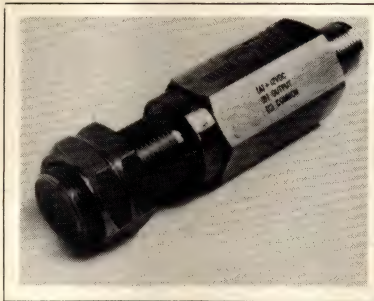

**DIGITAL PICKUP.** Model 4-0063 Zero-Velocity unit uses solid-state circuitry combined with Hall-effect principles to provide constant-amplitude logic pulses from dc to 10,000 Hz. Providing high noise immunity (to 800V transients; UHF radiation of 4W at 462 MHz and a distance of 2 ft; and noise pulses of  $\pm 100$  to 800V pk), the unit operates over  $-25$  to  $+80^\circ\text{C}$ . The stainless-steel-housed pickup's output signals can feed a square-wave fanout of up to 10 TTL inputs at 50% ( $\pm 10\%$ ) duty cycle. \$190. **Airpax**, 6801 W Sunrise Blvd, Ft Lauderdale, FL 33313. Phone (305) 587-1100. **Circle No 295**

**SENSING RELAY.** Series RSR provides single-level control in liquid-level applications requiring nonmechanical detecting and switching. A probe is used to sense the level of water or other slightly conductive liquids. Continuity is sensed between the probe and the liquid, causing the output relay contacts to transfer. Housed in a plug-in package and operating from a 115V ac power supply, the unit has isolated, 5A spdt relay output that energizes when the resistance across the sensing input falls below the preset value. Sensitivity can be supplied fixed or adjustable. \$40. **Control Engineering Inc**, 1686 Riverdale St, West Springfield, MA 01089. Phone (413) 781-1330. **Circle No 296**

**HALL-EFFECT SENSORS.** Housed in thermoplastic threaded bushings, solid-state 200SR Series units are sensitive to magnetic fields and operate at speeds from 0 to 100,000 operations per second. They feature a single digital current-sinking output and come in either 4.5 to 5.5V dc or 6 to 16V dc versions. The logic-level output eliminates the need for amplifiers in most applications. Absolute maximum supply voltage ranges from  $-1.2$  to  $+20$ V dc, with output current to 40 mA max; operating-temperature range equals  $-40$  to  $+105^\circ\text{C}$ . \$8.25 for a typical unit. **Micro Switch**, 11 W Spring St, Freeport, IL 61032. Phone (815) 235-6600. **Circle No 297**

## TI Distributors

ALABAMA: Huntsville, Hall-Mark (205) 837-8700.

ARIZONA: Phoenix, Kierulff Electronics (602) 243-4101; R.V. Weatherford (602) 272-7144; Tempe, Marshall Industries (602) 968-6181.

CALIFORNIA: Anaheim, R.V. Weatherford (714) 634-9600; Canoga Park, Marshall Industries (213) 999-5001; Chatsworth, JACO (213) 998-2200; Costa Mesa, TI Supply (714) 979-5391; El Monte, Marshall Industries (213) 686-0141; El Segundo, TI Supply (213) 973-2571; Glendale, R.V. Weatherford (213) 849-3451; Golsta, RPS (805) 964-6823; Irvine, Marshall Industries (714) 556-6400; Los Angeles, Kierulff Electronics (213) 725-0325; RPS (213) 748-1271; Mountain View, Time Electronics (415) 965-8000; Palo Alto, Kierulff Electronics (415) 968-6292; Pomona, R.V. Weatherford (714) 623-1261; San Diego, Arrow Electronics (714) 565-4800; Kierulff Electronics (714) 278-2112; Marshall Industries (714) 278-6350; R.V. Weatherford (714) 278-7400; Santa Barbara, R.V. Weatherford (805) 465-8551; Sunnyvale, Arrow Electronics (408) 739-3011; Marshall Industries (408) 732-1100; TI Supply (408) 732-5555; United Components (408) 737-7474; Torrance, Time Electronics (213) 320-0880; Tustin, Kierulff Electronics (714) 731-5711.

COLORADO: Denver, Arrow Electronics (303) 758-2100, Diplomat/Denver, (303) 427-5544; Kierulff Electronics (303) 371-6500; Englewood, R.V. Weatherford (303) 770-9762.

CONNECTICUT: Hamden, Arrow Electronics (203) 248-3801; TI Supply (203) 281-4669; Orange, Milgray/Connecticut (203) 795-0714; Wallingford, Wilshire Electronics (203) 265-3822.

FLORIDA: Clearwater, Diplomat/Southland (813) 443-4514; Ft. Lauderdale, Arrow Electronics (305) 776-7790; Diplomat/Ft. Lauderdale (305) 971-7160; Hall-Mark/Miami (305) 971-9280; Orlando, Hall-Mark/Orlando (305) 855-4020; Palm Bay, Arrow Electronics (305) 725-1480; Diplomat/Florida (305) 725-4520; St. Petersburg, Kierulff Electronics (813) 576-1966; Winter Park, Milgray Electronics (305) 647-5747.

GEORGIA: Doraville, Arrow Electronics (404) 455-4054; Norcross, Wilshire Electronics (404) 923-5750.

ILLINOIS: Arlington Heights, TI Supply (312) 640-2964; Bensenville, Hall-Mark/Chicago (312) 860-3800; Elk Grove Village, Kierulff Electronics (312) 640-0200; Chicago, Newark Electronics (312) 638-4411; Schaumburg, Arrow Electronics (312) 893-9420.

INDIANA: Ft. Wayne, Ft. Wayne Electronics (219) 423-3422; Indianapolis, Graham Electronics (317) 634-8202.

IOWA: Cedar Rapids, Deeco (319) 365-7551.

KANSAS: Lenexa, Component Specialties (913) 492-3555; Shawnee Mission, Hall-Mark/Kansas City (913) 888-4747.

MARYLAND: Baltimore, Arrow Electronics (202) 737-1700; (301) 247-5200; Hall-Mark/Baltimore (301) 796-9300; Columbia, Diplomat/Maryland (301) 995-1226; Gaithersburg, Cramer/Washington (301) 948-0110; Rockville, Milgray/Washington (301) 468-6400.

MASSACHUSETTS: Billerica, Kierulff Electronics (617) 667-8331; Burlington, Wilshire Electronics (617) 272-8200; Newton, Cramer/Newton (617) 969-7700; Waltham, TI Supply (617) 890-0510; Woburn, Arrow Electronics (617) 933-8130.

MICHIGAN: Ann Arbor, Arrow Electronics (313) 971-8220; Oak Park, Newark Electronics (313) 967-0600; Grand Rapids, Newark Electronics (616) 241-6681.

MINNESOTA: Edina, Arrow Electronics (612) 830-1800; Plymouth, Marshall Industries (612) 559-2211.

MISSOURI: Earth City, Hall-Mark/St. Louis (314) 291-5350; Kansas City, Component Specialties (913) 492-3555; LCOMP-Kansas City (816) 221-2400; St. Louis, LCOMP-St. Louis (314) 291-6200.

NEW HAMPSHIRE: Manchester, Arrow Electronics (603) 668-6968.

NEW JERSEY: Camden, General Radio Supply (609) 964-8560; Cherry Hill, Milgray/Delaware Valley (609) 424-1300; Clark, TI Supply (201) 382-6400; Clifton, Wilshire Electronics (201) 340-1900; Fairfield, Kierulff Electronics (201) 575-6750; Moorestown, Arrow Electronics (609) 235-1900; Saddlebrook, Arrow Electronics (201) 797-5800.

NEW MEXICO: Albuquerque, Arrow Electronics (505) 243-4566; International Electronics (505) 262-2011; United Components (505) 345-9981.

NEW YORK: Endwell, Wilshire Electronics (607) 754-1570; Farmingdale, Arrow Electronics (516) 694-6800; Freeport, Milgray Electronics (516) 546-6000; N.J. (800) 645-3986; Hauppauge, Arrow Electronics (516) 231-1000; JACO (516) 273-5500; Liverpool, Cramer/Syracuse (315) 652-1000; New York, Wilshire Electronics (212) 682-8707; Rochester, Cramer/Rochester (716) 275-0300; Rochester Radio Supply (716) 454-7800; Wilshire Electronics (716) 235-7620; Woodbury, Diplomat/Long Island (516) 921-7920.

NORTH CAROLINA: Kernersville, Arrow Electronics (919) 966-2039; Raleigh, Hall-Mark (919) 832-4465.

OHIO: Cleveland, TI Supply (216) 464-2435; Columbus, Hall-Mark/Ohio (614) 846-1882; Dayton, ESCO Electronics (513) 226-1133; Marshall Industries (513) 236-8088; Kettering, Arrow Electronics (513) 253-9176; Reading, Arrow Electronics (513) 761-5432; Solon, Arrow Electronics (216) 248-3990.

OKLAHOMA: Tulsa, Component Specialties (918) 664-2820; Hall-Mark/Tulsa (918) 835-8458; TI Supply (918) 749-9543.

OREGON: Beaverton, Almac/Stroum Electronics (503) 641-9070; International Components (503) 653-5940.

PENNSYLVANIA: Huntingdon Valley, Hall-Mark/Philadelphia (215) 355-7300; Pittsburgh, Arrow Electronics (412) 351-4000.

TEXAS: Austin, Component Specialties (512) 837-8922; Hall-Mark/Austin (512) 837-2814; Dallas, Component Specialties (214) 357-6511; Hall-Mark/Dallas (214) 234-7400; International Electronics, (214) 233-9323; TI Supply (214) 238-5821; El Paso, International Electronics (915) 778-9761; Houston, Component Specialties (713) 771-7237; Hall-Mark/Houston (713) 781-6100; Harrison Equipment (713) 652-4700; TI Supply (713) 776-6511.

UTAH: Salt Lake City, Diplomat/Altland (801) 486-4134; Kierulff Electronics (801) 973-6913.

WASHINGTON: Redmond, United Components (206) 885-1985; Seattle, Almac/Stroum Electronics (206) 763-2300; Kierulff Electronics (206) 575-4420; Tukwila, Arrow Electronics (206) 575-0907.

WISCONSIN: Oak Creek, Arrow Electronics (414) 764-6600; Hall-Mark/Milwaukee (414) 761-3000; Waukesha, Kierulff Electronics (414) 784-8160.

CANADA: Calgary, Cam Gard Supply (403) 287-0520; Downsview, CESCO Electronics (416) 661-0220; Edmonton, Cam Gard Supply (403) 426-1805; Halifax, Cam Gard Supply (902) 454-8581; Kamloops, Cam Gard Supply (604) 372-3338; Moncton, Cam Gard Supply (506) 835-2200; Montreal, CESCO Electronics (514) 735-5511; Future Electronics (514) 731-7441; Ottawa, CESCO Electronics (613) 729-5118; Future Electronics (613) 820-8313; Quebec City, CESCO Electronics (418) 687-4231; Regina, Cam Gard Supply (306) 525-1317; Saskatoon, Cam Gard Supply (306) 652-6424; Toronto, Future Electronics (416) 663-5563; Vancouver, Cam Gard Supply (604) 291-1441; Future Electronics (604) 438-5545; Winnipeg, Cam Gard Supply (204) 786-8481.





# The fastest 8K EPROM ever. TMS2508. Available now. From Texas Instruments.

High speed. Reprogrammability. Family compatibility. And availability.

Just a few of the many practical reasons why you should consider the newest member of TI's 5-V Family. TMS2508. An 8K EPROM specifically designed for high-speed.

## For fast microprocessor systems

At 250-ns max access time, 180-ns typical, the TMS2508 is the fastest EPROM on the market. So fast, in fact, that you can design it in for all state-of-the-art microprocessors and not worry about sacrificing performance. The TMS2508 reduces wait states and virtually eliminates the need for any additional wait-state circuitry.

## As a bipolar alternative

Because the TMS2508 is so fast, it also allows you to implement many memory applications previously served only by bipolar PROMs. Only minor board modifications are required to make the switch from bipolar to MOS. (For complete details see Applications Note MM-2508.) And, unlike PROMs, the TMS2508 can be easily and quickly erased and reprogrammed. At any time.

## High performance

In addition, the TMS2508 offers you such outstanding performance features as 8-bit word configuration, automatic chip select/power down and fully static operation.

So, if speed is what you need, go ahead and design with confidence. Go ahead and specify TI's new TMS2508.

There's just no faster 8K EPROM available anywhere. And even faster versions are coming soon.


**For fast delivery** of fast 8K EPROMs, call your nearest authorized TI distributor. He has them on-the-shelf. Priced right. Ready to move.

**For free samples**, write to TI on your letterhead, briefly describing your proposed TMS2508 application. Write to Texas Instruments Incorporated, Dept. S2508, P.O. Box 1443, M/S 6965, Houston, Texas 77001.



**TEXAS INSTRUMENTS**  
INCORPORATED



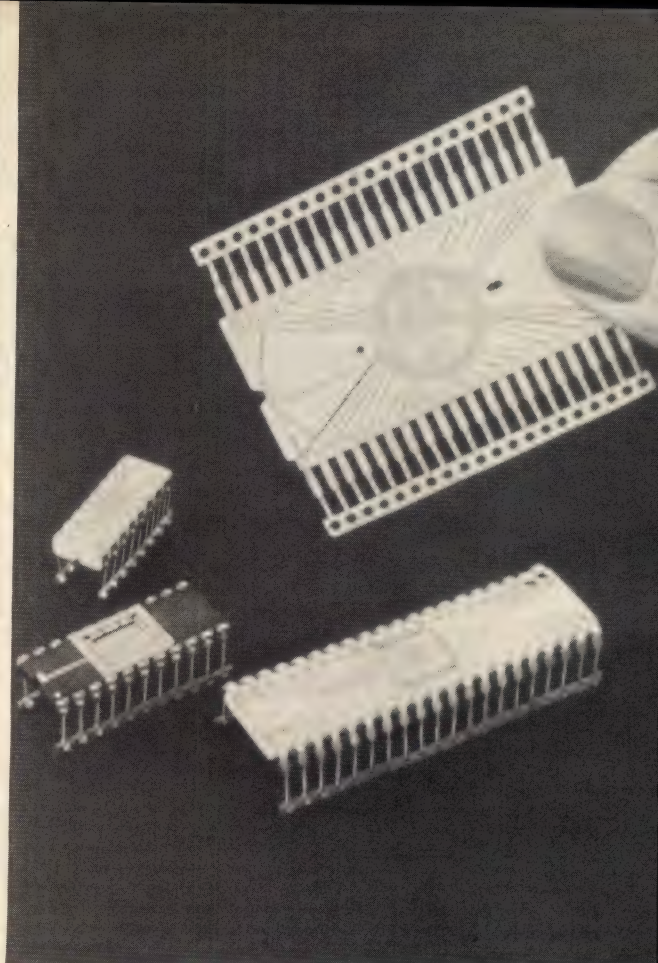

# Engelhard Precious Metals Technology helps make smaller microprocessors!

The next marketing revolution is sure to be the home computer, based on the microprocessor "chip." Engelhard supplies gold, silver, platinum and palladium conductive inks, silver pastes, Rely-Ohm® hybrid resistor inks, Zero Flow multi-layer dielectric inks, electronic grade precious metal powders and metallo-organic solutions for thin-film depositions on glass and ceramic substrates.

Engelhard offers electrical contact alloys in every conceivable form, including sheet, strip, ribbon, wire, rod and fabricated assemblies. There are Engelhard contact materials that offer high current ratings, high melting points, and resistance to welding and arc-erosion.

Manufacturers of electric/electronic equipment save money with Engelhard's clad contact materials, specially designed to employ precious

and base metals to effect significant economies.

Our electroplating processes and materials are used in printed circuits, connectors, reed switches, semi-conductors, IC's and vacuum tube grids.

Engelhard's platinum clad or platinum plated tungsten or molybdenum wire is used in high power micro-wave tubes. Our Silvaloy™ brazing alloys include VTG filler metals. Engelhard supplies a variety of precision miniature parts for relays, switches, resistors, potentiometers, semi-conductors and other devices. And we operate sophisticated refining facilities to recover precious metals from your scrap and plant wastes for recycling and added profitability.

Find out how Engelhard precious metals technology works for the electronics industry!

Write or call Engelhard today. (201) 589-5000.

**ENGELHARD**

ENGELHARD INDUSTRIES DIVISION  
ENGELHARD MINERALS & CHEMICALS CORPORATION  
2655 U. S. ROUTE 22, UNION, NEW JERSEY 07083

For more information, Circle No 215



# When you need LEDs or more than LEDs...



Dialight is the first place to look. We can help you do more with LEDs... because we've done more with them.

Discrete LEDs come in a variety of sizes, shapes, colors (red, yellow, green in clear or diffused), with or without built-in resistors.

Low cost logic state fault indicators for trouble shooting complex circuits. Designed for close density PC board mounting.

High-brightness bi-color LEDs (red/green) suitable for go/no-go situations. Designed with unique

lenses for the extra visibility you'll want for your most critical applications.

Snap-in mounting LED indicators reduce labor cost. Available in red, yellow or green with or without built-in resistors.

Whatever you need in LEDs, Dialight's probably got it already. For your free 60-page selector guide and listing of our nationwide stocking distributors, contact us today.

**DIALIGHT**  
A North American Philips Company

## Dialight meets your needs.

Dialight, 203 Harrison Place, Brooklyn, N.Y. 11237 (212) 497-7600

For more information, Circle No 216



# BEST DESIGNER FEATURES IN DPM'S



**DM-4100N**  
4½ Digits  
Low Profile Case

**DM-3100L**  
\$50 (1-9)  
Short Depth Case

Imagine quality OEM Digital Panel Meters with all these features at such low cost!

## 3½ DIGIT DPM'S

	MODEL	INPUT	CASE STYLE	DISPLAY	POWER	FEATURES	PRICES
LED DISPLAY	DM-3100L	±2V, balanced differential	Short Depth	.56" High LED	+5 Vdc @ .28A	Ultra-low cost	\$50 (1-9)
	DM-3100N	±2V, balanced differential	Low Profile	.56" High LED	+5 Vdc @ .28A	Optional off-set pot	\$50 (1-9)
	DM-3100B	±2V, balanced differential	Short Depth	.56" High LED	115/230 AC, pin-selected	Low cost AC power	\$70 (1-9)
LIQUID CRYSTAL DISPLAY	DM-3100X	±2V, balanced differential	Short Depth	.6" High Liquid Crystal	+5V, 6mA or 9-15V	Battery Powered	\$66 (1-9)
	DM-3100U1	±2V, balanced differential	Low Profile	.5" High Liquid	+5V, 6mA or 9-15V	Programmable Descriptors	\$60 (1-9)
	DM-3100U2 DM-3100U3	±2V, balanced differential	Low Profile	.5" High Liquid Crystal	115AC(U2) 230AC(U3)	Programmable Descriptors	\$69 (1-9)

## 4½ DIGIT DPM'S

LED DISPLAY	DM-4100L	±2V, single-ended	Short Depth	.56" High LED's	±5Vdc @ .4A	Low cost 4½ digit	\$88 (1-9)
	DM-4100N	±2V, single-ended	Low Profile	.3" High LED's	+5Vdc @ .4A	Low cost, 4½ digit	\$93 (1-9)

Case Styles - Short depth Case: 1.760"H x 3.00"W x 2.150"D, cutout: 1.812" x 3.062"  
Low Profile Case: 0.94"H x 2.531"W x 3.25"D, cutout: 0.97" x 2.562"

Substantial OEM Discounts available

### OUTSTANDING SPECS COMMON TO ALL MODELS

- Autozeroing
- Ratiometric reference to reduce drift
- 1000 Megohm input impedance
- 5 pA input bias current

### User-added options:

- Internal attenuators for ranges up to ±1 kV
- Internal current shunts for ranges up to ±2A



11 CABOT BOULEVARD, MANSFIELD, MA 02048 / TEL. (617)339-9341 / TWX 710-346-1953 / TLX 951340  
Santa Ana, (714)835-2751, (L.A.) (213)933-7256 • Sunnyvale, CA (408)733-2424 • Gaithersburg, MD (301)840-9490  
• Houston, (713)781-8886 • Dallas, TX (214)241-0651 OVERSEAS: DATEL (UK) LTD—TEL: ANDOVER (0264)51055  
• DATEL SYSTEMS SARL 602-57-11 • DATELEK SYSTEMS GmbH (089)77-60-95 • DATEL KK Tokyo 793-1031

CALL TODAY FOR YOUR FREE ENGINEERING PRODUCT HANDBOOK

For more information, Circle No 217



# New Products



**MODULATOR.** Model MOD503 furnishes up to  $\pm 0.1\%$  full-scale linearity, accepts  $\pm 10$  or  $\pm 100V$  dc inputs ( $100\text{ k}\Omega$  min) and provides an ac output of 0 to 7V rms. Output impedance equals  $1\Omega$  max; outputs are short-circuit protected, and the unit is insensitive to  $\pm 10\%$  reference line changes. Other features include reference input of 26V, 400 Hz ( $\pm 5\%$ ) (60-Hz units also available) and  $\pm 15V$  at 50 mA (max) power requirement. Gain and zero-adjustment capability comes standard. <\$100 (OEM qty). **Computer Conversions Corp.**, 6 Dunton Ct, East Northport, NY 11731. Phone (516) 261-3300. **Circle No 298**

**DC MOTOR.** Requiring no external electronics, this 12V dc unit suits cassette recorders, data recorders and any other devices requiring a constant-speed motor. Model SE34-T1M1 holds its rated speed of 2400 rpm to within  $\pm 36$  rpm by means of a built-in electronic control. Rated load is 9 g-cm; rated current, 90 mA; starting torque equals 80 g-cm at 10V. The 39-mm-diameter, 34.2-mm-long device weighs 120g. <\$3 (OEM qty). **Canon USA Inc.**, 10 Nevada Dr, Lake Success, NY 11042. Phone (516) 488-6700. **Circle No 299**

**RECTIFIER BRIDGES.** Units in the 1/1.5DB Series of DIP devices come in current ratings of 1 and 1.5A avg, with peak-inverse-voltage ratings of 50 to 1000V. The metal-oxide-passivated silicon-rectifier junctions employed in the transfer-molded epoxy units provide high-temperature performance and reliability said to equal that of hermetically sealed glass devices. The bridges withstand a 25A current surge for up to 10 msec, and two of the units fit end-to-end in a standard 14-pin DIP socket. \$0.45 for a typical 1A, 400V unit;

\$0.50 (1k) for 1.5A version. Delivery, 4 to 6 wks ARO. **Codi Semiconductor Inc.**, Pollitt Dr, Fair Lawn, NJ 07410. Phone (201) 797-3900. **Circle No 300**

**AMP/BIAS OSCILLATOR.** Model 34 audio amplifier and 100-kHz magnetic-tape bias oscillator/buffer is a dual-purpose module suited for general-purpose signal processing. Features

include short-circuit-proof output, up to 1- $\mu F$  output capacitive loading capability and 20V rms output into a 1-k $\Omega$  load when functioning as a 100-kHz oscillator. Other specs include 8 to 30V (24V nominal) power requirement, 34-dB ( $\times 50$ ) gain and 20-Hz to 20-kHz ( $\pm 2$  dB) frequency response (0.25% THD, +18 dBm). \$25. **Opamp Labs Inc.**, 1033 N Sycamore Ave, Los Angeles, CA 90038. Phone (213) 934-3566. **Circle No 301**

## Invertron® AC Power Equipment

# First Again in Programmable AC Power!

## Ideal for ATE Applications



New Model 845T Invertron Programmable Oscillator provides the ability to control both frequency and amplitude by parallel BCD or IEEE-488 instrument bus. Packaged as a compact PWB module it can be plugged into the oscillator cavity of any Invertron Solid-State AC Power Source.

The 845T Invertron Oscillator is digitally synthesized and crystal controlled to provide frequencies from 45Hz to 9999Hz accurate to  $\pm 0.005\%$  of programmed value. Voltage accuracies from  $\pm 0.15\%$  to  $\pm 0.25\%$  and line and load regulation of  $\pm 0.01\%$  make this oscillator ideal for high speed production ATE applications.

In applications where local manual control and/or visual displays are required, the Model 846CM Invertron Control Module is available and requires only 1.75" rack panel height.

For more information on these new products or for information on the fully programmable Model 830T, call or write Sales Manager, California Instruments.

**Invertron®**  
**California Instruments**  
Division of Norlin Industries

5150 Convoy Street, San Diego, California 92111 / Telephone: (714) 279-8620

For more information, Circle No 218




# SEAELECTRO

The reliable, economical way to program or switch circuits. Positive, easy-to-read, and easy to change jumper plugs and jumper jacks are the modern devices for data, voice or video switching.

Seaelectro offers a wide choice of plugs and jacks with fast delivery, finest quality and unsurpassed real value. Additionally, Seaelectro, and only Seaelectro offers the new exclusive Jump-Jax which is already revolutionizing the jumper concept.

**THE  
JUMPER  
SOURCE**

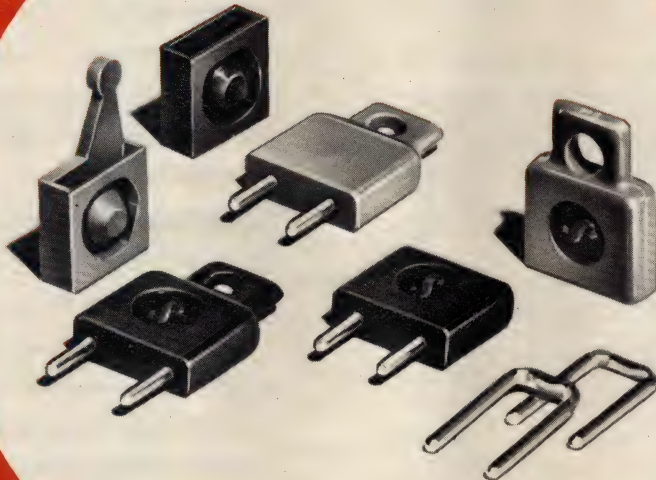

- ✓ Jumpers with/without handles.
- ✓ Choice of colors for coding.
- ✓ Choice of terminal spacings.
- ✓ Exclusive Jump-Jax for lower cost, greater reliability and life.

SEND FOR COMPLETE CATALOGS



CIRCUIT COMPONENTS DIVISION

**SEAELECTRO  
CORPORATION**

MAMARONECK, N.Y. 10543

PHONE: 914 698-5600 TWX: 710-566-1110

Seaelectro West:

14011 Ventura Blvd., Suite 215, Sherman Oaks, Ca. 91423, (213) 990-8131

1901 Old Middlefield Way, Suite 19, Mountain View, Ca. 94043 (415) 985-1212

Seaelectro Ltd., Portsmouth, Hants, England

Seaelectro S.A., Zone Industrielle Toulon Est, 83087 Toulon Cedex, France

CIRCUIT COMPONENTS ■ R. F. COMPONENTS ■ PROGRAMMING DEVICES





# MEET SLIM.



## YOUR MEASURABLE ADVANTAGE FOR THE FUTURE, NOW!

Put your hand around A. W. Sperry's new, super-safe Slim-Snap™ volt-ohm-ammeter, and experience the shape of things to come. Beyond its sleek, trim shape there's a totally new experience in Snap-Around test instruments.

As the trend-setter for the 80's, the super-safe Slim-Snap is the first Snap-Around to feature a 600 VAC rated fuse in its Ohmprobe®. For tight spots, the tear drop-shaped Easy-Probe™ jaws fit where others can't go.

Other trend-setting features include innovative

low-mass meter movement that minimizes shock damage, range selector switch with window display, pointer lock, internally threaded ohm terminal, twist and lock safety test leads, pocket size, one hand operation with fingertip controls, convenient wrist strap, and a shock resistant ABS plastic housing.

Get a firm grip on your test measurements now, with the revolutionary new Slim-Snap. Call your distributor or contact A.W. Sperry Instruments Inc., 245 Marcus Blvd., Hauppauge, New York 11787, 516-231-7050.

**A.W.SPERRY INSTRUMENTS INC.**  
**The Measurable Advantage.**

For more information, Circle No 220



# Therm-O-Disc®

## RELIABLE DISC-POWERED TEMPERATURE CONTROLS



36T



36T Manual Reset



36T Stud Mount



36TM



63TM



36T

(Controls approx. 4/5 actual size)

## If you have the VOLUME, Therm-O-Disc has the PRICES!

If you need temperature controls for high volume commercial applications — and will order 1,000 or more at a time — we can meet your requirements and save you money.

Our production lines are tooled to satisfy the volume requirements of the appliance and automotive industries. That's why we can offer you these low Therm-O-Disc prices.

Take advantage of our high volume and low costs. Check the general rating guide below, then ask us for technical bulletins with complete electrical ratings recognized by UL, CSA, and International testing agencies. Samples and quotations will be supplied on request.

### GENERAL RATING GUIDE [100,000 Cycles]

Type	Resistive Amperes	Inductive		Volts AC
		FLA	LRA	
36T Up to 350°F	13.75	5.8	34.8	120
	10.0	2.9	13.0	240
63TM Up to 500°F	8.5	125 VA Pilot Duty		120

## THERM-O-DISC, INCORPORATED

A Subsidiary of Emerson Electric Co.




1320 South Main Street  
Mansfield, Ohio 44907  
Telephone 419/756-5911  
Telex 987455

For more information, Circle No 221

## New Products

### ICs & SEMI- CONDUCTORS

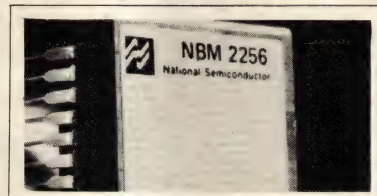

**BUBBLE MEMORY.** The 256k-bit NBM2256 chip is organized into even and odd loops of 1024 bits each, which are loaded through swap gates and read via replicate gates at opposite ends of 10 storage loops. The architecture, designed to store data in 256 loops and an error-correcting code in six loops, provides usable data storage of 262,144 bits or 32k bytes. A redundancy map is also furnished on chip in a dedicated map loop.

At an operating frequency of 100 kHz, the unit has a data rate of 100k bps and 7-msec average access time to the first bit of a random data block. Typical power dissipation equals about 750 mW, and the 16-pin-DIP device uses 5 and 12V power supplies.

Until the support circuits become


available this summer, you can get the NBS100 evaluation board containing the 256k-bit bubble memory, all drive and support circuitry and  $\mu$ P-based controller. The NBS101 expansion board offers 1024k bits of memory storage and utilizes the controller from the NBS100. NBM2256, \$500; NBS100, \$1300; NBS101, \$2500. **National Semiconductor**, 2900 Semiconductor Dr., Santa Clara, CA 95051. Phone (408) 737-5000.

Circle No 325

**COUNTER/DRIVERS.** Providing 4½-digit capability and direct interface to nonmultiplexed vacuum-fluorescent displays, the ICM7236 decade counter furnishes a maximum count of 19,999; intended for timing, the -A Model provides a maximum count of 15,959. Both CMOS devices include on-chip decoders, output latches, count inhibit, reset and leading-zero blanking circuitry, in addition to 29 high-voltage open-drain p-channel transistor outputs. High-frequency counting rates are guaranteed to 15 MHz with typical rates of 25 MHz at 5V. \$4.25 (100) in 40-pin plastic package. **Intersil Inc.**, 10710 N Tantau Ave., Cupertino, CA 95014. Phone (408) 996-5100.

Circle No 326

## The Power Saver®

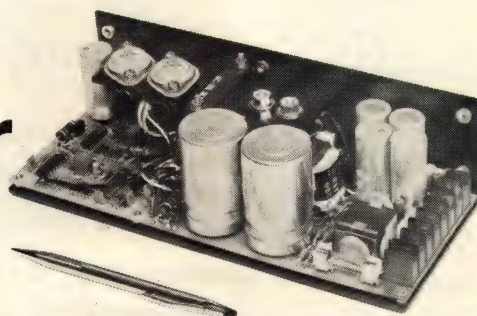


Power Dynamics offers the first in a series of open-frame switching power supplies for the OEM user. Unencumbered by past ideas and methods, Power Dynamics offers advanced technology and conservative design to meet today's need for higher efficiencies and reliability.

The Model PD100 is a convection-cooled 20 amp supply with a user specified output of 2 to 48 VDC.

### Features Include:

- Dual Range 115/230 VAC Strappable Inputs
- Undegraded Performance to 50°C
- 30 msec Holdup Time
- No Overshoot on Turn-On or Turn-Off
- Fully Protected Output
- Designed to Meet UL 478
- Two Year Warranty

The Model PD100 is in stock. Call us for your application:  
(213) 767-9640, 875-1012 • TWX: 910-498-4841



## POWER DYNAMICS CORP.


9421 Telfair Avenue, Sun Valley, CA 91352

For more information, Circle No 222



## No compromise solutions.

The Tektronix S-3280 is the first test system specifically designed to test ECL, LSI devices. Every S-3280 has high-speed drivers, giving you a pulse source for every channel.



Precision fixturing allows you to connect the device to the tester with minimum signal distortion. And there are up to 64 channels of sampling for waveform analysis, ensuring high fidelity.

## Flexibility.

Multiple pattern sources give you an effective, flexible means of implementing complex patterns. Choose the method of pattern generation that fits the device under test.

## Compatibility.

Only one language to learn. All Tektronix S-3200 systems use TEKTEST, a test-oriented language very close to English. Your test engineers will quickly generate, edit, and debug device-testing programs.



## Proven performance.

Semiconductor test systems are nothing new to Tektronix, we've been building them for years. In addition to the S-3280 ECL, LSI tester, there's the S-3270 for device characterization, and the S-3250 for production testing. Each has a 20 MHz clock rate. Our wide variety of options allows you to buy what you need now, and add to it anytime.

## Training.

We'll support your test engineers with a comprehensive training program and thorough documentation.

## Worldwide support.



## We're a phone call away.

To find out which S-3200 system and options best meet your needs, call in the U.S.: 503-645-6464. In Europe, Africa, Middle East: (The Netherlands) 020-471146. In Japan and Far East: (Tokyo) 03-448-4851.

**Tektronix®**  
COMMITTED TO EXCELLENCE

# Another first from Tektronix. The high-speed solution for subnanosecond logic testing.

**High-speed drivers.**

**Precision 50 ohm fixturing.**

**Waveform analysis.**

**We make moving ahead easy.**



S-3280



# electrocube capacitors SUBMINIATURE MYLAR\*

BEFORE  
40 mfd, 200V



AFTER  
40 mfd, 35V

## ...thin is in

Save up to 50% of your PCB real estate with these new subminiature 35 VDC Series 230 wrap-and-fill and epoxy case Mylar capacitors. Choose from a wide selection of capacitances...0.0010 to 100 mfd. **Thin is in** at Electrocube...contact us at 1710 So. Del Mar Ave., San Gabriel, CA 91776; or call (213) 573-3300.

\*TM DuPont

For more information, Circle No 223

## New Products



**COMMUNICATIONS IC.** The F6856 communications-protocol controller provides both bit- and byte-oriented protocol capability, including complete on-chip Bisync protocol processing. It handles most popular line protocols, including SDLC, HDLC, ADCCP and DDCMP. You can program the four 16-bit addressable on-board registers to specify the desired protocol. Functions provided by the TTL-compatible, 1M-bps device include conversion of bit-serial data to either an 8- or 16-bit parallel data stream and conversion of transmission codes to computer codes (normally NRZI to NRZ). \$24.50 in 40-pin plastic package; \$29.90 (100) in ceramic side-brazed package. **Fairchild MOS Products Group**, 101 Bernal Rd, San Jose, CA 95119. Phone (415) 962-3816. **Circle No 327**





**ARIES** T.M.  
ELECTRONICS, INC.

P.O. Box 130  
Frenchtown, N.J. 08825  
Telephone (201) 996-6841  
TWX 510-235-3391

Headers • Sockets • Jumpers, etc., For Back Panel Packaging

## TOP-SLOT™ PROGRAMMABLE HEADERS and COVERS


Complete versatility for programming within the header itself... thus eliminating the need for costly DIP switches for many applications. No parts to be removed...connections simply separated. No loose parts.



Plain snap-on cover protects individual programmable header.

Top-Slot snap-on cover protects and disconnects all adjacent pins with isolation barriers between each pin. Square openings allow programming of opposing pins with hand tool or Arbor press.

Aries hand tool for low production.



Aries Arbor press for quantity applications.



See other Aries products on EEM pages 1671-72-73-74.

For more information, Circle No 224

## Microcomputer Design Courses

*Hardware, software, systems design. You can now learn about all aspects of microcomputers through EDN's exclusive design courses.*

- NEW 1979 Microcomputer Systems Reference Issue (over 400 pages) .... \$6.00  
Features: EDN's 6-chapter "Software Systems Design Course" (a step-by-step tutorial for a 16-bit  $\mu$ C disc operating system),  $\mu$ P Directory,  $\mu$ C Support Chip Directory,  $\mu$ C Board Directory.
- 1978 Microcomputer Systems Reference Issue (420 pages) ..... \$5.00  
Features: EDN's 7-chapter "Software Systems Design Course" (a step-by-step tutorial for a  $\mu$ C disc operating system),  $\mu$ P Directory,  $\mu$ C Support Chip Directory,  $\mu$ C Board Directory.
- 1977 Microcomputer Systems Reference Issue (314 pages) ..... \$4.00
- Microcomputer Design Course (11 chapters, 83 pages) ..... \$5.00
- EDN Software Design Course (90 pages) ..... \$5.00

(Add \$1.00 to each of the above for Canada)  
(Add \$2.00 to each of the above for non-USA)

**Buy in combination and save even more**

- Any two items—Deduct \$1.00
- Any three items—Deduct \$2.00
- Any four items—Deduct \$3.00

**NOTE: Prices Effective April 5, 1979**

Payment must be included with your order. Make checks payable to: EDN Reprints

Send to:  $\mu$ C Reprints/EDN Magazine/ 221 Columbus Ave./ Boston, MA 02116

Please send: \_\_\_\_\_ copies 1979  $\mu$ C Systems Reference Issue—\$6.00  
\_\_\_\_\_ copies 1978  $\mu$ C Systems Reference Issue—\$5.00  
\_\_\_\_\_ copies 1977  $\mu$ C Systems Reference Issue—\$4.00  
\_\_\_\_\_ copies  $\mu$ C Design Course—\$5.00  
\_\_\_\_\_ copies EDN Software Design Course—\$5.00

**Total \$** \_\_\_\_\_ (Non-USA, add \$2.00 to each item, Canada add \$1.00 to each item)

Check or money order must accompany each order. No COD. MA residents add 5% Sales Tax.

Name \_\_\_\_\_ Title \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_



# We can custom-fit standard motors to suit your special designs.




With a little alteration to any of our standard catalog items, we can tailor the motor configuration you need — without high costs or long delays.

Need special windings, lead lengths, terminal ends, mounting brackets? A certain torque at a prescribed speed? Special gear train? Of all the precision motors we deliver, 75% are customized. Our sales engineers will work with you to solve design problems or meet unusual application conditions.

Whether you need a stepper motor the size of a quarter, or a brushless d.c. motor to drive 14" rigid disks, write for our free catalog of standard motors. We'll show you where we start; you take it from there. AIRPAX/North American Philips Controls Corp., Cheshire Industrial Park, Cheshire, CT 06410. Phone (203) 272-0301.

*For immediate need, Circle no 31  
For reference only, Circle no 32*

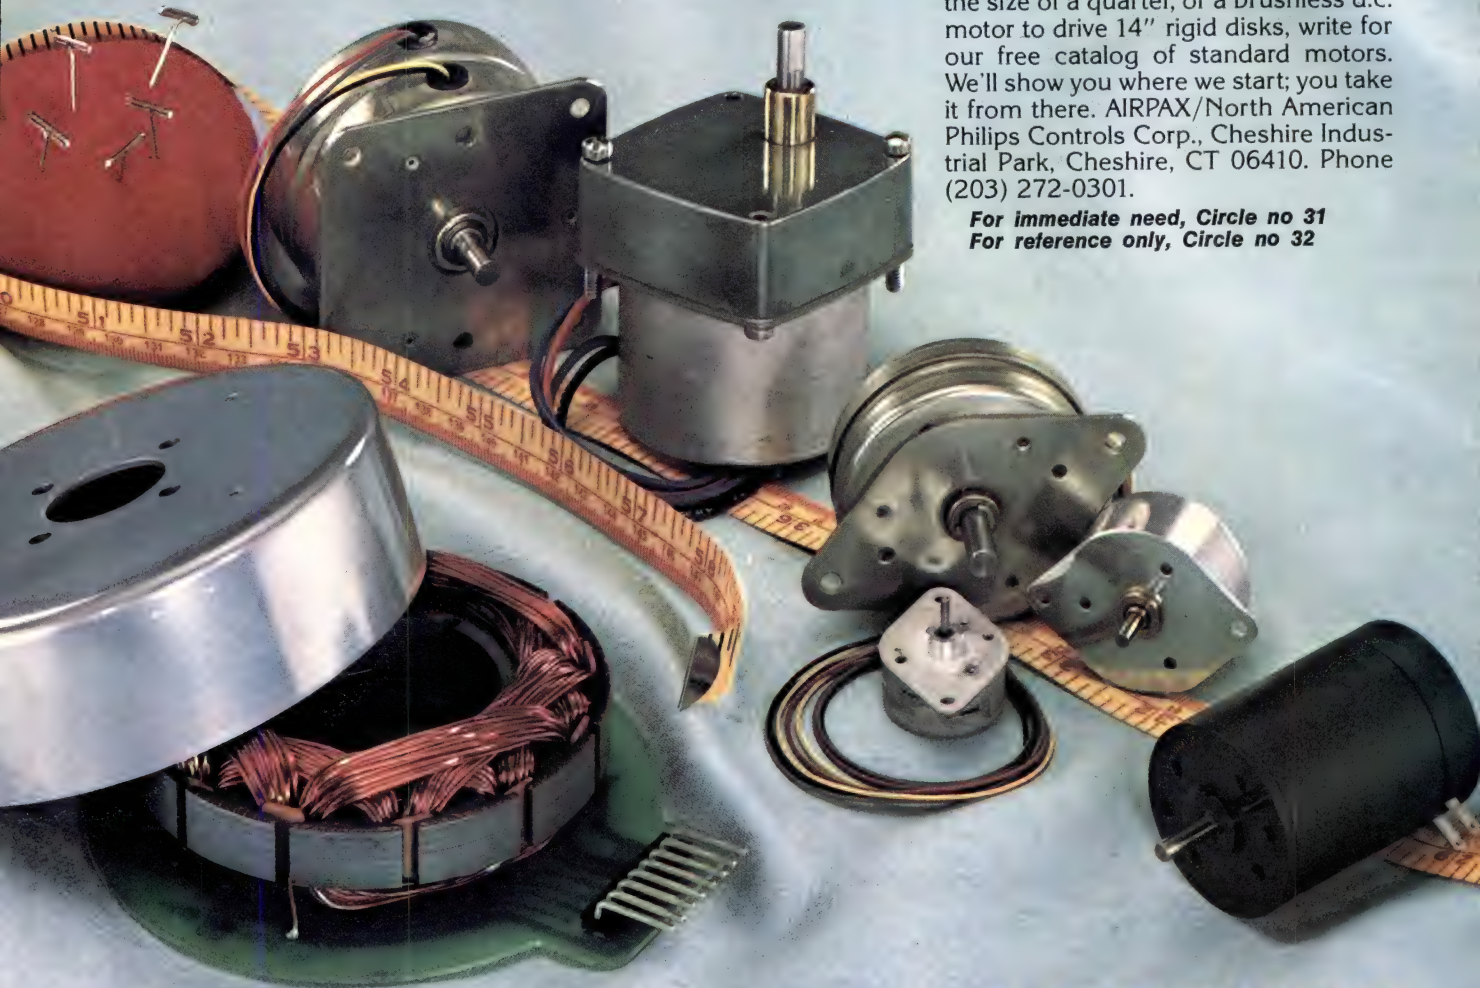

## AIRPAX®

NORTH AMERICAN PHILIPS CONTROLS CORP.

Cheshire Division



# TINI-DW

a good reason to switch

Now, you have an even greater choice of 15mm or 10mm Tini-DW Multi-Switch® switches. Like our 15mm pushbutton with a new, unique internal "flip-flop" mechanism. It provides color indicator panels for instant position recognition. There's one bright color for the "in" position (with or without legends), and another for the "out" position (and/or legend). Six colors are offered: red, green, blue, yellow, black and white. And, it's an energy saver! There is no electrical energy, no lamp replacement, no heat generation and no extra switching.

Our 10mm Tini-DW switches are ideal where size is a crucial factor. We offer a full set of mechanical functions and a wide choice of pushbutton colors, legends and terminals.

Of course, all Tini-DW switches feature our exclusive "snap-slide" switching technique, give up to 18 stations in a row without bowing and have full 0.5A, 125VAC or DC rating.

Applications include analog and digital computers, analyzers, transmitters and receivers, intercoms, numerical control, ground support systems, scientific instruments, home entertainment systems and appliances.

When size, rugged reliability and low cost are primary considerations, look to Switchcraft® for the answer. Call Ken Kline at 312/792-2700. Or send for New Product Bulletin No. 349.

**SWITCHCRAFT®**  
— INC. —


5555 N. Elston Avenue,  
Chicago, IL 60630

For more information, Circle No 226

See us at Electro '80 Booth #3000/3002




# New Products

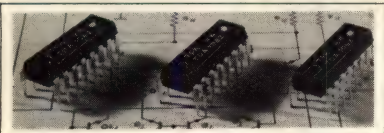

**VHF IC.** Model TDA1062, claimed the only available monolithic integrated VHF front end capable of operating in a 30- to 250-MHz frequency range, contains on one chip an integrated RF amplifier, oscillator, double-balanced mixer, AGC preamplifier and voltage-regulating circuitry. Applications for the 16-pin-DIP unit include use in medium- and high-quality communications tuners, FM front ends and high-frequency mixers. Specs include typical supply voltage of 10V at 30 mA, RF power gain of 30 dB, 5.5-dB noise figure and -40 to +85°C operating-temperature range. \$0.75 (OEM qty). **AEG-Telefunken Corp.**, Rte 22-Orr Dr, Somerville, NJ 08876. Phone (201) 722-9800. **Circle No 328**

**45-NSC MULTIPLIER.** The MPY-8HUJ unsigned-magnitude TTL multiplier has on-chip input and output registers that speed up operation, reduce system overhead and simplify interfacing to 8-bit  $\mu$ P systems. Suited to digital video-signal processing and digital filtering, the 40-pin ceramic DIP is a parallel-array unit that accepts 8-bit inputs and provides a 16-bit double-precision product. The unit achieves a speed-power performance index of <0.8 pJ per equivalent gate and requires one 5V power supply. \$48 (100). **TRW/LSI Products**, 2525 E El Segundo Blvd, El Segundo, CA 90245. Phone (213) 535-1831. **Circle No 329**

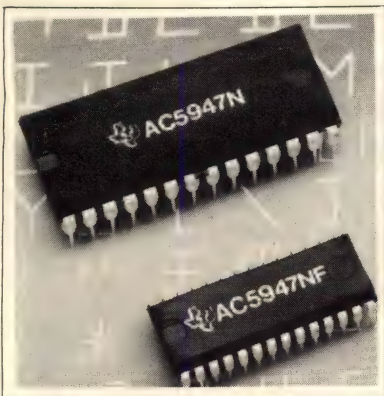

**DISPLAY DRIVER.** For 18-segment alphanumeric displays, Model AC5947 features on-chip latches for the ASCII input data and output enable for display blanking and duty-cycle dimming. TTL

compatible, the unit uses a 5V supply and produces the ASCII set of letters, numbers and characters while using only 1/5 the number of digit lines required by a 5x7 dot-matrix system. Maximum output current is 64 mA per segment, allowing one device with the addition of external multiplexing circuitry to drive up to 16-digit displays without external segment buffers. AC5947N, in a 0.6-in.-wide package with 0.1-in. pin

spacing, \$3.76; AC5974NF, in a 0.4-in.-wide package with 0.07-in. pin spacing, \$2.93 (100). **Texas Instruments Inc.**, M/S 308, Dallas, TX 75265. Phone (214) 238-2011. **Circle No 330**

## JOB SHOPPING?

Check EDN's Career Opportunities  
**EDN: Everything Designers Need**

## DESIGNING A SYSTEM THAT REQUIRES A PRINTER?

### Think Fixed Head Thermal

Mechanical printers? They're too noisy, too expensive, they cost too much to maintain. And they're not nearly as reliable as GULTON'S fixed head thermal printers with only one moving part, no ink system, ribbon mechanism, hammer or moving head problems. No RFI, either. And we make our own printheads for added reliability.

Whatever your requirements . . . numeric, alphanumeric or printer/plotter, GULTON printers interface easily with your microprocessor or BCD data sources.

So, if you're designing a system that requires a printer, think fixed head thermal . . . think GULTON.

Also from GULTON: O.E.M. Recorders; Techni-rite Oscillographic Chart Recorders; Rustak Trend and Event Recorders and West Temperature Controls.



Measurement & Control Systems Division

Gulton Industries Inc., East Greenwich, Rhode Island 02818  
401-884-6800 • TWX 710-387-1500



For more information, Circle No 227



# For expert help on improving telecommunications equipment, call Camcar.


Helping telecommunications equipment designers with their fastening requirements is our business. Specialized, in-depth engineering on threaded fasteners and metal parts can help speed assembly and improve product performance and integrity. Each of Camcar's ten engineering and production centers specializes in a distinct area of fastener technology, giving you a single highly resourceful supplier of both standard and special fasteners. From telephones to walljacks to switching stations to satellites, Camcar-produced parts are helping the industry improve the best communications systems in the world. Check these typical examples.

To explore your opportunities for speeding assembly, improving products and reducing costs with well-engineered fasteners, just pick up your telecommunicator and call 815/226-7721.




Camcar Division of Textron Inc.


600 Eighteenth Avenue  
Rockford, Illinois 61101

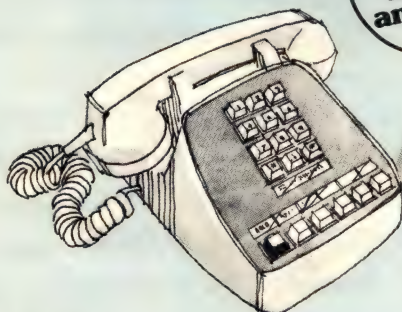

A special double-ended machine screw stud serves as an essential and durable working part in push button multi-line telephones.




Two beveled captive washers on a slotted steel screw form this Camcar Spade-Sert® for easy quick connections in walljack assemblies.

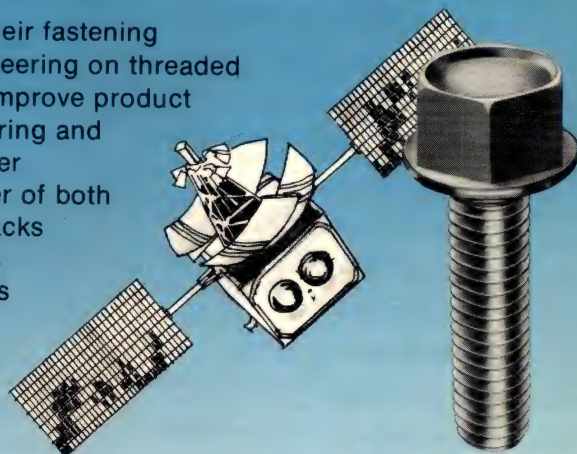

This Taptite® high performance thread forming fastener is so reliable it is in service in satellites that support America's Satellite Communications System.



Camcar doesn't sell "specials" where standards will do just as well. An example is this standard thread cutting screw used in Central Office switching equipment.

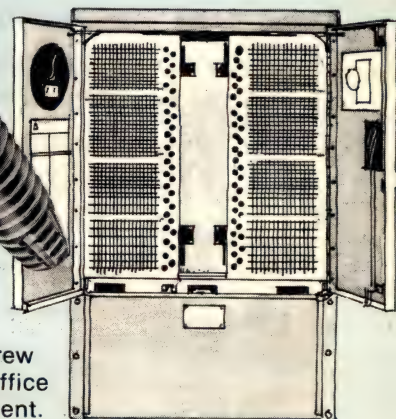


Taptite® is a registered trademark of Research Engineering and Manufacturing.  
Spade-Sert® and Shapes that fasten and save® are registered trademarks of Camcar Division of Textron Inc.

For more information, Circle No 228




# Literature

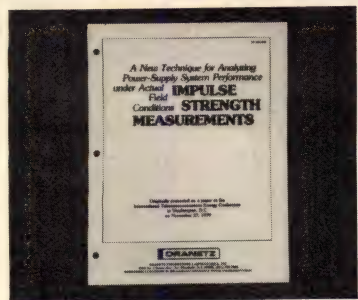

## Measurement technique analyzes power supplies

A comprehensive applications bulletin examines a new technique for analyzing power-supply system performance under field conditions, using impulse-strength measurements. The 8 pages are fully illustrated with block diagrams, graphs and instrument printouts and focus on methods of line-disturbance monitoring—the ability to measure, record and analyze an impulse in terms of its volt-second strength, its polarity and its direction. Two applications—computing a pulse's destructive power and computing impulse propagation through a filter—are described in the appendix. **Dranetz Engineering Laboratories Inc.**, 2385 S Clinton Ave, South Plainfield, NJ 07080. **Circle No 303**

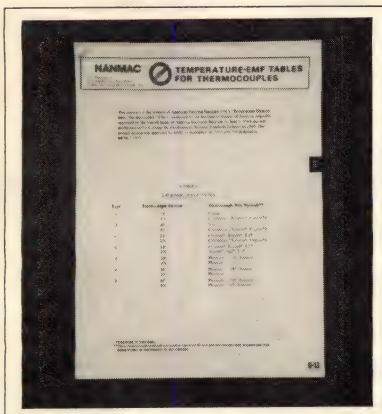

## Temperature-EMF tables for thermocouples

An 18-pg booklet includes the full ANSI revised standard tables for all standard thermocouple element/wire combinations. It presents all temperature-EMF tables in both °F and °C; current temperature-EMF tables for three widely used W/Re thermocouples complete the brochure. **Nanmac Corp.**, 9-11 Mayhew St, Framingham Center, MA 01701. **Circle No 304**

## Extensive information on digital panel instruments

The extensive designer's-guide tutorial section of this catalog contains tips on how to select digital panel instruments and provides successful application information. Along with definitions, the 100 pgs include full data sheets describing 20 digital panel meters from a

3-digit "displayless DPM" and a true-rms/dB meter to 4¾-digit instruments and 6-channel, automatic-scanning temperature meters. The catalog also details temperature probes, low-level signal conditioners and power supplies—and includes a selection checklist. **Analog Devices**, Rte 1 Industrial Park, Norwood, MA 02062.

**Circle No 305**

# RECORDER RELIABILITY

## With a 30 Year Track Record

RUSTRAK miniature, pressure writing, trend recorders have been used for more than 3 decades in all types of applications:

- Temperature
- Relative Humidity
- Light Intensity
- Wind Velocity
- Wind Direction
- Air Pollutants
- Dissolved Oxygen
- pH
- Pressure
- Radiation Intensity
- Sound Level
- Conductivity
- Efficiency Monitoring
- Strain
- Vibration
- Refrigeration/Air Conditioning
- AC Voltage, Current and Power Consumption

and many others. You can depend on 24 hour a day unattended operation for a month or more without changing paper. Rely on RUSTRAK.

Also from GULTON: Techni-rite Oscillographic Chart Recorders; O.E.M. Recorders; WEST Temperature Controls; and Fixed Head Thermal Printers.

**rustrak** | **gulton®**

## Measurement & Control Systems Division


Gulton Industries Inc., East Greenwich, Rhode Island 02818  
401-884-6800 • TWX 710-387-1500



For more information, Circle No 229



# monolithics library

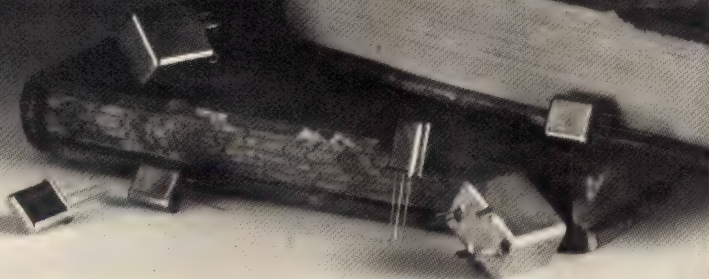

We wrote the book on eliminating noise and interference and IM! The leading characters are our monolithic crystal filters — over 60 off-the-shelf models at 10.7 and 21.4 MHz — plus supporting characters from 5 to 180 MHz. The plot is simple... meet your toughest filter requirements for the lowest possible cost. Write for a review.

The standard in monolithic crystal filters.

WE WROTE THE BOOK.


## Pi

**Piezo Technology Inc.**

2525 Shader Rd., Orlando, FL 32804  
(305) 298-2000

For more information, Circle No 230

## Literature

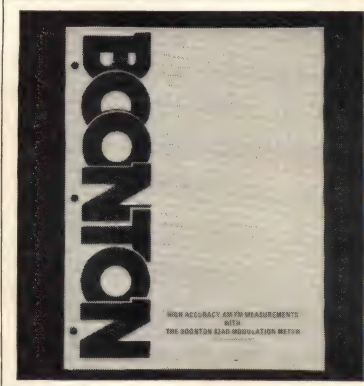


### How to interpret displayed AM/FM modulation data

App Note No 19 covers high-accuracy AM/FM measurements using this company's Model 82AD modulation meter. Topics in the 27-pg brochure include the effects of noise and spurious responses, AM detector linearity and envelope distortion and FM detector linearity and carrier shift on overall measurement accuracy. **Boonton Electronics Corp.**, Rte 287 at Smith Rd, Parsippany, NJ 07054. **Circle No 306**

# \$24.00

**Cadillac quality... Ford prices**  
Immediate Delivery • OEM Discounts



Model VQ5-3C

5V at 3A with OVP.

**New Value Line**  
open frames

- 115/230 vac input.
- Shielded transformer
- 3-year warranty.
- UL 478.
- Barrier terminals.
- Socketed I.C.'s & Semi's.

For complete details on our 'Value Line', send for bulletin 137.

## Deltron inc.

Wissahickon Avenue • North Wales, PA 19454  
Tel: 215/699-9261 Twx: 510/661-8061

AC 32

For more information, Circle No 231

# POCKET ASCII TERMINAL

MIDGET  
DUPLEX UNIT  
WITH MAN-SIZED  
CAPABILITIES

Here's \$395 worth of convenience for anyone working with digital systems. Carry it anywhere in a pocket, valise or toolkit to enter and retrieve data, run diagnostics, change constants, test data links, etc.



Look at its facilities:

- Transmits 128 ASCII codes
- Can display last 30 characters received
- Displays full 64-character ASCII set on clear 16-segment LEDs
- 25-line RS232/c compatible interface
- Single 5V supply required at 400mA typical
- 110 or 300 baud transmission selectable
- Parity codes, stop bits settable to your standard
- Obeys bell, cursor and data format control codes

Phone or write us for more details now

**GR ELECTRONICS**  
1640 Fifth Street,

Santa Monica, CA 90401.


Telephone: (213) 395-4774.

Telex: 65-2337 (BT Smedley SNM).

For more information, Circle No 232




# CAMBION. THE RIGHT SOURCE FOR...

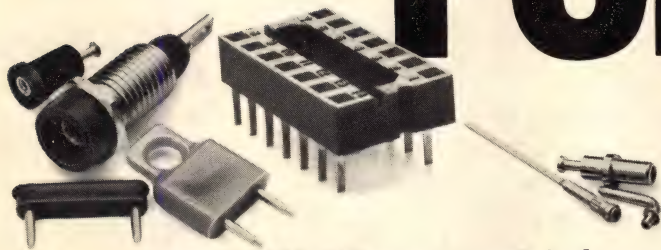

...over 23,000 different, useful electro-mechanical components including SOCKETS: low profile sockets, standard profile sockets, 6 to 64 pin sockets, soldertab sockets, wire-wrappable sockets, tin-plated sockets, gold-plated sockets ... and CONNECTOR JACKS: press mount jacks, solder mount jacks, swage mount jacks, thread mount jacks, combination pin jacks ... and IC PACKAGING: Cambi-Cards®, loaded socket cards, card files, power planes, frames, trays ... and TERMINALS: solder terminals, wire wrapost terminals, insulated terminals ... and HARDWARE: standoffs, battery holders, component clips, handles ... and COILS: shielded coils, unshielded coils, fixed coils, variable coils, custom coils, chokes ... and CONNECTOR PINS ... and CONNECTOR ASSEMBLIES ... and ... and ... and ... and ...

Get all the right connections in Cambion's Catalogs 800 and 121 – the right sources to implement your circuit design and purchasing plans!



**CAMBION®**  
**The Right Connection.**

Cambridge Thermionic Corp., 445 Concord Ave., Cambridge, MA 02238. Tel: (617) 491-5400. Telex: 92-1480. TWX: (710) 320-6399.  
New York State (201) 529-1030 Baltimore/Washington (703) 941-5470 Los Angeles (213) 326-7822  
San Francisco (408) 371-0585 Ontario (416) 671-1588 England 0433 20831  
For more information, Circle No 233 Visit Cambion at Electro '80 Booth #2028







## ...the easy way in.


*Electro/80* is the East's largest high-technology electronics convention and exhibition. Three days of hands-on demonstrations of new products and systems, and exploration of leading-edge technology in an embodiment of the *Electro/80* theme: "Electronics Leads the Way."

Save time and money by registering in advance. Complete the registration form below and mail it, together with a check for \$4 if you are an IEEE or ERA member, \$9 if you are not, before April 18. You'll receive an embossed admission badge before *Electro* opens, May 13, entitling you to speedy entrance into *Electro*.

The pre-registration price is \$1 less than at-the-door admission.

Mail the registration form today to: *Electro/80*, 999 North Sepulveda Boulevard, El Segundo, CA 90245.

Clip and Mail  Today  May 13-15, 1980  
Boston, Mass.

		<b>ADVANCE REGISTRATION FORM</b> Enclose check with this form for pre-registration: <b>\$4 IEEE/ERA Members; \$9 Non-members.</b> Mail to: <i>Electro</i> , P.O. Box 92275, Los Angeles, CA 90009 <b>Orders filled until April 18.</b> Form must be completed for registration.		<b>CIRCLE ONE LETTER IN EACH BLOCK</b>	
		00000		<b>YOUR POSITION</b> A Corporate/technical management B Design/specifying engineer C Engineering/manufacturing technician D Engineering services E Sales/Marketing F Purchasing/Procurement G Educator/Student	
Please PRINT as you want shown on badge.		Name _____ FIRST OR INITIALS LAST		Telephone (OPTIONAL) _____ AREA CODE NUMBER	
Position _____		Company/Organization _____ Address: Bus. or Home _____ City, State, Zip Code _____ STATE ZIP CODE		<b>AREA OF MAIN PRODUCT INTEREST</b> H Active components I Passive components J Hardware K Tools & production equipment L Computers M Computer peripherals N Control systems & components O Electro-optical components P Enclosures Q Instruments, indicating R Instruments, control S Mechanical components T Microwave components & systems U Power sources V Wire, cable & connectors	
<b>PERSONS UNDER 18 YEARS OF AGE NOT ADMITTED</b>					



# SUPERSWITCH

## TRANSISTORS


BUX  
BUV  
2N

## FAST RECOVERY RECTIFIERS


BXY  
BYW  
1N

IC sat 2 → 100A  
VCEO (sus) 60 → 700V

IO 1 → 60A  
VRRM 50 → 1000V  
VF/IO 0.85 → 1.5V  
trr (μs) .05 → .5



Motor Control  
Choppers  
Static Switches  
Converters  
Inverters

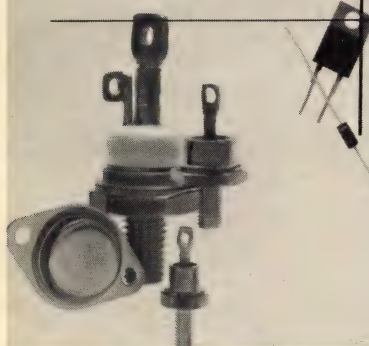

For more information and a brochure on our complete line of power switching transistors and fast recovery rectifiers, contact your local representative or the Marketing Department, Thomson-CSF Semiconductor Division.

# Quality in Quantity

One stop shopping for your semiconductor needs.



**THOMSON-CSF**

THOMSON-CSF COMPONENTS CORPORATION  
SEMICONDUCTOR DIVISION

6660 VAREL AVE., CANOGA PARK, CA 91303 • (213) 887-1010  
TELEX 69-8481 • TWX 910-494-1954

For more information, Circle No 235

## Microcomputer Design Courses

Hardware, software, systems design. You can now learn about all aspects of microcomputers through EDN's exclusive design courses.

- NEW 1979 Microcomputer Systems Reference Issue (over 400 pages) .... \$6.00  
Features: EDN's 6-chapter "Software Systems Design Course" (a step-by-step tutorial for a 16-bit μC disc operating system), μP Directory, μC Support Chip Directory, μC Board Directory.
- 1978 Microcomputer Systems Reference Issue (420 pages)..... \$5.00  
Features: EDN's 7-chapter "Software Systems Design Course" (a step-by-step tutorial for a μC disc operating system), μP Directory, μC Support Chip Directory, μC Board Directory.
- 1977 Microcomputer Systems Reference Issue (314 pages)..... \$4.00
- Microcomputer Design Course (11 chapters, 83 pages) ..... \$5.00
- EDN Software Design Course (90 pages)..... \$5.00

(Add \$1.00 to each of the above for Canada)  
(Add \$2.00 to each of the above for non-USA)

Buy in combination and save even more

- Any two items—Deduct \$1.00
- Any three items—Deduct \$2.00
- Any four items—Deduct \$3.00

NOTE: Prices Effective April 5, 1979

Payment must be included with your order. Make checks payable to: EDN Reprints

Send to: μC Reprints/EDN Magazine/ 221 Columbus Ave./ Boston, MA 02116

Please send: \_\_\_\_\_ copies 1979 μC Systems Reference Issue—\$6.00  
\_\_\_\_\_ copies 1978 μC Systems Reference Issue—\$5.00  
\_\_\_\_\_ copies 1977 μC Systems Reference Issue—\$4.00  
\_\_\_\_\_ copies μC Design Course—\$5.00  
\_\_\_\_\_ copies EDN Software Design Course—\$5.00

Total \$ \_\_\_\_\_ (Non-USA, add \$2.00 to each item, Canada add \$1.00 to each item)

Check or money order must accompany each order. No COD. MA residents add 5% Sales Tax.

Name \_\_\_\_\_ Title \_\_\_\_\_  
Company \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_

## CAMBION'S LOW PROFILE

Cambion's low profile sockets feature inverted contact design, dual face wipe contacts, Kapton® coverage for antiwicking protection, and wide-area contact openings for easy IC insertion. Available in a wide range of 8- to 64-pin position sizes, some socket models also provide beneficial center space to carry an electrolytic capacitor. Get very useful low-profile socket low-down in our Catalog 121, and get evaluation samples from Your Cambion Connection at over 100 distributor locations! Cambridge Thermionic Corp., 445 Concord Avenue, Cambridge, MA 02238, Tel: (617) 491-5400, Telex: 92-1480, TWX: (710) 320-6399.




Visit Cambion at Electro '80 Booth # 2028

**CAMBION®**  
The Right Connection.

For more information, Circle No 236



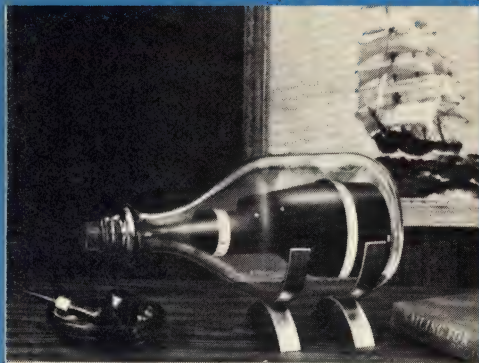

**AN AD-MU MAGNETIC SHIELD IN A GLASS BOTTLE???** Yes, Ad-Vance is often asked to do the tough/unusual in magnetic shielding. But no one has wanted a shield inside a bottle—yet! Bring your magnetic shielding problems to Ad-Vance's Problem Solving Magnetic Shielding Specialists. Request 48-page Reference Data/Catalog. **AD-VANCE MAGNETICS, INC., 625 Monroe St., Rochester, In. 46975, (219) 223-3158.**

For more information, Circle No 237

#### COMPUTER AIDED CIRCUIT ANALYSIS

A computer program is now available which performs nonlinear transient circuit analysis and simulation using DEC PDP-11 computers. **MINICAP** is a FORTRAN program which was developed especially for minicomputer use. **MINICAP** allows simulation and analysis of integrated and discrete circuits containing resistors, capacitors, inductors, voltage sources, current sources, diodes, transistors, and operational amplifiers. Computer-aided circuit simulation allows the designer greater flexibility in evaluating circuit operation and performance when varying topology, component values, or temperature.

**MINICAP** contains complete built-in models for diodes, transistors and operational amplifiers. The user need only specify parameters which are necessary to customize the device model to match a specific real device. **MINICAP** also allows modeling of batteries and zener diodes.

The program uses efficient sparse matrix techniques and an automatic time-step integration algorithm suited to small computers.


Circuit data is input in a concise, easy to learn free format. Provision is made for specifying simulation at many different temperatures and for specifying different types of output. **MINICAP** produces printed tabular outputs as well as line printer plots. A complete "snapshot" of the circuit operating conditions can also be obtained at specific timepoints.

**MINICAP** runs overlaid in 25k words of memory on any DEC PDP-11 (including LSI-11) under RT-11 or equivalent.

A linear AC analysis and simulation program is also available.

Gary Gaugler, Electronics Consultant  
5706 Seascape Court, Citrus Heights, CA 95610  
(916) 966-8076 or 966-7776

For more information, Circle No 238

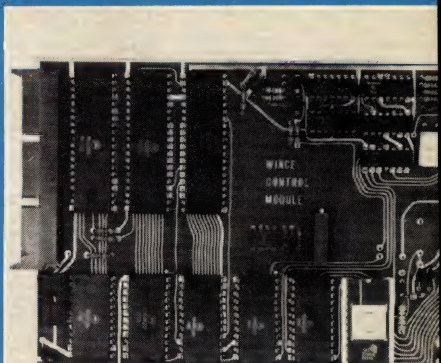

**SINGLE BOARD COMPUTER \$99.50** with 6800 M 6850 serial I/O, 2 6820 parallel I/O (32 line 512 RAM, socket for 2708, 2716, EROM. Interface modules for industrial control, data acquisition, lab instrumentation, on 44 pin 4 1/2" x 6 1/2" PCB RAM, ROM, CMOS RAM/battery, A/D, D Driver/Sensor, Serial I/O, Parallel I/O, Count Timer, IEEE 488 GPIB, floppy controller. \*O (500 piece) price WINTEK Corp.—Phone (317) 7 8428 1801 South Street, Lafayette, IN 47904

For more information, Circle No 239

## Literature

### Voice-readout systems have no moving parts

Design and operational specs for an entire line of telecommunications and voice-readout systems are included in this 12-pg catalog. It contains a descriptive and technical section explaining the capabilities of and applications for the seven products; functional and timing diagrams accompany each product photo. **Master Specialties Co., 1640 Monrovia, Costa Mesa, CA 92627.**

Circle No 307


### 394-pg catalog describes power semis

The "1980 Data Book" contains specs for more than 1200 power switching transistors, rectifiers, zener diodes and varactors. The handbook comprises eight parts: introductory material; quick reference sections on transistors, rectifiers, zeners, Varicap varactors, high-reliability products and special products; and 20 application notes. The latter section covers 113 pages and is illustrated with photos, drawings,

diagrams and graphs. **TRW Power Semiconductors, 14520 Aviation Blvd, Lawndale, CA 90260. INQUIRE DIRECT**

### Results of CP/M-based software survey

A survey directory claims that CP/M-software-based micros may be the best supported computers in the world. It contains a general section on topics such as classification, description, price and number of software packages sold as

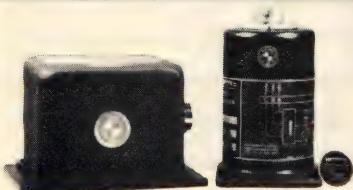

## SOLID STATE ANGULAR RATE SENSORS

Single axis, two axis, and three axis models, operate on less than 3.0 watts per axis, unlimited altitude, 10,000 hour life, accuracies of 1.0 percent. Instant startup, withstand 100 G shock, 10 G vibration. Rate ranges from 50°/sec to 3000°/sec. Bandwidth .002 Hz to 10-50 Hz depending on rate range.



**Humphrey Inc.**

Humphrey, Inc.,  
9212 Balboa Ave., San Diego, CA 92123.  
Tel. (714) 565-6631.

For more information, Circle No 240




### SAMPLE LED LIGHTS

Get free samples of new Super-Brite LED indicator lights from Industrial Devices, Inc., Edgewater, N. J. 07020. Red, green, yellow, 100,000-hr. life. Low ac or dc power-drain, high reliability, shock-resistant. Fit 1/16" holes. Hemispheric or flat-top. Ideal for solid-state and battery. Off-the-shelf for 6, 12, 24 volts.

CALL TOLL FREE 800-526-0488

For more information, Circle No 241

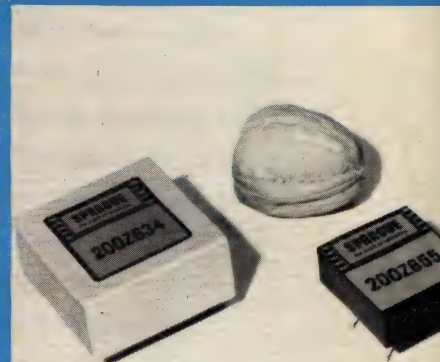


**DC-TO-DC CONVERTERS FOR DISPLAY POWER SOURCES.** Series 2002 converters change low voltage d-c inputs to higher voltage d-c outputs. For use in cash registers and scales, time-keep devices, automotive instrumentation, etc. Types powering liquid-crystal displays and light-emitting diodes, for gas plasma digital display to 0.4" high and for larger readouts to 0.7" high. Write Bulletin 41510B to Sprague Electric Co., 491 Main St., North Adams, Mass. 01247. (413) 664-44

For more information, Circle No 242



# MORE THAN JUST A LOT OF HOT AIR!

True environmental testing is much more than just creating a lot of hot air. It's testing product performance under the accurately simulated and controlled conditions of high and low temperature



Benchtop Series

optionally combined with humidity, altitude, pressure or vibration.

For 48 years — far longer than anyone else in the industry — we've been designing and manufacturing



Tenney Series


equipment that simulates these conditions in a test chamber. Our wide selection of mass-produced standard chambers satisfies just about any size and



Tenneyzphere Series


performance need. We'll also custom-build your equipment to meet special test requirements.

In addition, we offer a whole range of sophisticated features such as



Thermal Shock Series

automatic programming, logic module control, digital indicating, thermal protection, automatic humidity dialing and many others that provide enhanced



AGREE Series

performance, ease-of-operation and safety.

So, whatever your test requirements, from simple temperature programs to the complex combined-condition tests of



Walk-in Room Series

the 1980's, we offer more of what you need in experience, in scope and in sophistication.

- BURN-IN • THERMAL CYCLING
- THERMAL SHOCK • ALTITUDE
- AGREE • AUTOCLAVE • BATHS

THE LARGEST AND MOST EXPERIENCED MANUFACTURER OF ENVIRONMENTAL EQUIPMENT



**Tenney**  
ENGINEERING, INC.

1090 Springfield Rd. Union, NJ 07083  
(201)686-7870 • (212)962-0332

Visit our booth # 1112 at Electro/80 May 13-15

For more information, Circle No 249



## NO HARDWARE, NO HASSLE PROM PROGRAMMING

Advant announces the end of the technology, production crunch. PROM programmers that meet your needs... today and tomorrow.

You no longer have to struggle keeping up with PROM technology, personality boards, programmer training, production requirements and field service needs. Using the advanced MicroSupport™ hardware/software combination, we've eliminated the need for personality modules.

Simply key in two inputs on the integral keyboard and the system's software configures the programmer to the PROM manufacturer's programming specifications. Even when programming specifications change, you can reconfigure our PROM programmers in seconds.

If you change manufacturers or the manufacturer changes specifications, you can quickly and easily program in the changes and be back in operation. You can even select PROM densities ranging from 256 bits to 128K bits.

If you want to program PROMs without all of the hassle and extra hardware, find out about MicroSupport PROM Programmers. Call or write us today. We offer units for all your needs... development, production, field service.

**ADVANT**

for  
MicroSupport™  
by E-H

696 Trimble Road • San Jose, CA 95131 • (408) 946-9300

I'm tired of the hassle. Send me more information on the software-based MicroSupport PROM Programmers.

NAME \_\_\_\_\_ TITLE \_\_\_\_\_

COMPANY \_\_\_\_\_

ADDRESS \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

CITY \_\_\_\_\_


PHONE ( \_\_\_\_\_ ) \_\_\_\_\_

PROMs being used \_\_\_\_\_

MicroSupport is a Trademark of E-H International. MicroSupport products are marketed worldwide by Advant Corporation.

For more information, Circle No 251



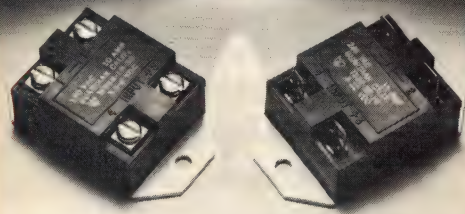

**MINI SSRs are 1/2 THE SIZE/WEIGHT.** Providing all the high performance benefits of the "older-generation" bulky types, Guardian's MSSR/TSSR SSR Series save 50% on board "real estate" and wht. They're mounting-hole interchangeable. The stud-terminal MSSR comes in 5 and 10A rms, while the TSSR—with push-on terminals—is available in 2.5, 10, 20 & 30A rms. 3 DC inputs—resistive, constant current for TTL/CMOS circuits & micro-processor compatible. 20-140VAC or 40-280VAC outputs. Synchronous switching for reduced RFI. RC network for dv/dt protection. Get details from **GUARDIAN CALIFORNIA, 4030 W. Spencer St., Torrance, CA 90503. 213-542-8651.**

For more information, Circle No 243

**25 AMP.**  
50 to 1000 PRV

**.250**  
QUICK-CONNECTS

**edi MINIBRIDGE®**

**FREE SAMPLE**

**RECTIFIER BRIDGES**

PS Series! 300 Amp. surge, 1,500V RMS dielectric strength  
U.L. Component Recognition. Lots of features. Competitively  
priced. Write or use Inquiry Number for O.E.M. application card  
for free samples and condensed catalog of bridges.

**edi®** Buy from the specialist  
**electronic devices inc.**  
21 GRAY OAKS AVE., YONKERS, N.Y. 10710  
(914) 965-4400, TWX 710 560-0021

For more information, Circle No 244

## RENT THIS SPACE

EDN 1/9-page ads feature:

- Color border highlighting
- Always next to editorial
- Rate: \$400 per insertion
- Reaches over 100,000 engineers

For details contact:

**Donna DiChiara**  
**EDN**  
**221 Columbus Ave.**  
**Boston, MA 02116**

For more information, Circle No 245

## Literature

well as a configuration section that covers memory, disc, terminal and printer requirements. \$2 (or \$1 with a self-addressed stamped envelope). **The Small Systems Group, Box 5429, Santa Monica, CA 90405. INQUIRE DIRECT**

### The pros and cons of thick-film trimming

The "Primer on Thick-Film Trimming Principles" covers the basic objectives in resistor trimming and the factors that affect trim stability. The 16-pg brochure


gives guidelines for increasing yields and discusses the major principles of laser trimming such as controlling the laser beams and determining Q rate and bite size. In addition, the catalog describes the various types of cuts: straight cuts, L cuts, L cuts with vernier cut, double cuts, double-reverse cuts, serpentine cuts and scan cuts. Diagrams and recommendations for usage accompany the description of each type of cut. **Teradyne Inc, 183 Essex St, Boston, MA 02111.**

Circle No 308

### Courses on linear ICs, $\mu$ Ps, $\mu$ C modules


Publication No 83018 describes the company's facilities and courses offered from now to June. The 16-pg bulletin discusses the capabilities and purpose of the center where the courses are held; it also provides a detailed list of the available courses, including length and cost. **Texas Instruments Inc, Technology Center, 515 W Algonquin Rd, Arlington Heights, IL 60005.**

Circle No 309

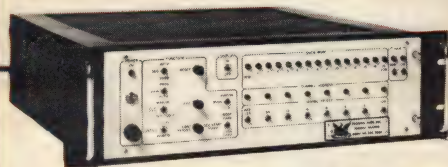

**DAS 7000, A UNIQUE SOLUTION TO HIGH SPEED A/D CONVERSION** where input amplitude cannot be predicted in advance. The 7000 series can switch channels, determine gain range, perform a 15 bit A/D conversion in less than  $\mu$ sec. Five models with thruput rates from 10 KHz to 50 KHz. A 14 bit data word is combined with 2 bits of range data for a 16 bit output word. 8 to 128 differential channels available. **PHOENIX DATA, INC., 3384 W. Osborn, Phoenix, AZ 85017. PH 602/278-8528.**

For more information, Circle No 246

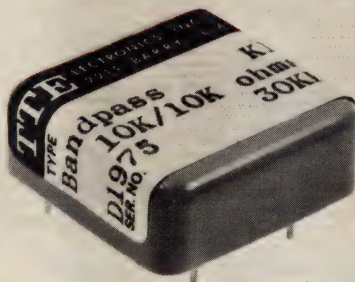

**MINIATURE FILTERS** for Highpass, Lowpass, Bandpass and Band Reject signal conditioning applications are described in the New Catalog. Flat passbands and sharp cut-offs are featured. Any frequency from 3Hertz to 300 Megahertz may be specified. These Filters are used in bio-medical, radar, analysis, modem, anti-aliasing, telemetry, sonar, seismic, control and many other electronic systems to eliminate noise and harmonics without signal distortion. Many types are available from stock. **T T Electronics, Inc., 2212 Barry Ave., Los Angeles, CA 90064, (213) 478-8224.**

For more information, Circle No 247

**People  
of all ages die of  
heart disease  
and stroke.**



**American  
Heart  
Association**


WE'RE FIGHTING FOR YOUR LIFE

For more information, Circle No 248



# The Added Touch for your System.

## Carroll's Touch Input System Kit.

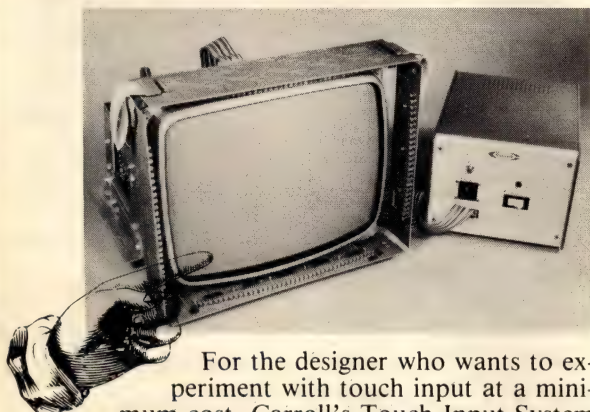

For the designer who wants to experiment with touch input at a minimum cost, Carroll's Touch Input System Kit offers a simple, economical method.

The Touch Input System Kit is produced for standard CRT monitor sizes. Easily installed, the system provides a man/machine interaction that is natural, friendly, fast and accurate.

Carroll's Touch Input System utilizes the scanning infrared beam technology which is implemented by surrounding the display area with LED emitters and phototransistor detectors in such a way as to produce a grid of infrared light beams. Whenever both an X and Y beam have been detected as broken, the coordinate information is transmitted to the host computer.

Carroll, the leader in touch technology, has been designing and manufacturing touch systems since 1974. This experience is the basis for a handbook, **Touch Technology**, available on request. It explains in detail the theory of operation, design and programming considerations, and much more about Carroll's systems.

Clip and return the coupon below to find out how you can add the benefits of touch technology to your system.

**CARROLL'S TOUCH INPUT SYSTEM KIT** For versatility, for reliability, for simplicity — no other system can touch it.



1212 Hagan Street  
Champaign, Illinois 61820  
(217) 351-1700

Please send me:

- ☐ A copy of Touch Technology.
- ☐ Detailed information and specifications on the Touch Input System Kits.
- ☐ Information on other Carroll products:
  - ☐ Datamedia Touch Terminal
  - ☐ Hewlett Packard Touch Terminal
  - ☐ Commodore PET Touch System
- ☐ Please call me to discuss placing an order.

NAME \_\_\_\_\_

COMPANY ADDRESS \_\_\_\_\_

APPLICATION AREA \_\_\_\_\_



## OUR STAND-ALONE EMULATOR IS ALMOST AS POWERFUL AS YOUR MDS

Your microprocessor development system is too valuable to be tied up debugging hardware. That's why we developed the MicroSupport™ 800A Emulator with a 20K operating system and full 16K of user memory. It's almost as powerful as your MDS.

And, it's tailor-made for debugging hardware and software. It's the only emulator that economically provides comprehensive logic and analysis capabilities... unqualified real-time operation... very flexible multiple breakpoint setting capabilities... software controlled internal/external clock... a single switch lets you reset and restart without powering down.

The 800A allows you to trace every instruction, disassemble it and examine all of the internal registers step-by-step. Problem isolation is a snap. Simply set any combination and/or sequence of breakpoints including data, address, pass count or delay. Then quickly and easily isolate the suspect areas.

You can even set your breakpoints on data from the external 8-channel logic probe. If you have better things to do with your MDS than hardware/software debugging, call or write us today and find out about the powerful stand-alone microprocessor emulator.

**ADVANT**  
for  
MicroSupport™  
by **E-H**

696 Trimble Road • San Jose, CA 95131 • (408) 946-9300

Help me save my MDS for development work. Send me more information on the powerful stand-alone MicroSupport Emulator.

NAME \_\_\_\_\_ TITLE \_\_\_\_\_

COMPANY \_\_\_\_\_

ADDRESS \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

CITY \_\_\_\_\_

PRESENT MDS \_\_\_\_\_

MicroSupport is a Trademark of E-H International. MicroSupport products are marketed worldwide by Advant Corporation.  
For more information, Circle No 209

For more information, Circle No 208



# EDN

## CAREER OPPORTUNITIES RECRUITMENT ADVERTISING

### Rates

\$60 per column inch. Column width  
1 3/4" x 10". (4-column/page)  
Full page: \$2,400 (1x B & W)

### Circulation

Over 105,000 engineers and engineering managers in all segments of the electronics industry.

### 7-Day Closing (Prior to Issue Mailing Date)

Issue Date	Mailing Date	Closing Date
May 20, 1980	May 7	April 28
June 5, 1980	May 21	May 12
June 20, 1980	June 9	May 29
July 20, 1980	July 9	June 30

#### Recruitment Hot Line

**(203) 327-  
6772/6746**

Call your ad in—  
we'll set the type at no charge.

#### Telecopier Number

**(203)  
324-9436**

Send the copy by Fax—  
we'll do the rest.

#### Mail Film to

**Lynn George,  
Recruitment Advertising Manager  
CAHNERS PUBLISHING CO.  
1200 Summer St.  
Stamford, Ct. 06905**

#### West Coast contact:

Diane Smith Daou,  
Western Regional Manager  
CAHNERS PUBLISHING CO.  
5670 Wilshire Blvd.  
Los Angeles, Ca. 90036  
(213) 933-9525

## If you currently earn between \$22,000 and \$48,000 we've got a better job for you...NOW!

Every day you spend in the wrong job is a waste of time, money and talent...YOURS! Your talents and experience are in great demand and you can choose among many rewarding opportunities available in your field. But how?

Talk to the experts at Wallach. We've been successfully recruiting professionals like yourself for over 15 years.

Nationwide opportunities include technical/management consulting, project management, R&D, test and systems evaluation in the fields of Communications, Satellites, Weapons, Intelligence, Computer, Energy, and Aerospace systems. Specific skill areas include:

- Minicomputers
- Microprocessors
- Software development
- Signal processing
- Digital systems
- Command & Control
- Radar Systems
- Communication Systems
- EW/SIGINT/ELINT
- Microwave Systems
- Electromagnetics
- Fire Control Systems

Don't waste another day in the wrong job! Call Robert Beach collect at (301) 762-1100 or send your resume in confidence. We can find you a better job. Let us prove it to you...NOW!

**WALLACH...Your career connection**

Equal Opportunity Employer Agency.

**WALLACH**  
associates, inc.

1010 Rockville Pike  
Box 6016  
Rockville, Maryland 20852  
(301) 762-1100

#### GREATER TEXAS POSITIONS

Engineering and related management openings throughout the Southwest. Top clients paying all fees and relocation expenses. Send resume in confidence to: Alan Mylar,

**KEY SEARCH**  
P. O. Box 38271  
Dallas, TX 75238



**SEARCH NORTHWEST, INC.**  
A Professional Recruiting Agency  
620 S.W. 5th—Suite 825  
PORTLAND, OREGON 97204  
(503) 222-6461

**PERSONNEL RECRUITING FOR THE  
ELECTRONICS INDUSTRY  
SALARIES FROM \$15,000 to \$60,000  
CAREER POSITIONS AVAILABLE IN:**

- \*General Mngt
- \*Engr Mngt
- \*Engineering
- \*R & D
- \*Design Engineer
- \*Product Mngt
- \*Packaging
- \*Project Mngt/Engr
- \*Mfg/Production
- \*Sales-Marketing

**FORWARD YOUR RESUME  
FOR CONFIDENTIAL CONSIDERATION,  
OR PHONE:**

**KEITH NYMAN (503) 222-6461**  
OUR SEARCH FEES ARE EXCLUSIVELY  
EMPLOYER PAID

#### ELECTRONIC CAREERS

Immediate nationwide design, test & packaging positions in electronics, aerospace, communications, instrumentation & application technology. For immediate confidential response call or send resume w/salary history to Glenn English, President, GLENN ENGLISH AGENCY, 7840 Mission Center Court, San Diego, CA 92108 (714) 291-9220. All fees paid.



# If our name doesn't turn you on, our technology will.

Look beyond our name to the technologies we're involved with — that **you** can become involved with — at Hughes Radar Systems Group.

You'll discover that we're at the cutting edge of electronics, producing advanced radar systems for the aircraft of today, tomorrow, and on into the future.

Our systems are so advanced, we even have to design and produce our own special equipment to manufacture and test them.

We use both computer-aided design and computer-aided manufacturing, and we employ some of the most advanced component fabrication processes you'll find. Anywhere.

What about the technologies and processes of tomorrow? That's why we need you — and your imagination.

We'll furnish every tool, every opportunity, and every incentive for professional growth and advancement.

With a backlog of over 4½ billion dollars and more than 1500 varied projects in the works, our needs are many and cover most disciplines — from electronics to mechanical to computer professionals. Whatever your specialty, we probably have the right spot for you.

Send your resume now to Hughes Aircraft Company, Radar Systems Group, Dept. NDE-4B, P.O. Box 92426, Los Angeles, CA 90009.

Hughes is an equal opportunity employer m/f/h. U.S. citizenship required.



**RADAR SYSTEMS GROUP**

**HUGHES**

HUGHES AIRCRAFT COMPANY



# Microcomputer Design Courses

*Hardware, software, systems design. You can now learn about all aspects of microcomputers through EDN's exclusive design courses.*

- **NEW 1979 Microcomputer Systems Reference Issue (over 400 pages)** . . . \$6.00  
Features: EDN's 6-chapter "Software Systems Design Course" (a step-by-step tutorial for a 16-bit  $\mu$ C disc operating system),  $\mu$ P Directory,  $\mu$ C Support Chip Directory,  $\mu$ C Board Directory.
- **1978 Microcomputer Systems Reference Issue (420 pages)** . . . \$5.00  
Features: EDN's 7-chapter "Software Systems Design Course" (a step-by-step tutorial for a  $\mu$ C disc operating system),  $\mu$ P Directory,  $\mu$ C Support Chip Directory,  $\mu$ C Board Directory.
- **1977 Microcomputer Systems Reference Issue (314 pages)** . . . \$4.00
- **Microcomputer Design Course (11 chapters, 83 pages)** . . . \$5.00
- **EDN Software Design Course (90 pages)** . . . \$5.00

(Add \$1.00 to each of the above for Canada)  
(Add \$2.00 to each of the above for non-USA)

**Buy in combination and save even more**

- Any two items—Deduct \$1.00
- Any three items—Deduct \$2.00
- Any four items—Deduct \$3.00

**NOTE: Prices Effective April 5, 1979**

Payment must be included with your order. Make checks payable to: EDN Reprints

Send to:  **$\mu$ C Reprints/EDN Magazine**/ 221 Columbus Ave./ Boston, MA 02116

Please send: \_\_\_\_\_ copies 1979  $\mu$ C Systems Reference Issue—\$6.00  
 \_\_\_\_\_ copies 1978  $\mu$ C Systems Reference Issue—\$5.00  
 \_\_\_\_\_ copies 1977  $\mu$ C Systems Reference Issue—\$4.00  
 \_\_\_\_\_ copies  $\mu$ C Design Course—\$5.00  
 \_\_\_\_\_ copies EDN Software Design Course—\$5.00

**Total \$** \_\_\_\_\_ (Non-USA, add \$2.00 to each item, Canada add \$1.00 to each item)

Check or money order must accompany each order. No COD. MA residents add 5% Sales Tax.

Name \_\_\_\_\_ Title \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_

## ELECTRONICS MANUFACTURING SUPPORT

Our company designs, develops and manufactures high technology point-to-point "LIMITED QUANTITY" communications equipment and systems for a broad spectrum of industrial and government markets.

We are a rapidly growing division of Harris Corporation with over 3,000 employees ideally situated in Melbourne, one of Florida's major centers for growth.

### ASSISTANT PROGRAM MANAGER

Prefer management experience as a program manager, product line manager or sub-task manager. Ability to plan, organize, implement and control all contributing divisional groups. Familiar with manufacturing technology and support activities for high technology electronic systems.

### TEST ENGINEERS

Requires BSEE with experience in checkout and trouble-shooting of sophisticated electronic systems. Will be responsible for learning system and STE theory of operation to provide guidance and assistance to test technicians. This position requires an engineer dedicated to the task of providing timely and accurate test techniques on long range programs.

### QUALITY ASSURANCE ENGINEERS

Will be responsible to define and administer the quality requirements of one or more projects. Will be the quality member of the program office and direct the quality portion of design, procurement, manufacturing, testing and shipping control quality costs. A working knowledge of military materials specifications would be beneficial.

For consideration, send resume with current salary history or call Don Quirk, 305-725-4283, Harris Corporation, Government Systems Group Operations, P.O. Box 37, Melbourne, Florida 32901.



**HARRIS**  
COMMUNICATION AND  
INFORMATION PROCESSING

An Equal Opportunity Employer—Male and Female

When you  
advertise in  
**EDN**  
magazine, you can  
be sure of  
reaching only the  
people you are  
trying to recruit.  
Every reader  
is a potential  
employee.  
We reach the  
highest  
percentage of  
all significant  
personnel in our  
industry.  
You'll find us  
not only  
effective, but a  
more economical  
magazine.





## Looking for a go-ahead career? Start where GROWTH OFFERS OPPORTUNITY.

General Dynamics is the nation's largest defense contractor. The Pomona Division is the Free World's leading producer and developer of tactical missiles and advanced weapons systems including Standard Missile-1; Standard Missile-2, Stinger, DIVAD, RAM, Viper, Sparrow AIM 7-F, Phalanx, Assault Breaker and more. These programs provide a continuing challenge for creative engineers in a growing company that is meeting America's defense needs for tactical systems.

At Pomona, advancing and applying state-of-the-art in engineering is a way of life.

The Pomona location offers a wide variety of lifestyles where every conceivable form of recreation is readily available year-round, with major entertainment offerings in nearby Los Angeles. General Dynamics offers you a chance to move to a company where growth does indeed mean career opportunities.

Professional openings range from entry level for recent college graduates to highly experienced employees in a wide spectrum of engineering disciplines:

**Digital & Analog  
Circuit Design  
Guidance & Control  
Systems Engineering  
EMI/EMC  
Test Equipment Design  
Electro-Optical  
Telemetry Systems  
Microwave/Antenna  
Fire Control Design  
Microelectronics  
Microprocessor Design  
Engineering Writers  
Hydraulic Design  
Reliability  
Power Supply  
Electronic Packaging  
Test Systems  
Radar Systems  
Signal Processing**

**Components  
Stress Analysis  
Electro-Mechanical Design  
Auto Pilot Design  
Servo Design  
Logistics  
ATE Design  
Propulsion  
Manufacturing Engineering  
Industrial Engineering**

Send your letter or resume for prompt technical review. You'll hear from us soon.

R.M. Kemp  
Vice President,  
Research & Engineering  
GENERAL DYNAMICS  
Pomona Division  
P.O. Box 3011, Pomona, CA 91766

An Equal Opportunity Employer M/F/H  
U.S. Citizenship Required

**GENERAL DYNAMICS**  
*Pomona Division*



# Designer's Guide to FIBER OPTICS

## A Designer's Guide to FIBER OPTICS

This comprehensive, authoritative guide covers all aspects of fiber-optic systems. Totalling 60 pages, it provides full understanding of the components, their key parameters and how they relate to fiber-optic system design.

- **Part 1** — Understanding glass fibers and their parameters
- **Part 2** — Matching sources and detectors to the fibers
- **Part 3** — System-design considerations
- **Part 4** — Building a fiber-optic system
- **Part 5** — What's available today: Fibers, connectors, sources and detectors

Send to:

**Fiber Optic Reprints**  
EDN Magazine  
221 Columbus Ave  
Boston, MA 02116

Please send \_\_\_\_\_ copies of  
**Designer's Guide to Fiber Optics**  
— \$4.00 (\$5.00 Non-USA)

Check or money order must accompany each order. No COD. MA residents add 5% sales tax.

Send to:

Name \_\_\_\_\_  
Title \_\_\_\_\_  
Company \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_  
State \_\_\_\_\_ Zip \_\_\_\_\_

EDN 4/20/80



# Have questions about Allen-Bradley's opportunity for Engineers?

We have answers...  
Just call toll free  
**1-800-321-6980**

(In Ohio Call 1-800-362-6120)

Talk to Tom O'Brien about your skills and background. Our continuing growth creates openings for many engineering disciplines including...

**Software Engineers** Capitalize on your Comp. Sci. or related degree and apply your software experience - assembly languages, PASCAL, FORTRAN. Utilize our VAX11/780, DEC11/34 or TEKTRONIX Development Systems to support your designs.

**Hardware/Firmware Design Engineers** Design NC and PC systems employing advanced digital techniques. Degree and 2+ years experience desired. Your involvement would include design verification using VAX11/780, DEC11/34 or TEKTRONIX Development Systems.

**Application Engineers**  
Define customer control system requirements, prepare proposals and assist new product planning.

**Product/Marketing Engineers** Research and identify product opportunities based on industry requirements utilizing your degree and 2+ years of electronics or industrial experience.

We are a dynamic part of an international corporation employing over 17,000 people. Our products apply "leading edge" computer and microprocessor technology that increases productivity for all types of industry.

**Our careers are challenging and rewarding...  
Let's Talk About It - Call Today!**

or if you prefer, send your resume to:



## ALLEN-BRADLEY

747 Alpha Drive, Highland Heights, Ohio 44143

An Equal Opportunity Employer M/F





# Professionals For Computer Peripherals

We're one of the world's leading manufacturers of electronics with a product line that has earned an international reputation for excellence. Currently we are seeking the following individuals:

## HARDWARE DESIGN ENGINEER

For graphic display terminals. A background in software is preferred.

## MARKETING MANAGER

For computer peripherals including graphic display terminals, storage devices and printers.

## SALES ENGINEER

For computer peripherals including graphic display terminals, storage devices and printers.


The ideal candidate will have at least 5-8 years experience in the above fields. BSEE or equivalent is essential. All of the above positions are located in an entirely new division located in Northern New Jersey.

Starting salaries and benefits are excellent. Please send resume including salary history in confidence to:

**BOX S-505**

An Equal Opportunity Employer, M/F

**Richard Brown  
thought he  
was too young  
to have a  
heart attack.  
He wasn't.**

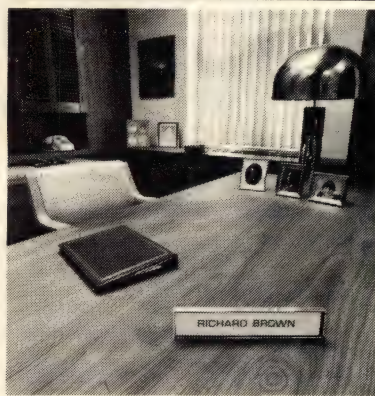

Because having a family, a good job and a bright future doesn't protect anyone from heart attack. In fact, nearly one million Americans — many with those assets — die of heart disease and stroke each year. And 200,000 of them die "too young."

The American Heart Association is fighting to reduce early death and disability from heart disease and stroke with research, professional and public education, and community service programs.

But more needs to be done.

You can help us support research and education by sending your dollars today to your local Heart Association, listed in your telephone directory.

**Put your  
money where  
your Heart is.**



**American  
Heart  
Association**

WE'RE FIGHTING FOR YOUR LIFE



If I haven't got cancer by now I'll never get it. I just don't want to know. No one in my family ever had cancer anyway. My husband told me not to worry. I was going to go but I remembered the goldfish needed feeding. It was raining out, and I was afraid I'd get sick on the way. I overslept and missed my appointment. Who cares. I don't have a doctor. I feel fine. I missed the bus. The canary got out so I chased it around for hours. I forgot. I had to get a haircut. The kids wanted ice cream first. The traffic was terrible. The weather was great so I played golf instead. I'm not sick, ever. I don't have the money right now. If cancer's in the stars, it's in the stars. I went to the doctor's on the wrong day. I went to the wrong doctor's. Maybe next week I'll make it. It's against my religion. I'm scared. I need to lose a few pounds first. I'm too busy right now. The office would fall apart without me. My father never went to the doctor's and he lived until he was 90. I don't like to think about it. Nothing's wrong with me anyway. My doctor's fingers are too cold. I'm too young to worry about cancer. I'm too old to care. I thought only rich people got that. I have to stay home and fix dinner. My boss wouldn't give me the day off anyway. There was a great sale on linens I couldn't miss. The car had a funny rattle. No one in my family ever had cancer. I'm not afraid of cancer. I lost a button that day. There was a football game on. By the time they find it, it will probably be too late. I was doing laundry. I haven't been sick a day in my life. Cancer of the what? Doctors are boring. In my business I need every hour I can get. If I die tomorrow I couldn't care less. But I eat right. I'm always exercising. I forgot to cash a check. My doctor's office is too far away. I forgot to cash a check. My dog was lost, and I had to find it. It was hunting for the cat. I feel great. It upsets me to talk about it. The kids would rip the house apart if I went out. I don't know why. If I haven't got cancer by now I'll never get it. I just don't want to know. No one in my family ever had cancer anyway. My husband told me not to worry. I was going to go but I remembered the goldfish needed feeding. It was raining out, and I was afraid I'd get sick on the way. I overslept and missed my appointment. Who cares. I don't have a doctor. I feel fine. I missed the bus. The canary got out so I chased it around for hours. I forgot. I had to get a haircut. The kids wanted ice cream first. The traffic was terrible. The weather was great so I played golf instead. I'm not sick, ever. I don't have the money right now. If cancer's in the stars, it's in the stars. I went to the doctor's on the wrong day. I went to the wrong doctor's. Maybe next week I'll make it. It's against my religion. I'm scared. I need to lose a few pounds first. I'm too busy right now. The office would fall apart without me. My father never went to the doctor's and he lived until he was 90. I don't like to think about it. Nothing's wrong with me anyway. My doctor's fingers are too cold. I'm too young to worry about cancer. I'm too old to care. I thought only rich people got that. I have to

# Stop excusing your life away.

Everyone has an excuse for not seeing their doctor about colorectal cancer. However, every year 52,000 men and women die of colorectal cancer in this country alone. Two out of three of these people might be saved by early detection and treatment. Two out of three.

So what is your excuse? Today

you have a new, simple, practical way of providing your doctor with a stool specimen on which he can perform the guaiac test. This can detect signs of colorectal cancer in its early stages before symptoms appear. While two out of three people can be saved. Ask your doctor about a guaiac test, and stop excusing your life away.



**American Cancer Society**



# Microcomputer Design Courses

*Hardware, software, systems design. You can now learn about all aspects of microcomputers through EDN's exclusive design courses.*

- **NEW 1979 Microcomputer Systems Reference Issue (over 400 pages)** ..... \$6.00  
Features: EDN's 6-chapter "Software Systems Design Course" (a step-by-step tutorial for a 16-bit  $\mu$ C disc operating system),  $\mu$ P Directory,  $\mu$ C Support Chip Directory,  $\mu$ C Board Directory.
- **1978 Microcomputer Systems Reference Issue (420 pages)** ..... \$5.00  
Features: EDN's 7-chapter "Software Systems Design Course" (a step-by-step tutorial for a  $\mu$ C disc operating system),  $\mu$ P Directory,  $\mu$ C Support Chip Directory,  $\mu$ C Board Directory.
- **1977 Microcomputer Systems Reference Issue (314 pages)** ..... \$4.00
- **Microcomputer Design Course (11 chapters, 83 pages)** ..... \$5.00
- **EDN Software Design Course (90 pages)** ..... \$5.00

(Add \$1.00 to each of the above for Canada)

(Add \$2.00 to each of the above for non-USA)

### Buy in combination and save even more

- Any two items—Deduct \$1.00
- Any three items—Deduct \$2.00
- Any four items—Deduct \$3.00

**NOTE: Prices Effective April 5, 1979**

*Payment must be included with your order. Make checks payable to: EDN Reprints*

Send to:  **$\mu$ C Reprints/EDN Magazine/** 221 Columbus Ave./Boston, MA 02116

Please send: \_\_\_\_\_ copies 1979  $\mu$ C Systems Reference Issue—\$6.00  
\_\_\_\_\_ copies 1978  $\mu$ C Systems Reference Issue—\$5.00  
\_\_\_\_\_ copies 1977  $\mu$ C Systems Reference Issue—\$4.00  
\_\_\_\_\_ copies  $\mu$ C Design Course—\$5.00  
\_\_\_\_\_ copies EDN Software Design Course—\$5.00

**Total \$** \_\_\_\_\_ (Non-USA, add \$2.00 to each item, Canada add \$1.00 to each item)

*Check or money order must accompany each order. No COD. MA residents add 5% Sales Tax.*

Name \_\_\_\_\_ Title \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_



# Advertisers Index

Acme Electric Corp . . . . .	126	General Electric Co Instrument Rental . . . . .	292, 293	Optima/Scientific-Atlanta . . . . .	268
Acopian Corp . . . . .	129	General Instrument Microelectronics Div . . . . .	141	Oshino Electric Lamp Works Ltd . . . . .	264
Advanced Micro Devices . . . . .	130-131	General Semiconductor Industries Inc . . . . .	75	Panasonic Electronic Components Div . . . . .	44
Ad-Vance Magnetics . . . . .	324	GenRad Inc . . . . .	288	Panduit Corp . . . . .	106-107
Advant . . . . .	325, 327	GenRad/Futuredata . . . . .	98-99	Phillips Chemical Co . . . . .	37
Airpax Electronics/ Cheshire Div . . . . .	315	Gould Inc . . . . .	125	Photocircuits Div, Kollmorgen Corp . . . . .	80-81
Airpax Electronics/ Frederick Div . . . . .	120	Gould Inc/Santa Clara . . . . .	281	Phoenix Data Inc . . . . .	326
Allen-Bradley Co . . . . .	50-51	Gould Inc/ Distribution & Controls Div . . . . .	256	Piezo Technology Inc . . . . .	320
AMF Inc, Electro-Components Div . . . . .	260	GR Electronics . . . . .	320	Piher . . . . .	159
AMF/Potter & Brumfield . . . . .	38	Gralex Industries . . . . .	23	Power One Inc . . . . .	277
AMP Incorporated . . . . .	114-115	Guardian California . . . . .	326	Powercube Corp . . . . .	C3
Amphenol North America, Div Bunker Ramo Corp . . . . .	221	Guardian Electric Mfg Co . . . . .	17	Power Dynamics . . . . .	312
Analog Devices . . . . .	232-233	Gulton Industries Inc, M & CS Div . . . . .	317, 319	Power/Mate Corp . . . . .	225
AP Products Inc . . . . .	290	Harris Semiconductor . . . . .	186-187	Powertec Inc . . . . .	215
Aries Electronics Inc . . . . .	314	Heinemann Electric Co . . . . .	150	RFL Industries Inc . . . . .	40
Aromat Corp . . . . .	231	Hemenway Associates Inc . . . . .	264	Robinson-Nugent Inc . . . . .	176
ATEC, an Everett/Charles Co . . . . .	127	Hewlett-Packard Co . . . . .	6-7, 90-91, 154-155, 251	Rockwell International . . . . .	198
Beckman Advanced Electronic Products . . . . .	197	Hi-G Inc . . . . .	135	Rogers Corp . . . . .	174
Berg Electronics . . . . .	282-283, 285	Hitachi America Ltd . . . . .	94-95	Scanbe, Div of Zero Corp . . . . .	168
Bodine Inc . . . . .	263	Hitachi-Denshi America Ltd . . . . .	286	Schott-America . . . . .	66
Bourns Inc . . . . .	C4	Hoffman Engineering Co . . . . .	52	Sealectro Corp . . . . .	300, 310
B & K-Precision . . . . .	133	Hollingsworth Solderless Terminals . . . . .	100	Semiconductor Circuits Inc . . . . .	123
Braemar Computer Devices . . . . .	266	Honeywell . . . . .	30-31	Howard W Sams . . . . .	208
Brand-Rex . . . . .	223	Howard Industries Inc . . . . .	104-105	Shugart Associates . . . . .	12-13
Buckeye Stamping Co . . . . .	66	Hughes Connecting Devices . . . . .	60-61	Siemens Corp . . . . .	257
Burroughs OEM Div . . . . .	137	Humphrey Inc . . . . .	324	Siemens Corp, Measurement Systems Div . . . . .	303
California Instruments . . . . .	309	Hybrid Systems . . . . .	59	Signal Transformer Co Inc . . . . .	235
Cambridge Thermionic Corp . . . . .	321, 323	ILC Data Devices . . . . .	250	Software Dynamics . . . . .	199
Camcar, Div Textron . . . . .	318	Industrial Devices . . . . .	324	Sola Electronics . . . . .	158
Capar Components Corp . . . . .	261	Industrial Electronic Engineers Inc . . . . .	243	Solid State Scientific . . . . .	205
Carborundum/Graphite . . . . .	29	Information Handling Systems . . . . .	112-113	Sonimag . . . . .	301
Carroll Mfg . . . . .	327	Instruments for Industry Inc . . . . .	299	Souriau Inc . . . . .	294
Cherry Electrical Products Inc . . . . .	4	Intel Corp . . . . .	42-43, 92	Spectra-Strip . . . . .	190
Chicago Switch . . . . .	270	Interface Technology . . . . .	226	Spectral Dynamics Corp . . . . .	262
Chomerics Inc . . . . .	160	International Rectifier . . . . .	55	Spectrol Electronics Corp . . . . .	273
C Itoh . . . . .	240	Intersil Inc . . . . .	25-28	Spectronics Inc . . . . .	259
Clinton Electronics . . . . .	57	Interstate Electronics . . . . .	248	A W Sperry Instruments Inc . . . . .	311
Columbia Data Products Inc . . . . .	270	ITT Cannon Electric . . . . .	214	Sprague Electric Co . . . . .	149, 324
Dale Electronics Inc . . . . .	88	ITT Components . . . . .	102, 103, 164, 165	Sprague-Goodman Electronics . . . . .	302
Damon Corp . . . . .	76	ITT Shadow . . . . .	291	Stackpole Carbon Co . . . . .	207
Data General Corp . . . . .	252	E F Johnson Co . . . . .	289	Standard Power Inc . . . . .	41
Data Translation Inc . . . . .	145	Kawecki Berylco Industries Inc . . . . .	237	Switchcraft . . . . .	316
Datel Intersil . . . . .	308	Keithley Instruments Inc . . . . .	284	Synertek Inc . . . . .	219
Datron . . . . .	230A, B	Kepco Inc . . . . .	67	Tano Corp . . . . .	200
Delttron Inc . . . . .	320	Kikusui International Corp . . . . .	151	Tecor Electronics Inc . . . . .	271
Dialight, a North American Philips Co . . . . .	307	Kulka Electric Corp . . . . .	72	Technical Materials . . . . .	36
Diceon Electronics . . . . .	276	Lambda Electronics Corp . . . . .	295-298, 298A-B	Technit Inc . . . . .	167
Digital Equipment Corp . . . . .	82-83	Leader Instruments Corp . . . . .	77	Tektronix Inc . . . . .	8-9, 175, 313
Digital Pathways Inc . . . . .	188	Littelfuse Inc . . . . .	216	Teledyne Crystalonics . . . . .	304
Digitran Co . . . . .	249	Mallory Capacitor Corp . . . . .	53	Teledyne Philbrick . . . . .	58
DOSC OEM Products Div . . . . .	286	Manhattan Electric Cable Corp . . . . .	299	Tenney Engineering Inc . . . . .	325
Dow Corning . . . . .	85, 279	Memodyne . . . . .	206	Texas Instruments Inc . . . . .	153, 305
Dranetz Engineering Labs . . . . .	300	Methode Development Co . . . . .	10-11	Therm-O-Disc Inc . . . . .	312
Dylon Corp . . . . .	65	Metex Corp . . . . .	278	Thomson-CSF/Semiconductor Div . . . . .	323
Eagle Magnetic . . . . .	301	Micro Link Corp . . . . .	272	TII Industries . . . . .	300
Eagle Picher . . . . .	33	Micrometals Inc . . . . .	76	Tricon Industries . . . . .	224
Eaton Corp/Macrodata . . . . .	119	Micro Networks Corp . . . . .	255	Triplett Corp . . . . .	178
Elco Corp . . . . .	275	Micro Switch . . . . .	287	TRW/Cinch Connectors . . . . .	78-79
Electrocube . . . . .	314	Mini-Circuits Laboratory . . . . .	48-49, 228, 240	TRW/LSI Products . . . . .	139
Elec-Trol Inc . . . . .	189	Monolithic Systems . . . . .	245	TT Electronics Inc . . . . .	323
Electronic Convention . . . . .	322	Mostek . . . . .	157	Ultra Violet . . . . .	302
Electronic Devices Inc . . . . .	326	Motorola . . . . .	244	Union Carbide Corp . . . . .	269
Electro Scientific Industries . . . . .	14	Multiwire Div, Kollmorgen Corp . . . . .	239	Unimax Switch Corp . . . . .	56
Electro-Space Fabricators Inc . . . . .	73	Murata Corp . . . . .	264	Universal Data Systems . . . . .	96
Electro Switch Corp . . . . .	272	National Semiconductor Corp . . . . .	19-22	Vector Electronic Co . . . . .	265
Elgar Corp . . . . .	166	NEC Electron Inc . . . . .	34-35	Vernitech . . . . .	32
Endicott Research Group . . . . .	227	J M Ney Inc . . . . .	258	Victory Engineering Corp . . . . .	65
Engelhard/Divisional . . . . .	306	Nichicon (America) Group . . . . .	267	VRN International . . . . .	147
Epson America . . . . .	74	Nicolet Instruments . . . . .	142-143	Wavetek Indiana Inc . . . . .	3
E-Z Hook . . . . .	280	Nicolet Scientific Corp . . . . .	70	Westcode . . . . .	238
Fairchild Semiconductor Operations Div . . . . .	301	OK Machine & Tool . . . . .	62, 110, 111	Wintek . . . . .	324
John Fluke Mfg Co Inc . . . . .	C2	Optical Electronics . . . . .	32	Xycom (formerly PCS Inc) . . . . .	68-69
Frequency Devices . . . . .	177				
Frequency & Time Systems Inc . . . . .	246				
Gates Energy Products Inc . . . . .	86				
Gary Gaugler . . . . .	324				
General Electric . . . . .	108, 247				

This index is provided as an additional service. The publisher does not assume any liability for errors or omissions.



# Looking Ahead: Trends and Forecasts

## Semi production equipment: up 17.1%/yr

US semiconductor production and test-equipment markets will exhibit 17.1% annual growth to reach \$2.3 billion in 1989, up from \$465 million last year, according to Frost & Sullivan, New York City.

Contributing to this healthy growth rate will be increasing IC density, requiring more stringent production and testing methods (VLSI devices will account for 56% of all IC production by 1989). Another key contributor: explosive demand for photovoltaic cells by the latter part of the decade.

MARKET FOR SEMICONDUCTOR PRODUCTION & TEST EQUIPMENT

ANNUAL GROWTH RATE (%)  
1979 TO 1989

WAFER PREPARATION	16.4
PATTERN & MASK GENERATION	15.4
WAFER MASKING	17.0
WAFER PROCESSING	16.3
ASSEMBLY EQUIPMENT	23.9
TOTAL	17.1

SOURCE: FROST & SULLIVAN INC

The test-equipment market alone will grow 17.5% annually, spurred on by shock, vibration, temperature and other environmental testing needs. Electronic-function tests, accounting for the market's largest equipment segment, will be increasingly conducted on wafers, as well as on end products.

Additionally, denser geometries and finer line widths will propel fast-climbing markets for projection printers, E-beam systems and X-ray printers, which will come into their own during the latter half of the 1980s.

F&S foresees cold fabrication processes increasingly preferred to hot ones that cause "runout" and wafer warping, as increasing wafer size necessitates very tight control over dimensional variations. And ion implantation should displace diffusion techniques, while

sputtering will increasingly substitute for thermal-evaporation processes.

In other developments, a growing market will arise for floating-zone equipment; furthermore, new types of equipment for making ribbon-type silicon materials will become available by the mid-1980s.


Other trends include the increasing use of in-line systems for wafer masking (replacing manual handling) and a healthy market (growing fourfold over the next 5 yrs) for digitizers to encode circuit diagrams.

## Electronics on the rise in automotive systems

Automobile manufacturers will increasingly turn to high-technology electronic products in their attempt to meet more stringent federal fuel-economy and emissions standards, analysts predict.

Annual production of electronic engine systems, growing at a 22.3% rate between 1978 and 1985, will reach \$3.4 billion by 1985 and top \$3.9 billion by 1990, forecasts Gnostic Concepts Inc, Menlo Park, CA. Electronic-convenience-system production, rising at an average annual rate of 11.1% through 1985, will spurt to \$919 million by that date and exceed \$2.4 billion by 1990—up from \$440 million in 1978. Automotive

ELECTRONIC-ENGINE-SYSTEMS PRODUCTION



SOURCE: GNOSTIC CONCEPTS INC

electronic components' value, almost \$60 million in 1978, will top \$460 million by 1990.

## Tight supply seen for polycrystalline silicon

Reports of an industry-wide shortage of polycrystalline silicon, the base material of integrated circuits, have been greatly exaggerated, say experts. Thus, while suppliers are placing shipments of the material on an allocation basis and leadtimes on new orders have typically been running 4 to 5 months, what emerges is not a shortage but rather a tight supply of ICs.

The reasons? Heavy demand for ICs, overcapacity problems and anticipation of explosive demand for silicon photovoltaic cells by the middle of the decade.

But the potential for a future silicon shortage does exist, based on current capacity and future demand, contends Dan Rose, president of Rose Asso-

SILICON-WAFER USAGE BY US IC FIRMS

	1978	1979	1983
VALUE OF SHIPMENTS (\$ MILLIONS)	360	468	731
WAFERS UTILIZED (MILLION IN. <sup>2</sup> )	513	666.9	895

SOURCE: ROSE ASSOCIATES

ciates, Los Altos, CA. In 1978, usage of silicon in solar cells amounted to only about 8 million in.<sup>2</sup>, Rose notes, but he predicts solar-cell production will utilize a phenomenal 6.3 billion in.<sup>2</sup> by 1986—roughly 10 times that expected to be required for IC-device production at that time.

Material for this page developed from *Electronic Business* magazine and other sources by Jesse Victor, Assistant/New Products Editor, and Joan Morrow, Production Editor.



# Reduce Custom Power Supply Time and Cost



With a handful of Powercube's Cirkircuitblock<sup>®</sup> modules and a few clip leads, you can quickly synthesize an infinite variety of custom power supplies.

Cirkircuitblock modules have demonstrated capability to meet most design needs and are packaged within a 1" x 1" x 2" basic building block format so you can assemble supplies of any complexity to any form factor appropriate in building block fashion.

Design time to operating prototype can be reduced by more than 50% because conventional breadboarding is eliminated. Your quickly assembled "breadboard" of modules becomes your operating prototype.

Cirkircuitblock modules utilize space technology but are specified and priced for industrial as well as military applications. They can substantially reduce the "as installed" power supply costs in airborne and ground based instruments such as receivers, navigational systems, displays, stores management systems, and communication gear.

Cirkircuitblock functional modules not only save design time and money; they are also a lot of fun to work with.

Circle the reader service number to learn more about Powercube's Cirkircuitblock functional modules. Send for free catalogues describing the entire Cirkircuitblock module family and packaging styles for complete power supplies.

 **POWERCUBE**  
A SUBSIDIARY OF UNITRODE CORPORATION

POWERCUBE CORPORATION  
EIGHT SUBURBAN PARK DRIVE  
BILLERICA, MASSACHUSETTS 01821  
(617) 667-9500

For more information, Circle No 256



# Pièce de Résistance...



## The trimmer gourmet's choice.

Feast your eyes on Bourns Trimpot® trimmers — the choicest and broadest trimmer line anywhere. A banquet of trimmers with outstanding quality and performance at cost-effective prices to please the most discriminating design connoisseur.

### Le Plus Grand Menu

Rectangular, square or round  
Sealed or open-frame  
Wirewound or cermet  
Single or multi-turn

Select the size, shape, type of element and method of adjustment to suit your taste. They're served in an assortment of resistance values and pin styles to satisfy all of your design needs.

Bourns is dedicated to serving all of your trimmer requirements . . . both now and in the future. Look for future innovations in down-sizing, increased performance and cost-effective

improvements. We're working on design solutions today for your application needs tomorrow.



**Introducing the Trim Bin™ Trimmer Kit.** Here are some appetizers to tantalize your trimmer palate: A complete assortment of the most popular Trimpot trimmers and MFT™ trimmers/resistors in a convenient package for just \$99.95\*. A value of over \$200, the kit contains 127 parts representing 50 varieties of resistances and pin styles, plus adjustment tools and design aids. It's available from your local Bourns distributor.

Vive la Résistance! Call your Bourns representative or distributor for more information and for your new 94-page TR-1 trimmer catalog.

TRIMPOT DIVISION, BOURNS, INC., 1200 Columbia Avenue, Riverside, CA 92507. Ph: 714 781-5320. TWX: 910 332-1252.

European Headquarters: Bourns AG, Zugerstrasse 74 6340 Baar, Switzerland. Ph: 042 33 33 33. Telex: 78722.

\*Domestic U.S.A. price only.

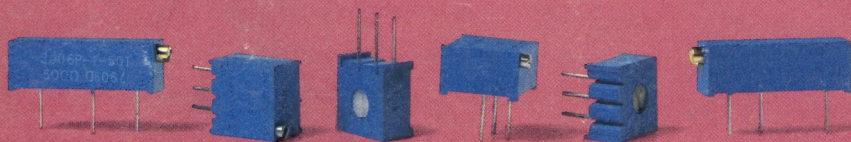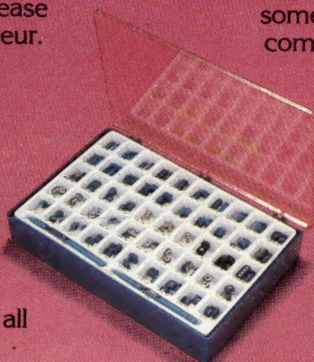

For Immediate Application—Circle 100 For Future Application—Circle 200

The last word in resistive components  
**BOURNS**